

STANCOR







CATALOG

S-106 1961-62



TRANSFORMERS

**RADIO • TELEVISION
COMMUNICATIONS • INDUSTRIAL**



STANCOR ELECTRONICS, INC., Formerly Chicago Standard Transformer Corp.

3501 WEST ADDISON STREET • CHICAGO 18, ILLINOIS

INdependence 3-7400

STANCOR PART NUMBER INDEX

Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section	Stancor Page & No. Section
A-52C 7g	A-4719 7g	A-8221 24	C-1413 19e	FC-11 27e	P-3062 16d	P-6457 17b	P-8337 26c	TA-11 11c
A-53 7f	A-4722 9a	A-8222 24	C-1414 19e	FC-12 27e	P-3064 17a/29d	P-6458 17b	P-8338 26c	TA-12 11c
A-53C 7g	A-4723 9a	A-8223 24	C-1415 19e	HO-250 24	P-4004 14e	P-6459 21c	P-8339 26c	TA-13 11c
A-62C 7g	A-4742 7d	A-8224 24	C-1420 19b	HO-251 24	P-4019 17a	P-6461 17b	P-8340 26d	TA-14 11c
A-63C 7g	A-4744 8e	A-8225 24	C-1421 19c	HO-252 24	P-4022 17c	P-6462 17a	P-8341 26d	TA-15 10d
A-64C 7g	A-4745 7g	A-8226 24	C-1515 19b	HO-253 24	P-4026 16d	P-6463 17a	P-8342 26e	TA-16 10d
A-73C 7g	A-4747 7e	A-8227 24	C-1645 19f	HO-254 24	P-4047 14d	P-6464 17a	P-8343 26e	TA-17 10d
A-2203 5c	A-4748 8e	A-8228 24	C-1646 19d/28a	HO-255 24	P-4060 20f	P-6465 17a	P-8344 26e	TA-18 12a
A-2312 5f	A-4749 8e	A-8229 24	C-1702 19f	HO-256 24	P-4061 20f	P-6466 17a	P-8345 26c	TA-19 12a
A-2313 5d/29a	A-4752 9a	A-8230 24	C-1703 19d/28b	HO-257 24	P-4062 20f	P-6467 14d	P-8346 27b	TA-20 12a
A-2855 5b	A-4761 9c	A-8231 24	C-1706 19b/28b	HO-258 24	P-4063 20f	P-6468 16e	P-8347 27b	TA-21 12a
A-3250 6b	A-4762 9c	A-8232 24	C-1707 19b/28b	HO-259 24	P-4064 20b	P-6469 17b	P-8348 27a	TA-22 12a
A-3303 5f/29a	A-4763 9c	A-8233 24	C-1708 19b	HO-260 24	P-4065 20b	P-6470 20b	P-8349 26d	TA-23 12b
A-3304 5e	A-4765 9d	A-8234 24	C-1709 19c/28b	HO-261 24	P-4082 16d	P-6471 20b	P-8350 26d	TA-24 12b
A-3307 5e	A-4770 6b	A-8235 24	C-1711 19c	HO-262 24	P-4083 16d	P-6472 20b	P-8351 26e	TA-25 12b
A-3310 5c	A-4773 8a	A-8236 24	C-1718 19f	HO-263 24	P-4086 16e	P-6473 20c	P-8352 26b	TA-26 12b
A-3311 5f	A-4774 8a	A-8237 24	C-1720 19g	HO-264 24	P-4088 16d	P-6474 20c	P-8353 26a	TA-27 12b
A-3315 6b	A-4778 7e	A-8238 24	C-1721 19d/28b	HO-265 24	P-4089 17a	P-6476 20c	P-8354 26a	TA-28 12b
A-3327 5d	A-4779 7e	A-8239 24	C-1722 19e/28b	HO-266 24	P-4091 17b	P-6477 20c	P-8355 27b	TA-29 12c
A-3328 5c	A-4780 7e	A-8240 24	C-1723 20a	HO-267 24	P-4096 17b	P-6478 20c	P-8356 27b	TA-30 12c
A-3329 5d	A-7947 6c	A-8241 24	C-2301 8d	HO-268 24	P-4097 17b	P-6479 20c	PA-8421 15b	TA-31 12c
A-3330 6a/29a	A-7949 6c	A-8242 24	C-2303 19c/28b	HO-269 24	P-5000 16d	P-6480 20c	PC-8301 18e	TA-32 12c
A-3332 5c/29a	A-8050 13a	A-8243 24	C-2304 19c/28b	HO-270 24	P-5002 17b	P-6481 20d	PC-8302 18e	TA-33 12c
A-3335 5f	A-8051 13a	A-8244 24	C-2305 19c	HO-271 24	P-5008 17c	P-6482 20d	PC-8303 18e	TA-34 12d
A-3336 6a	A-8052 13a	A-8245 24	C-2307 19g	HO-272 24	P-5009 17c	P-6483 20d	PC-8304 18e	TA-35 12d
A-3337 5c	A-8053 13a	A-8246 24	C-2308 19e	HO-273 24	P-5014 17a	P-6484 20d	PC-8305 18e	TA-36 12d
A-3496 5f	A-8054 13a	A-8247 24	C-2309 19c/28c	HO-274 24	P-5015 17b	P-6485 20d	PC-8306 18e	TA-37 12d
A-3800 5e	A-8056 13a	A-8248 24	C-2317 10b	HO-275 24	P-5016 17b	P-6486 20d	PC-8401 14a	TA-38 12d
A-3801 5e	A-8060 13b	A-8249 24	C-2318 19b	HO-276 24	P-5059 14e/26c	P-6487 20d	PC-8402 14a	TA-39 12e
A-3802 5e	A-8061 13b	A-8250 24	C-2325 19d/28c	HO-277 24	P-5062 22a	P-6488 20d	PC-8403 14a	TA-40 12e
A-3808 9e	A-8062 13b	A-8251 24	C-2326 19d/28c	HO-278 24	P-5063 22a	P-6489 20e	PC-8404 14a	TA-41 12e
A-3812 9e	A-8063 13b	A-8252 24	C-2327 19d/28c	HO-279 24	P-5064 22a	P-6490 20d	PC-8405 14a	TA-42 12e
A-3817 8e	A-8064 13b	A-8253 24	C-2328 19e/28c	HO-280 24	P-5065 22a	P-6491 20f	PC-8406 14b	TA-43 12e
A-3818 6c	A-8066 13b	A-8254 24	C-2332-1 13c	HO-281 24	P-6001 14d	P-6492 16e	PC-8407 14b	TA-44 12f
A-3820 6c	A-8072 13b	A-8255 24	C-2334 19e/28c	HO-282 24	P-6007 14e	P-6493 20e	PC-8408 14b	TA-45 12f
A-3822 5a	A-8080 6f	A-8256 24	C-2335 19c	HO-283 24	P-6008 14e	P-6494 20e	PC-8409 14b	TA-46 12f
A-3823 5a/29a	A-8081 6f	A-8257 24	C-2340 10c	HO-284 24	P-6010 15a	P-6495 20e	PC-8410 14c	TA-47 12f
A-3824 5a/29a	A-8082 6f	A-8258 24	C-2341 10c	HO-285 24	P-6011 15a	P-6496 21a	PC-8411 14c	TA-48 12h
A-3825 5a/29b	A-8090 8e	A-8259 24	C-2343 28c	HO-286 24	P-6012 15a	P-6497 20e	PC-8412 14c	TA-49 12h
A-3829 9e	A-8091 8e	A-8260 24	C-2344 19b	HO-287 24	P-6013 15a	P-6499 20d	PC-8413 14c	TA-50 12h
A-3830 5b/29b	A-8092 5c	A-8261 24	C-2345 8d	HO-288 24	P-6014 15a	P-8025 18b	PC-8414 14c	TA-51 12h
A-3831 5f	A-8093 5f	A-8262 24	C-2346 8d	HO-289 24	P-6119 15a	P-8026 18b	PC-8417 15b	TA-52 12e
A-3833 8e	A-8094 5e	A-8263 24	C-2685 16c	HO-290 24	P-6123 22c	P-8027 18b	PC-8418 15b	TA-53 12c
A-3836 8e	A-8095 6e	A-8264 24	C-2686 16c	HO-291 24	P-6124 22a	P-8028 18b	PC-8419 15b	TA-54 12d
A-3837 6d	A-8096 6e	A-8265 24	C-2687 16c	HO-292 24	P-6125 22c	P-8029 18b	PC-8420 15b	TA-55 12f
A-3838 6d	A-8097 6e	A-8266 24	C-2688 16c	HO-293 24	P-6131 20f	P-8030 18c	PC-8422 14b	TA-56 11d
A-3839 5f	A-8098 5e	A-8267 24	C-2689 16c	HO-294 24	P-6133 16d	P-8031 18c	PM-8401 14a	TA-57 11d
A-3841 6b	A-8099 6e	A-8268 24	C-2690 16c	HO-295 24	P-6134 17a/29d	P-8032 18c	PM-8402 14a	TA-58 11d
A-3842 6b	A-8101 6c	A-8269 24	C-2691 16c	HO-296 24	P-6135 16e	P-8033 18c	PM-8403 14a	TA-59 11d
A-3845 9e	A-8102 6f	A-8270 24	C-2704 19c	HO-297 24	P-6137 16e	P-8034 18c	PM-8404 14a	TA-60 11d
A-3848 5a	A-8103 6f	A-8271 24	C-2705 19d	HO-298 24	P-6138 17b	P-8035 18c	PM-8405 14a	TC-1 12g
A-3849 5b/29b	A-8104 6d	A-8272 24	C-2706 19e	HO-299 24	P-6139 17b	P-8040 18a	PM-8406 14b	TC-2 12g
A-3850 5a/29b	A-8105 6f	A-8273 24	DY-1A 23a	HO-300 24	P-6141 22a	P-8041 18a	PM-8407 14b	TP-1 12i
A-3851 5e	A-8106 7a	A-8274 24	DY-2A 23a	HO-301 24	P-6143 14c	P-8042 18a	PM-8408 14b	VBO-200 27c
A-3852 5b/29b	A-8107 7a	A-8275 24	DY-8A 23a	HO-302 24	P-6144 17c	P-8043 18a	PM-8409 14c	VBO-201 27c
A-3856 5a/29b	A-8108 7a	A-8276 24	DY-9A 23a	HO-303 24	P-6146 21b	P-8044 18a	PM-8410 14c	VO-100 28f
A-3857 5f	A-8109 6f	A-8277 24	DY-10A 23a	HO-304 24	P-6160 22c	P-8130 17b	PM-8411 14c	VO-101 28f
A-3859 7b	A-8110 27d	A-8278 24	DY-11A 23a	HO-305 24	P-6161 22c	P-8150 21d	PM-8412 14c/27a	VO-102 28f
A-3870 5b/29c	A-8111 27c	A-8279 24	DY-12A 23a	HO-306 24	P-6166 21a	P-8151 21d	PM-8412 14c/27b	VO-103 28f
A-3871 9e	A-8112 28d	A-8280 24	DY-13A 23b	HO-307 24	P-6287 22a	P-8154 27a	PM-8412 14c/27b	VO-104 28f
A-3872 5e	A-8113 28d	A-8281 24	DY-14A 23b	HO-308 24	P-6298 22c	P-8155 26a	PM-8418 15b	VO-105 28f
A-3876 5c/29c	A-8114 5d/29c	A-8282 24	DY-15A 23b	HO-309 25	P-6299 22f	P-8156 27a	PM-8419 15b	VO-106 28f
A-3877 5c/29c	A-8115 28d	A-8283 24	DY-16A 23b	HO-310 25	P-6301 20a	P-8157 27b	PM-8420 15b	VO-107 28f
A-3878 5d/29c	A-8116 28d	A-8284 24	DY-17A 23b	HO-311 25	P-6302 16e	P-8158 26a	PM-8422 14b	VO-108 28f
A-3879 5d/29c	A-8119 24	A-8285 24	DY-18A 23b	HO-312 25	P-6305 16e	P-8159 26e	PM-8423 14b	VO-109 28f
A-3880 5b/29c	A-8120 27d	A-8287 24	DY-19A 23b	HO-313 25	P-6308 17a/29d	P-8160 26d	PS-8415 15b	VO-110 28f
A-3881 5d	A-8121 27c	A-8288 24	DY-20A 23c	HO-314 25	P-6309 17a	P-8161 27b	PS-8416 15b	VO-111 28f
A-3882 6c	A-8122 27c	A-8289 24	DY-21A 23c	HO-315 25	P-6315 14e/27a	P-8162 27a	PSU-2000 21f	VO-112 28f
A-3883 6c	A-8123 28d	A-8290 24	DY-22A 23c	HO-316 25	P-6317 19a	P-8163 27a	PSU-3000 21f	VO-113 28f
A-3885 5e	A-8124 27c	A-8291 24	DY-23A 23c	HO-317 25	P-6318 19a	P-8164 26b	PT-8311 18d	VO-114 28f
A-3890 5b	A-8125 27c	A-8292 24	DY-24A 23c	HO-318 25	P-6333 17c	P-8165 26d	PT-8312 18d	WC-1 A 23g
A-3891 10a	A-8126 27c	A-8293 24	DY-25A 23c	HO-319 25	P-6338 17c	P-8166 26c	PT-8313 18d	WC-2 A 23g
A-3892 10a	A-8127 24	A-8294 24	DY-26A 23c	HO-320 25	P-6348 14d	P-8167 26b	PT-8314 18d	WC-3 A 23g
A-3893 10a	A-8128 24	A-8295 24	DY-27A 23c	HO-321 25	P-6358 15b	P-8168 26a	PT-8315 18d	WC-4 A 23g
A-3894 10a	A-8129 24	A-8296 24	DY-28A 23d	HO-322 25	P-6371 22c	P-8169 27a	PV-6441 22b	WC-5 A 23g
A-3898 10a	A-8130 24	A-8297 24	DY-29A 23d	HO-323 25	P-6375 22f	P-8170 27b	PV-6442 22b	WC-6 A 23g
A-3899 10a	A-8131 24	A-8298 24	DY-30A 23d	HO-324 25	P-6376 22f	P-8171 27a	PV-6443 22b	WC-7 A 23g
A-4208 8c/9b	A-8132 24	A-8299 24	DY-31A 23d	HO-325 25	P-6377 22f	P-8172 26a	PV-6444 22b	WC-8 A 23g
A-4210 9a	A-8133 24	C-1001 19c/28a	DY-32A 23d	HO-326 25	P-6378 22f	P-8173 14d	RT-201 16a	WC-9 A 23h
A-4212 9b	A-8134 24	C-1002 19b	DY-33A 23d	HO-327 25	P-6379 22f	P-8174 14d	RT-202 16a	WC-10 A 23h
A-4292 9a	A-8135 24	C-1003 8d/19b	DY-34A 23d	HO-328 25	P-6383 22d	P-8175 14d	RT-204 16a	WC-12 23h
A-4350 7c	A-8136 24	C-1080 20a/28a	DY-35A 23e	HO-329 25	P-6385 22d	P-8176 14d	RT-206 16a	WC-13 23h
A-4351 7e	A-8137 24	C-1215 20a/28a	DY-36A 23e	HO-330 25	P-6387 22d	P-8177 14d	RT-208 16a	WC-14 A 23h
A-4352 7e	A-8138 24	C-1227 20a	DY-37A 23e	HO-331 25	P-6389 22d	P-8178 21d	RT-408 16a	WC-15 23h
A-4407 7c	A-8139 24	C-1277 20a	DY-38A 23e	HO-332 25	P-6390 22d	P-8181 29d	RT-2012 16a	WC-16 A 23h
A-4420 7g	A-8140 28d	C-1279 20a	DY-39A 23e	HO-333 25	P-6410 22c	P-8190 17a/29d	RT-4012 16a	WC-17 23h
A-4430 5e	A-8141 28d	C-1325 20a/28a	DY-40A 23e	HO-334 25	P-6415 22e	P-8191 17a/29d	RTC-8628 23g	WC-18 A 23h
A-4431 5d	A-8142 28d	C-1333 20a	DY-41A 23e	HO-335 25	P-6425 21e	P-8192 29	RTC-8629 23g	WM-8 A 13
A-4432 5e	A-8143 28d	C-1355 19b	DY-42A 23e	HO-336 25	P-6426 21e	P-8193 16b	TA-1 11a	
A-4701 9b	A-8144 28e	C-1400 19f	DY-43A 23f	HO-337 25	P-6428 17d	P-8194 16b	TA-2 11a	
A-4702 9a	A-8145 28e	C-1401 19f	DY-44A 23f	HO-338 25	P-6429 17d	P-8195 10e	TA-3 11a	
A-4703 9b	A-8146 28e	C-1402 19g	DY-45A 23f	HO-339 25	P-6430 17d	P-8307 14e	TA-4 11a	
A-4705 7d	A-8147 28e	C-1403 19g	DY-46A 23f	HO-340 25	P-6431 17d	P-8331 26c	TA-5 11a	
A-4706 7d	A-8148 28e	C-1404 19g	DY-47A 23f	P-1834-3 17e	P-6432 16e	P-8332 26b	TA-6 11b	
A-4708 7d	A-8149 28e	C-1405 19g	DY-48A 23f	P-3020 1				

TRANSFORMER CLASSIFIED INDEX

TELEVISION APPLICATIONS

Audio Outputs	29
Deflection Yokes	23
Filament Transformers	29
Filter Chokes	28
Focus Coils	27
Horizontal Blocking-Oscillator	27
Horizontal Deflection Output (Flyback)	24-25
Isolation Testing Transformer	22

Linearity Coils	23
Picture Tube Booster	29
Powers	26-27
Television Booster	29
Vertical Blocking Oscillator	27
Vertical Deflection Output	28
Width Controls	23

RADIO, INDUSTRIAL & COMMUNICATION APPLICATIONS

AUDIO TRANSFORMERS

Audio Chokes	8
Audio Filters	10
Band Pass Filter	10
Crystal Recorder Output	7
Driver Transformers	8-9
High Fidelity Output	13
Hum-Reducing	6
Intercommunicator and Transceiver	8
Line Driver	8-9
Line to VC Output	6-7
Low Pass Filter	10
Microphone or Line Input	7
Microphone, Pickup or Line to Grid Input	7
Multi-Purpose Interstage	8
Plate Modulation	9-10
Output	4-5-6-7-11-12-13
"Poly-Pedance" Driver	9
"Poly-Pedance" Line Driver	9
"Poly-Pedance" Modulation	10
Push-Pull Plates to Push-Pull Grids	8-9
Push-Pull Plates to VC Output	5
70.7 Volt Line to VC Output	6
25 Volt Line to Voice Coil	6
140 Volt Line to VC Output	7
Single and/or Push-Pull Plates to Line	6
Single Plate to Single Grid	7
Single Plate to Push-Pull Grids	7-9
Single Plate to VC Output	5
Splatter Suppressor Filter	10
Tone Control Unit	13
Transistor Audios	10-11-12
Universal Output	5

POWER TRANSFORMERS

Automation Control Transformers	22
Autotransformers	21-22
Auto Radio Vibrator	20-21
Bias Supply	19
Cathode Ray Tube Power	21
Combination Plate and Filament Supply	14-15
Condenser Tester	21

POWER TRANSFORMERS (Continued)

Filament Transformers, Multiple Secondary	17
Filament Transformers, Single Secondary	16-17
Isolation Testing Transformer	22
Isolation Transformers	22
Line Adjusting Autotransformers	22
Photoflash Transformers	21
Plate Transformers	18
"8400 series" Power	14-15
Selenium and Silicon Rectifier	16
Speaker Field Supply	21
Step-Down Isolation	22
Step-Up/Step-Down Autotransformers	21
Straight Isolation	22
Television Booster	29
Testing Autotransformer	22
Transistor Inverter and Power	10-12
Trigger Coil, Photoflash	21
Tube Checker Multi-Tapped Filament	17
Vibrator Transformers	20-21

CHOKES

Smoothing Chokes	19-20
Swinging Chokes	19
High Current Chokes	16

TRANSISTOR TRANSFORMERS

Audio	10-11-12
Choke	12
Modulation	10
Inverter	10
Power	12
Auto Radio	12


MISCELLANEOUS

Output Transformer Chart	4
Stancor-Williamson Amplifier	13
Flyback Types	25
Exact Replacement Flyback and Yoke Chart	30
List Prices	31
Sales Representatives	Back Cover

OUTPUT TRANSFORMER CHART

A simplified selection of the proper transformer for use as a replacement in radio receivers or in the construction of audio amplifiers. To use this chart, check the first column for the tube being used, then read across for the applicable operating characteristics and correct Stancor transformer. In most cases, two Stancor part numbers are indicated in order to give a choice of mounting styles.

Tube	Use	Class	Watts	Load Res. in Ohms	Stancor Part No.	Universal Type	Tube	Use	Class	Watts	Load Res. in Ohms	Stancor Part No.	Universal Type	Tube	Use	Class	Watts	Load Res. in Ohms	Stancor Part No.	Universal Type	
1A5-GT	S.	A	.10	25K	A-3327		6E6	P.P.	A	1.6	14K	A-3496	A-3856	33	S.	A	1.4	6K	A-4421	A-3856	
1A5	S.	A	.05	25K	A-3327		6EH5	S.	A	1.4	3K	A-3328	A-3825	35A5	S.	A	1.5	2.5K	A-3332	A-3856	
1A6	S.	A	0.035	12K	A-3879	A-3822			P.P.	A	3.8	6K	A-3822		S.	A	3	5K	A-3877	A-3849	
1B8-GT	S.	A	.21	14K	A-3881	A-3848	6F6 (GT)	S.	A	4.8	7K	A-3878	A-3822	35B5	S.	A	1.5	2.5K	A-3332	A-3856	
1C5-GT	S.	A	.24	8K	A-3329	A-3848			P.P.	AB	18.5	10K	A-3311	A-3870	35C5	S.	A	1.5	2.5K	A-3332	A-3849
1D8-GT	S.	A	.20	12K	A-3879	A-3822	6G6-G	S.	A	1.1	10K	A-3879	A-3822	35DZ8	S.	A	2.0	2.5K	A-3332	A-3825	
1E7-G (GT)	S.	A	.29	16K	A-3881	A-3848	6K6-GT	S.	A	4.5	9K	A-3879	A-3822	35L6-GT	S.	A	1.5	2.5K	A-3332	A-3856	
	P.P.	A	.575	24K	A-3857			P.P.	A	10.5	12K	A-2312	A-3880		S.	A	3	5K	A-3877	A-3849	
1F4	S.	A	.31	16K	A-3881	A-3848	6L6 (GT) (GA)	S.	A	6.5	2.5K	A-3876	A-3825	38	S.	A	2.5	10K	A-3879	A-3849	
1F5-G	S.	A	.31	16K	A-3881	A-3848			S.	10.8	4.2K	A-2203	A-3849	41	S.	A	4.5	9K	A-3879	A-3822	
1G5-G	S.	A	.55	9K	A-3879	A-3822			P.P.	A	17.5	5K	A-3872	A-3830	42	P.P.	A	18.5	10K	A-3311	A-3830
1G6-GT	P.P.	B	.675	12K	A-3831	A-3856			P.P.	AB1	26.5	6.6K	A-3801	A-3830	43	S.	A	2.2	5K	A-3877	A-3856
1H4-G (GT)	P.P.	B	2.1	8K	A-3856				P.P.	AB1	18	3.8K	A-3802	A-3830	45	S.	A	2	4.6K	A-3877	A-3849
1J5-G	S.	A	.45	13.5K	A-3881	A-3848			P.P.	AB2	31	6K	A-3307			P.P.	AB2	18	3.2K	A-3301	A-3830
1J6-G (GT)	P.P.	B	2.1	10K	A-3831	A-3856	6M5	S.	A	3.9	7K	A-3878	A-3824	46	P.P.	B	20.0	5.8K	A-3307	A-3830	
(GX)	P.P.	B	2.1	10K	A-3831	A-3856			P.P.	AB1	9.4	7K	A-3801	A-3880	47	S.	A	2.7	7K	A-3877	A-3849
1LA4	S.	A	.1	25K	A-3327		6N6-G	S.	A	4	7K	A-3878	A-3824	48	S.	A	2.5	1.5K	A-3332	A-3849	
1LB4	S.	A	.2	12K	A-3879	A-3822	6N7	P.P.	B	10	8K	A-3880		49	S.	A	0.17	11K	TA-33		
1N6-G (GT)	S.	A	.1	25K	A-3327		6R8	S.	A	0.3	10K	A-3879	A-3856	50	S.	A	4.6	4.35K	A-3877	A-3825	
1Q5-GT	S.	A	.27	8K	A-3329	A-3848	6SR7	S.	A	0.3	10K	A-3879	A-3856	50A5	S.	A	2.1	2K	A-2203	A-3856	
1S4	S.	A	.27	8K	A-3329	A-3848	6U6-GT	S.	A	5.5	3K	A-3849			S.	A	3.8	4K	A-2203	A-3825	
1T5-GT	S.	A	.17	14K	A-3881	A-3848	6V5-GT	S.	A	4.5	5K	A-3877	A-3824	50B5	S.	A	1.9	2.5K	A-3332	A-3825	
1V5	S.	A	.05	25K	A-3327			P.P.	AB1	10	10K	A-3311	A-3880	50B5K5	S.	A	3.5	6.5K	A-3878	A-3856	
1W4	S.	A	.2	12K	A-3879	A-3822		P.P.	AB1	10	10K	A-3311	A-3880	50C5	S.	A	1.9	2.5K	A-3332	A-3825	
2A3	S.	A	3.5	2.5K	A-3876	A-3825	6V6 (GT)	S.	A	5.5	5K	A-3877	A-3823	50C6-G	S.	A	3.6	2K	A-3876	A-3825	
	P.P.	AB1	15	3K	A-3301	A-3830		P.P.	AB1	10	10K	A-3311	A-3880	50CA5	S.	A	1.1	3.5K	A-3328	A-3825	
2A5	S.	A	4.8	7K	A-3878	A-3850	6V7-G	S.	A	0.35	20K	A-3327		50EH5	S.	A	1.4	3K	A-3328	A-3825	
	P.P.	AB2	18.5	10K	A-3311	A-3830	6W6-GT	S.	A	3.8	5K	A-3877	A-3849		P.P.	A	3.8	6K	A-3876	A-3822	
2E24	S.	A	3.9	6K	A-3878	A-3848	6V6-G (GT)	S.	A	6.0	2.6K	A-3876	A-3825	50L6-GT	S.	A	2.1	2K	A-3876	A-3822	
2E26	S.	A	4.0	5.5K	A-3877	A-3849	6V7-G	P.P.	B	8.0	14K	A-2312	A-3823		S.	A	3.8	4K	A-2203	A-3825	
2E30	S.	A	4.5	4.5K	A-3877	A-3849	6Z7-G	P.P.	B	4.2	12K	A-3831	A-3823	55	S.	A	0.35	20K	A-3327		
3A4	S.	A	.7	8K	A-8114	A-3822	7A5	S.	A	1.5	2.5K	A-3332	A-3849	59	S.	A	3.0	6K	A-2313	A-3849	
3B5-GT	S.	A	2	5K	A-3878	A-3856	7B5	S.	A	4.5	9K	A-3879	A-3822	70A7-GT	S.	A	1.5	2.5K	A-3332	A-3825	
3BT/1291	P.P.	AB2	1.5	16K	A-2312	A-3880	7C5	P.P.	AB2	19	10K	A-2312	A-3880	70L7-GT	S.	A	1.8	2K	A-3332	A-3825	
3C5-GT	S.	A	2	8K	A-3329	A-3848		P.P.	A	5.5	8.5K	A-3879	A-3822	71A	S.	A	0.79	4.8K	A-3877	A-3856	
	S.	A	26	10K	A-3879	A-3848	8BQ5	P.P.	A	8	10K	A-3335	A-3823	79	P.P.	B	8.0	14K	A-2312	A-3880	
3D6	S.	A	6	14K	A-3881	A-3848		P.P.	AB1	11.0	8K	A-3335	A-3849	85	S.	A	0.35	20K	A-3327		
3E5	S.	A	25	8K	A-3329	A-3848	9DZ8	S.	A	2.0	2.5K	A-3332	A-3825	89	S.	A	3.4	6.75K	A-3878	A-3822	
3LE4	S.	A	1.325	6K	A-3878	A-3848	10	S.	A	1.6	10.2K	A-3879	A-3856	112A	S.	A	0.285	10.65K	A-3879	A-3822	
3LF4	S.	A	.4	8K	A-3329	A-3848	11C5	S.	A	1.5	2.5K	A-3332	A-3825	117L7/M7-GT	S.	A	.85	4K	A-2203	A-3825	
3Q4	S.	A	.27	10K	A-3329	A-3822	12A5	S.	A	3.4	3.3K	A-2203	A-3825	117N7-GT	S.	A	1.2	3K	A-3332	A-3825	
3Q5-GT	S.	A	.4	8K	A-3329	A-3822	12A6 (GT)	S.	A	3.4	7.5K	A-8114	A-3822	117P7-GT	S.	A	.85	4K	A-2203	A-3825	
3S4	S.	A	.18	5K	A-3877	A-3856	12A7	S.	A	.55	13.5K	A-3881	A-3848	1631	P.P.	AB1	26.5	6.6K	A-3801		
	S.	A	27	8K	A-3329	A-3848	12AB5	S.	A	4.5	5K	A-3877	A-3823	1632	S.	A	2.1	2K	A-3332	A-3825	
3V4	S.	A	.27	10K	A-3879	A-3822		P.P.	AB1	10.0	10K	A-3335	A-3849	1644	P.P.	A	1.0	10K	A-3831	A-3856	
3W4	S.	A	0.25	11K	A-3879	A-3822	12AL8	S.	A	0.02	8K	TA-9		5640	S.	A	1.25	3K	A-3332	A-3825	
4A6-G	P.P.	B	1.0	8K	A-3877	A-3856	12ALQ5	S.	A	4.5	5K	A-3877	A-3823	5670	P.P.	AB1	1.0	27K	A-3857		
5A05	S.	A	2.0	5.5K	A-3877	A-3849		P.P.	AB1	10.0	10K	A-3335	A-3849	5672	S.	A	.065	20K	A-3327		
5CM6	S.	A	4.5	5K	A-3877	A-3856	12BF6	S.	A	0.3	10K	A-3879	A-3856	5686	S.	A	2.7	9K	A-3879	A-3822	
	P.P.	AB1	10	10K	A-3335	A-3823	12BK5	S.	A	3.5	6.5K	A-3878	A-3849	5812	S.	A	4.3	1.7K	A-3876	A-3825	
5CZ5	P.P.	AB1	21.5	7.5K	A-3879	A-3849	12BU6	S.	A	0.3	10K	A-3879	A-3856	5824	S.	A	4.3	1.7K	A-3876	A-3825	
	P.P.	AB1	5	5K	A-3877	A-3830	12CA5	S.	A	2.3	2.5K	A-3332	A-3825	5871	S.	A	5.5	8.5K	A-3879	A-3822	
5V6 (GT)	P.P.	AB1	10	10K	A-3311	A-3880	12C5	S.	A	1.5	4.5K	A-3877	A-3856	5902	S.	A	1	3K	A-3328	A-3825	
	P.P.	AB1	10	10K	A-3311	A-3880	12CM6	S.	A	2.0	5.5K	A-3877	A-3849	6005	S.	A	2.0	5.5K	A-4431	A-3856	
6A3	P.P.	AB1	15	3K	A-3876	A-3825		S.	A	5.5	8.5K	A-3877	A-3849	6095	P.P.	AB1	10.0	10K	A-3335	A-3849	
	P.P.	AB1	15	3K	A-3301	A-3830	12CS5	S.	A	3.8	4K	A-3877	A-3856	6216	S.	A	3.8	4.5K	A-3877	A-3856	
6A4/LA	S.	A	1.4	8K	A-8114	A-3822	12CU5	S.	A	2.3	2.5K	A-3332	A-3825	6287	S.	A	4.5	6K	A-4431	A-3823	
6A5-G	S.	A	3.75	2.5K	A-3876	A-3825	12DL8	S.	A	0.04	8K	TA-9		6360	P.P.	AB1	9.3	8K	A-3335	A-3849	
6A6	P.P.	B	10	8K	A-3329	A-3822	12DM5	S.	A	1.9	2.5K	A-3332	A-3825	6516	S.	A	1.4	16K	A-3881	A-3856	
6AB8	S.	A	1.4	11K	A-3879		12DU7	S.	A	0.025	2.7K	TA-29		6526	S.	A	0.375	10K	A-3879	A-3856	
6AC5-GT	P.P.	B	8	10K	A-3335	A-3823	12DV8	S.	A	0.005	1.25K	TA-26		6669	S.	A	4.5	5K	A-3877	A-3823	
6AC6-GT	S.	A	3.6	3.5K	A-2203	A-3825	12E05	S.	A	1.5	4.5K	A-3328	A-3825		P.P.	AB1	10.0	10K	A-8093	A-3880	
6AD7-G	S.	A	3.2	7K	A-2313	A-3822	12EH5	S.	A	1.4	3K	A-3328	A-3825	6677	S.	A	2.8	7.5K	A-8114	A-3822	
6AE7-GT	P.P.	A	9.5	10K	A-2312	A-3880		P.P.	AB1	3.8	6K	A-3822		6945	S.	A	0.8	3K	A-3328	A-3825	
6AG6-G	S.	A	3.8	8.4K	A-3329	A-3822	12EM6	S.	A	0.01	3.5K	TA-45		6973	P.P.	AB1	15	5.5K	A-3307	A-3880	
6AG7	S.	A	3	10K	A-3879	A-3822	12J8	S.	A	0.02	2.7K	TA-29			P.P.	AB1	20	7.5K	A-3885	A-3830	
6AH5-G	S.	A	10.8	4.2K	A-3337	A-3849	12K5	S.	A	0.04	8K	TA-25			S.	A	3.0	5K	A-3877	A-3856	
6AJ5	P.P.	AB1	1.0	28K	A-3857		12L6-GT	S.	A	3.8	4K	A-3877	A-3856								
6AK6	S.	A	1.1	10K	A-3879	A-3822	12L8-GT	S.	A	1.0	10K	A-3879	A-3848								
6AK7	S.	A	3	10K	A-3879	A-3822	12V6-GT	S.	A	4.5	5K	A-3877	A-3823								
6AL6-G	S.	A	6.5	2.5K	A-3876	A-3825		P.P.	AB1	10.0	10K	A-8093	A-3880								
6AM5	S.	A	1.4	16K	A-3881	A-3848	12W6-GT	S.	A	3.8	4K	A-3877	A-3856								
	P.P.	AB1	4.8	20K	A-3857	A-3856	14A5	S.	A	2.8	7.5K	A-8114	A-3822								
6AN5																					

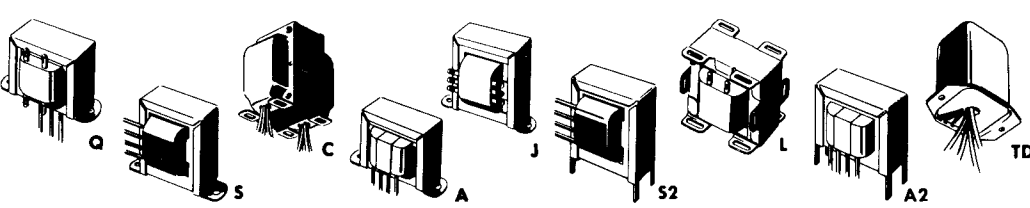

audio



UNIVERSAL OUTPUT will match all popular loudspeaker voice coil impedances

	Part No.	Application	Sec. Range in Ohms	Max. Pri. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
a	A-3856	S. or P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	35 ma	4	Q	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3822	S. Plate (7,000 to 10,000 Ω) to V. C.	0.7 to 4	35 ma	4	Q	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3848	S. Plate (7,000 to 16,000 Ω) to V. C.	0.4 to 4	10 ma	5	Q	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3823	S. or P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	40 ma	8	Q	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-3850	S. or P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	40 ma	8	J	2	2 3/8 x 1 1/2	2	0.7
	A-3825	S. Plate (1,500 to 4,500 Ω) to V. C.	0.3 to 4	75 ma	8	Q	2	3 1/4 x 1 3/8	2 13/16	0.9
	A-3824	S. or P. P. Plates (6,000 to 10,000 Ω) to V. C.	0.6 to 4	75 ma	8	Q	2	3 1/4 x 2	2 13/16	1.4
b	A-3849	S. Plate (1,500 to 10,000 Ω) to V. C.	0.02 to 21	55 ma	10	Q	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-3880	P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	40 ma ea. 1/2	15	Q	2 1/4	3 3/4 x 2 1/4	3 3/8	1.7
	A-2855	P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	50 ma ea. 1/2	15	L	2 1/8	2 3/8 x 1 3/4	1 3/8 x 1 1/2	1.0
	A-3890	P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	50 ma ea. 1/2	15	TD	2 11/16	2 3/4 x 2 3/8	2 3/8 x 1 1/2	1.5
	A-3852	P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	40 ma ea. 1/2	18	J	2 3/8	2 3/8 x 2	2 3/8	1.3
	A-3870	P. P. Plates (4,000 to 14,000 Ω) to V. C.	0.05 to 122	50 ma ea. 1/2	18	Q	2	3 1/4 x 2	2 13/16	1.3
	A-3830	P. P. Plates (3,000 to 10,000 Ω) to V. C.	0.04 to 122	60 ma ea. 1/2	20	J	2 11/16	3 3/8 x 2 1/4	2 13/16	1.8

SINGLE PLATE TO VOICE COIL

	Part No.	Application	Max. Pri. D. C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
c	A-3332	2,000 Ω to 3.2 Ω	50 ma	3	A	1 3/8	2 1/8 x 1	1 3/4	0.4
	A-3876	2,000 Ω to 4 Ω	60 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3328	4,000 Ω to 3.5 Ω	10 ma	3	A	1 3/8	2 1/8 x 1	1 3/4	0.4
	A-2203	4,000 Ω to 8 Ω	40 ma	5	A	1 3/8	2 3/8 x 1 3/8	2 3/8	0.7
	A-3877	5,000 Ω to 4 Ω	40 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-8092	5,000 Ω to 3-4 Ω	50 ma	8	A	1 1/2	1 1/2 x 2 7/8	2 3/8	0.5
	A-3337	5,000 Ω to 6-8 Ω	40 ma	10	S	2 3/8	2 13/16 x 1 3/8	2 3/8	1.0
	A-3310	5,000 Ω to 500/15/8/4 Ω	55 ma	20	C	3 3/8	2 3/8 x 2 3/8	2 x 1 11/16	2.5
d	A-4431	6,000 Ω to 3-4 Ω	35 ma	5	A2	1 3/8	1 13/16 x 1 3/8	1 3/8 x 5/8	0.8
	A-3878	7,000 Ω to 4 Ω	30 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-2313	7,000 Ω to 8 Ω	40 ma	10	A	2	3 1/4 x 1 3/4	2 13/16	1.0
	A-8114	7,600 Ω to 3.2 Ω	32 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3329	8,000 Ω to 3.5 Ω	10 ma	3	A	1 3/8	2 1/8 x 1	1 3/4	0.4
	A-3879	10,000 Ω to 4 Ω	30 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3881	15,000 Ω to 4 Ω	10 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3327	25,000 Ω to 4 Ω	5 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4






PUSH-PULL PLATES TO VOICE COIL

	Part No.	Application	Max. Pri. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
e	•A-8098*	2,000 Ω CT to 8/16/32 Ω	140 ma	15	C	3 3/8	2 3/8 x 3 1/4	2 x 2 1/4	3.3
	A-3802	3,800/3,300 Ω CT to 500/250/8/4 Ω	125 ma Per 1/2 Pri.	75	C	4 3/4	4 x 3 3/8	2 13/16 x 3	7.9
	A-8094*	4,000 Ω CT to 8/16/32 Ω	80 ma	7 1/2	A	2 1/2	2 1/4 x 3 3/8	3 1/8	1.5
	A-3851§	4,400 Ω CT to 500/250/15/8/4 Ω	70 ma	30	C	3 3/8	3 x 3 3/8	2 1/4 x 2	3.6
	A-3872	5,000 Ω CT to 15/8/4 Ω	75 ma	18	TD	2 11/16	2 3/4 x 2 3/8	2 3/8 x 1 1/2	1.7
	A-3800	5,000 Ω CT to 500/250/15/8/4 Ω	80 ma	30	C	3 3/8	3 x 3 3/8	2 1/4 x 2	3.7
	A-3307	6,000 Ω CT to 500/15/8/4 Ω	100 ma	30	C	3 3/8	3 x 3 3/8	2 1/4 x 2	3.5
	A-3801	6,600 Ω CT to 500/250/15/8/4 Ω	150 ma	35	C	4	3 1/4 x 3 3/8	2 1/2 x 2 3/8	4.8
	A-4430	9,000 Ω CT to 3.2 Ω	40 ma	5	A2	1 13/16	2 3/8 x 1 3/8	1 13/16 x 1 1/16	1.0
	A-3885	9,000 Ω CT to 500/250/15/8/4 Ω	150 ma	35	C	4	3 1/4 x 3 3/8	2 1/2 x 2 3/8	4.8
	A-4432	10,000 Ω CT to 4 Ω	50 ma	10	S2	2 3/8	2 x 1 3/8	1 1/8 x 5/8	1.0
	A-3304	10,000/7,000 Ω CT to 500/15/8/4 Ω	60 ma	25	C	3 3/8	2 3/8 x 2 3/8	2 x 1 11/16	2.7
f	A-3311	10,000 Ω CT to 500/15/8/4 Ω	70 ma	25	C	3 3/8	3 x 3 1/8	2 1/4 x 2	3.5
	A-3831	10,000 Ω CT to 8/4/2 Ω	40 ma	5	A	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-8093	10,000 Ω CT to 3-4 Ω	40 ma	10	A	1 1/2	1 1/2 x 2 3/8	2 3/8	0.5
	A-3335	10,000 Ω CT to 6-8/3.2-4 Ω	40 ma	10	S	2 3/8	2 13/16 x 1 3/4	2 3/8	1.0
	A-3839	10,000 Ω CT to 2,000 and 15/8/4 Ω	30 ma	10	TD	2 11/16	2 3/4 x 2 3/8	2 3/8 x 1 1/2	1.3
	A-2312	14,000 Ω CT to 4 Ω	40 ma	10	A	2 3/8	2 13/16 x 1 3/4	2 3/8	1.0
	A-3496	14,000 Ω CT to 4 Ω	25 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	A-3303	14,000 Ω CT to 500/15/8/4 Ω	55 ma	20	C	3 3/8	2 3/8 x 2 3/8	2 x 1 11/16	2.7
	A-3857	25,000 Ω CT to 4 Ω	10 ma	5	A	1 3/8	2 3/8 x 1 3/8	2	0.4

§Unit has a tertiary winding to provide 10% inverse feedback.

*For use in "Twin-Coupled" amplifier.

*New part number.



HUM-REDUCING TRANSFORMERS

	Part No.	Application	Max. Pri. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
a	A-3330	†2,000 Ω to 3.5 Ω	60 ma	5	A	1⅞	2⅞ x 1⅞	2	0.4
	A-3336	#2,500 Ω to 3.5 Ω	50 ma	5	A	1⅞	2⅞ x 1⅞	2	0.4

†Has 4.5% primary tap.

#Has 3% and 6% primary taps.

SINGLE AND/OR PUSH-PULL PLATES TO LINE

	Part No.	Application	Impedance in Ohms	Max. Pri. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
b	A-3841	Single Plate to Line	Pri—7,000/6,000/5,000/4,000/2,500 Sec—500	60 ma	10	J	2⅞	3⅞ x 2¼	2⅞	1.5
	A-3842	P. P. Plates to Line	Pri—14,000/12,000/10,000/8,000 CT Sec—500	55 ma	10	J	2⅞	3⅞ x 2¼	2⅞	1.7
	A-4770	Single Plate to Line	Pri—7,000/6,000/5,000/4,000/2,500 Sec—500	60 ma	20	J	3⅞	3⅞ x 2¼	3⅞	2.4
	A-3250	Single Plate or P. P. Plates to Line	Pri—20,000/10,000/5,000/20,000 CT Sec—500/333/200/125/50	15 ma	5	Q	2	3¼ x 1⅞	2⅞	1.0
	A-3315	Single Plate or P. P. Plates to Line	Pri—20,000/10,000/5,000/20,000 CT Sec—500/333/200/125/50	35 ma	20	D	3⅞	2⅞ x 2⅞	2 x 1⅞	2.7

LINE TO VOICE COIL

	Part No.	Impedance in Ohms	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
c	A-8101	Pri—500 Sec—6-8/3.2	5	Q	1⅞	2⅞ x 1⅞	2	0.4
	A-3883	Pri—500 Sec—15/8/6/4	25	J	2⅞	2⅞ x 1⅞	2⅞	1.1
	A-3882	Pri—500/333/250 Sec—15/8/4	25	D	3⅞	2⅞ x 3½	2 x 1⅞	2.4
	A-3818	Pri—1,500/1,000/500 Sec—15/8/4	25	J	3⅞	3⅞ x 2¼	3⅞	2.2
	A-7947	Pri—2,000/1,500/1,000/500 Sec—6-8/3.2	8	Q	1⅞	2⅞ x 1⅞	2⅞	0.7
	A-7949	Pri—2,000/1,500/1,000/500 Sec—6-8/3.2	12	J	2⅞	2⅞ x 1⅞	2⅞	1.1
	A-3820	Pri—2,000/1,500/1,000/500 Sec—15/8/4	40	D	4⅞	3⅞ x 4½	2¾ x 2⅞	5.0
d	A-8104	Pri—3,000/2,000/1,500/1,000/500 Sec—16/8/4	10	J	2⅞	2⅞ x 1⅞	2⅞	1.5
	A-3838	Pri—500 Sec—250/166/125/100/84	30	BV	3⅞	2½ x 2⅞	2 x 2	2.3
	A-3837#	This auto transformer is designed to operate one or more speakers in series across a 500 ohm line or to match unequal lines. Pri—500/1,000/1,500/2,000/2,500/3,000 Sec—.06 to 8 ohms when primary is 500 ohms, .12 to 16 ohms when primary is 1,000 ohms, etc. This unit is designed to operate one or more speakers in parallel across a 500 ohm line.						1.4

#Line to Line or V.C.

25 VOLT LINE TO VOICE COIL


	Part No.	Power Steps in Watts	Impedance in Ohms	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
e	A-8095	5/2.5/1.25 .62/.31	Pri—125/250/500/1000/2000 Sec—4/8	Q	1⅞	2⅞ x 1⅞	2	0.4
	A-8096	8/4/2/1/0.5	Pri—78/156/312.5/625/1250 Sec—4/8/16	J	2	1⅞ x 2⅞	2	0.65
	A-8097	16/8/4/2/1/0.5	Pri—39/78/156/312.5/625/1250 Sec—4/8/16	J	2¾	2¼ x 3¼	2⅞	1.6
	A-8099	2/1/0.5	Pri—2500/5000/10,000 Sec—4/8	Q	1¼	2⅞ x 1⅞	1¾	0.3

*New part number.


70.7 VOLT LINE TO VOICE COIL

	Part No.	Power Steps in Watts	Impedance in Ohms	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. in Lbs.
f	A-8102	8/4/2/1/0.5	Pri—625/1,250/2,500/5,000/10,000 Sec—4/8/16	J	2	1⅞ x 2⅞	2	0.7
	A-8103	16/8/4/2/1/0.5	Pri—312.5/625/1,250/2,500/5,000/10,000 Sec—4/8/16	J	2¾	2¼ x 3¼	2⅞	1.5
	A-8105	5/2.5/1.25/ .62/.31	Pri—1,000/2,000/4,000/8,000/16,000 Sec—4/8	Q	1⅞	2⅞ x 1⅞	2	0.4
	A-8080	5/4/3/2/1	Pri—1,000/1,250/1,667/2,500/5,000 Sec—8/16	Q	1⅞	2⅞ x 1⅞	2	0.4
	A-8081	10/9/8/7/6	Pri—500/555/625/715/833 Sec—8/16	J	2	2⅞ x 1⅞	2	0.7
	A-8082	15/14/13/ 12/11	Pri—333/357/384/417/455 Sec—8/16	J	2⅞	2⅞ x 1⅞	2⅞	1.2
	A-8109	2/1/0.5	Pri—2,500/5,000/10,000 Sec—4/8	Q	1¼	2⅞ x 1⅞	1¾	0.3


*New Part Number.




S2




C-1



S



TD



VE



audio

140 VOLT LINE TO VOICE COIL

	Part No.	Power Steps In Watts	Impedance in Ohms	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
a	A-8108	5.0/2.5 1.25/0.625	Pri—4,000/8,000/16,000/32,000 Sec—4/8	Q	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{3}{8}$	2	0.4
	A-8106	8/4/2/1	Pri—2,500/5,000/10,000/20,000 Sec—4/8/16	J	2	1 $\frac{5}{8}$ x 2 $\frac{7}{8}$	2	0.7
	A-8107	16/8/4/2/1	Pri—1,250/2,500/5,000/10,000/20,000 Sec—4/8/16	J	2	3 $\frac{1}{8}$ x 2	2 $\frac{13}{16}$	1.8

CRYSTAL RECORDER OUTPUT

	Part No.	Application	Max. Pri. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
b	A-3859	Push-pull 10,000 Ω plates to 70,000 Ω crystal cutter OR 4 Ω voice coil	30 ma ea. $\frac{1}{2}$	5	A	2	3 $\frac{1}{4}$ x 1 $\frac{1}{4}$	2 $\frac{13}{16}$	1.0

MICROPHONE OR LINE TO LINE

	Part No.	Impedance in Ohms	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
c	A-4350#	Pri—500/333/200/125/50, Sec—500/333/200/125/50	10	Q	2	3 $\frac{1}{4}$ x 1 $\frac{1}{4}$	2 $\frac{13}{16}$	1.0
	A-4407#†	Pri—500/333/200/125/50, Sec—500/333/200/125/50	20	D	3 $\frac{1}{8}$	2 $\frac{5}{8}$ x 3 $\frac{1}{4}$	2 x 1 $\frac{11}{16}$	2.4

†Has a static shield between primary and secondary windings.

#Has a dual primary—when properly connected the 500 and 200 ohm sections are center tapped.

MICROPHONE, PICKUP OR LINE TO GRID

	Part No.	Application	Impedance in Ohms	Turns Ratio	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
d	A-4705	S. B. Mic to S. Grid	Pri—200/70 Sec—80,000	1:20	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{3}{8}$	2	0.4
	A-4706	S. B. Mic to S. Grid	Pri—100 Sec—60,000	1:24.5	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	2	0.5
	A-4708	D. B. Mic to S. Grid	Pri—200 CT Sec—57,000	1:17	J	2	2 $\frac{3}{8}$ x 1 $\frac{5}{8}$	2	0.7
	A-4742	S. B. Mic to P. P. Grids	Pri—100 Sec—400,000 CT	1:64	S	2 $\frac{3}{8}$	2 $\frac{7}{8}$ x 1 $\frac{1}{4}$	2 $\frac{3}{8}$	1.2
e	A-4747	S. B. Mic or Low Imp. Line to S. Grid	Pri—70 Sec—1,300,000	1:137	VE	1 $\frac{7}{8}$	1 $\frac{1}{8}$ x 1 $\frac{1}{4}$	1 $\frac{1}{2}$	0.5
	A-4351#	Mic or Line to S. Grid	Pri—500/333/200/125/50 Sec—89,000	1:13.3	TD	2 $\frac{11}{16}$	2 $\frac{3}{4}$ x 2 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	1.4
	A-4352#	Mic or Line to P. P. Grids	Pri—500/333/200/125/50 Sec—89,000 CT	1:13.3	Q	2	3 $\frac{1}{4}$ x 1 $\frac{3}{4}$	2 $\frac{13}{16}$	1.0
	A-4709	Dynamic Mic or Pickup to S. Grid	Pri—30/15/8/4 Sec. 106,000	1:60	TD	2 $\frac{11}{16}$	2 $\frac{3}{4}$ x 2 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	1.7
	•A-4778	Line to Grid	Pri—600/500 CT Sec—240,000	1:20	C1	2 $\frac{1}{4}$	2 $\frac{7}{8}$ x 1 $\frac{1}{8}$	2 $\frac{3}{8}$	1.0
	•A-4779	Line to S. or P. P. Grids	Pri—600/500 CT Sec—60,000 CT	1:10	A	1 $\frac{3}{8}$	2 $\frac{1}{2}$ x 1 $\frac{3}{8}$	2	0.5
	•A-4780	Line to P. P. Grids	Pri—600/500 CT Sec. 240,000 CT	1:20	VE	2	3 $\frac{1}{4}$ x 1 $\frac{1}{4}$	2 $\frac{13}{16}$	1.0

#Has a dual primary—when properly connected the 500 and 200 ohm sections are center tapped.

•New Part Number.

SINGLE PLATE TO SINGLE GRID

For 7,000-20,000 Ohm Plate Impedances

	Part No.	Turns Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
f	A-53	1:3	10 ma	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	2	0.5

SINGLE PLATE TO PUSH-PULL GRIDS


For 7,000-15,000 Ohm Plate Impedances

	Part No.	Turns Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
g	A-52-C	1:2	10 ma	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{3}{8}$	2	0.4
	A-62-C	1:2	10 ma	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	2 $\frac{3}{8}$	0.7
	A-4745	1:2	10 ma	TD	2 $\frac{11}{16}$	2 $\frac{3}{4}$ x 2 $\frac{1}{4}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	1.7
	A-53-C	1:3	10 ma	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{3}{8}$	2	0.5
	A-63-C	1:3	10 ma	A	1 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	2 $\frac{3}{8}$	0.7
	A-73-C	1:3	10 ma	A	2	3 $\frac{1}{4}$ x 1 $\frac{3}{4}$	2 $\frac{13}{16}$	1.0
	A-4719	1:3	10 ma	TD	2 $\frac{11}{16}$	2 $\frac{3}{4}$ x 2 $\frac{1}{4}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	1.7
	A-64-C	1:4	10 ma	S	2	2 $\frac{3}{8}$ x 1 $\frac{3}{4}$	2	0.7
	A-4420	18,000 Ω Plate to P. P. Grids Exact replacement for Delco 6061		S2	1 $\frac{3}{8}$	1 $\frac{1}{8}$ x 1 $\frac{1}{4}$	1 $\frac{1}{8}$ x $\frac{3}{8}$	0.5


Recommended for use in super-regenerative circuits. Has a static shield between pri. and sec. windings.




audio




C



Q



VE



A

MULTI-PURPOSE INTERSTAGE—SPLIT SECONDARIES

May be used as single plate to single grid, single plate to push-pull grid, or push-pull plate to push-pull grid interstage transformers. Overall ratios are 1:3, but primaries are center-tapped

and secondaries have split windings, providing ratios of 1:1, 3:1 and 6:1 in either step-up or step-down applications. For 7,000 to 15,000 ohm plate impedances.

a	Part No.	Turns Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
	A-4774	1:3	10 ma	S	2 ³ / ₁₆	2 ⁷ / ₁₆ x 1 ³ / ₄	2 ³ / ₁₆	1.2
	A-4773	1:3	10 ma	TD	2 ¹ / ₁₆	2 ³ / ₄ x 2 ¹ / ₄	2 ³ / ₈ x 1 ¹ / ₂	1.7

PUSH-PULL PLATES TO PUSH-PULL GRIDS

For 7,000-15,000 Ohm Plate Impedances

b	Part No.	Turns Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
	A-4711	1:1	10 ma	A	1 ³ / ₈	2 ⁷ / ₈ x 1 ¹ / ₂	2 ³ / ₈	0.7

PUSH-PULL PLATES TO PARALLEL OR PUSH-PULL GRIDS

For 7,000-20,000 Ohm Plate Impedances

c	Part No.	Turns Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
	A-4208	1:1.4	15 ma	C	3 ³ / ₁₆	2 ⁵ / ₈ x 2 ⁵ / ₈	2 x 1 ¹ / ₁₆	2.5

AUDIO CHOKES

Audio reactors are rated at 2 volts, 200 cycles, with maximum D.C. in windings. Tolerance of

minus 15%, plus 50% is maintained on all inductance ratings.

d	Part No.	Rated Inductance	D.C. Res. in Ohms	Test Volts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
	C-1003	16 hy at 50 ma	580	1500	A	2	3 ¹ / ₄ x 1 ³ / ₄	2 ¹³ / ₁₆	1.1
	C-2301	135 hy at 10 ma	6500	1500	TD	2 ¹ / ₁₆	2 ³ / ₄ x 2 ³ / ₁₆	2 ³ / ₈ x 1 ¹ / ₂	1.7
	•C-2345	350 hy at 5 ma	5600	2500	A	2	3 ¹ / ₄ x 1 ³ / ₄	2 ¹³ / ₁₆	1.5
	•C-2346	35 hy at 15 ma	1800	2500	A	1 ³ / ₈	2 ¹ / ₂ x 1 ¹ / ₄	2	0.5

•New Part Number.

INTERCOMMUNICATOR AND TRANSCEIVER

	Part No.	Application	Impedance In Ohms	Max. Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
e	A-4744	Intercom. input	Pri—4 Sec—25,000	—	VE	1 ³ / ₈	2 ³ / ₈ x 1 ¹ / ₂	2	0.5
	A-4748	Intercom. input	Pri—45 or 50 Sec—50,000	—	A	1 ³ / ₁₆	2 ³ / ₁₆ x 1 ¹ / ₄	1 ³ / ₄	0.4
	A-8090	Line to Voice Coil	Pri—45-50 Sec—3-4, 6-8	3	Q	1 ³ / ₈	2 ³ / ₈ x 1 ¹ / ₂	2	0.5
	A-8091	Line to Voice Coil	Pri—45-50 Sec—3-4, 6-8	8	Q	1 ³ / ₈	2 ³ / ₈ x 1 ¹ / ₈	2 ³ / ₈	0.7
	A-3817*	Transceiver Modulation & Output (autoformer)	Pri —5,000 @ 50 ma DC Sec—6,750 @ 50 ma DC	10	A	1 ¹⁵ / ₁₆	1 ¹ / ₂ x 2 ³ / ₈	2	0.7
	A-3833	Transceiver input mic and plate to grid	Pri—200 and 5,000 Sec—60,000	5	A	1 ³ / ₈	2 ³ / ₈ x 1 ¹ / ₂	2 ³ / ₈	0.7
	A-3836	Transceiver output. Plate to low or high impedance phones	Pri—10,000 Sec—50 and 2,000	5	A	1 ³ / ₈	2 ³ / ₈ x 1 ¹ / ₂	2 ³ / ₈	0.7
	A-4749	Telephone Patch Circuit	Pri—10,000 Sec—500	—	TD	1 ¹⁵ / ₁₆	1 ¹ / ₂ x 2 ¹ / ₄	1 ¹⁵ / ₁₆	1.0

*Used in Citizens Band Transceiver, write for bulletin showing circuit, parts list, construction information, etc.

DRIVER TRANSFORMERS

HANDY METHOD FOR APPROXIMATING THE PRIMARY TO SECONDARY RATIO REQUIRED OF A DRIVER TRANSFORMER IN CLASS B OR AB₂ SERVICE





$$\text{Transformer ratio, primary: } \frac{1}{2} \text{ secondary} = \frac{\sqrt{PZ_L}}{0.35E_s}$$

where: P = Driving power in watts required for tubes to be driven.

Z_L = Plate load impedance of driver tube(s) selected.

E_s = Peak grid-to-grid signal voltage required for tubes to be driven.

Factor values for this formula are data commonly found in tube manuals. Select driver tubes capable under typical operation of delivering 1.5 times the grid driving power requirements of the stage to be driven. Pentode or tetrode drivers should be operated with inverse feedback.

**D****TD****CD****S****audio****SINGLE PLATE TO PUSH-PULL GRIDS**

	Part No.	Pri. Impedance in Ohms	Pri./½ Sec. Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
a	A-4713	10,000	2:1	30 ma	A	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-4752	10,000	2/1.5/1:1	40 ma	A	2	3 1/4 x 1 3/4	2 13/16	1.2
	A-4722	10,000	2:1	30 ma	TD	2 11/16	2 3/4 x 2 3/16	2 3/8 x 1 1/2	1.7
	A-4292	10,000	2.5:1	20 ma	A	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-4723	10,000	3:1	30 ma	A	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-4210	1,500 to 5,000	3:1	40 ma	C	3 3/8	2 3/8 x 2 3/8	2 x 1 11/16	2.4
	A-4702	1,500 to 5,000	5:1	80 ma	C	3 3/8	2 3/8 x 2 3/8	2 x 1 11/16	2.5

PUSH-PULL PLATES TO PUSH-PULL GRIDS

	Part No.	Pri. Imp. (P-P) in Ohms	Pri./½ Sec. Ratio	Max. Pri. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
b	A-4208#	10,000 to 30,000	2.8:1	15 ma	C	3 3/8	2 5/8 x 2 3/8	2 x 1 11/16	2.5
	A-4701#	20,000	3:1	25 ma	C	3 3/8	2 5/8 x 2 3/8	2 x 1 11/16	2.7
	A-4212	1,500 to 5,000	3.2:1	50 ma	C	3 3/8	2 5/8 x 2 3/8	2 x 1 11/16	2.5
	A-4703#	3,000 to 10,000	5:1	95 ma	C	3 3/8	3 x 3 3/8	2 1/2 x 2	3.7

#These units have split secondaries for individual bias adjustment and/or use of inverse feedback.

"POLY-PEDANCE" DRIVER**Multi-Tapped Universal Units Offering Optimum Ratio Selection**

	Part No.	Application and Ratio Pri./½ Sec.	Max. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
c	A-4761	Driver to Class "B" Grids 1.25:1/ 1.4:1/ 1.6:1/ 1.8:1/ 2:1/ 2.2:1/ 2.4:1	Pri—150 ma Sec—100 ma	15	CD	3 3/8	2 5/8 x 3 5/8	2 x 2 3/8	3.4
	A-4762	Driver to Class "B" Grids 2.6:1/ 3:1/ 3.2:1/ 3.4:1/ 4:1/ 4.5:1/ 5:1	Pri—150 ma Sec—180 ma	15	CD	3 3/8	2 5/8 x 3 5/8	2 x 1 11/16	2.7
	A-4763	Driver to Class "B" Grids 1.25:1/ 1.5:1/ 1.75:1/ 2:1/ 2.25:1/ 3.2:1	Pri—225 ma Sec—280 ma	30	CD	3 5/8	3 x 4	2 1/4 x 2 3/8	4.3

"POLY-PEDANCE" LINE DRIVER**Multi-Tapped Unit Offering Optimum Ratio Selection From a 500 Ohm Line Input**

	Part No.	Application and Ratio Pri. ½ Sec.	Max. D.C.	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
d	A-4765	Line to Push Pull Grid 1:0.75/ 1:0.85/ 1:1/ 1:1.25/ 1:1.45/ 1:1.75/ 1:2/ 1:2.25/ 1:2.5/ 1:2.75/ 1:3.15	Pri—180 ma Sec—100 ma	15	CD	3 3/8	2 5/8 x 3 3/8	2 x 1 11/16	3.2

PLATE MODULATION

	Part No.	Impedance in Ohms	Max. Ma. DC/Tube Pri. Sec.	Typical Output Tubes	Class	Audio Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
e	A-3812	Pri—10,000 CT Sec—4,000	32 50	Sgl.—37, 38, 41, 1G5, 6K6 Sgl.—19, 1G6, 1J6, 6E6, 6G6, 6Z7 P.P.—30, 49, 1H4	A B	5	A	1 3/8	2 3/8 x 1 1/2	2 3/8	0.7
	A-3871	Pri—4,500 Sec—8,500	60 50	Sgl.—6L6, HY69 #Sgl.—6B5, 6F6, 6N6	B A A	10	TD	2 11/16	2 3/4 x 2 3/16	2 3/8 x 1 1/2	1.4
	A-3845	Pri—10,000 CT Sec—8,000/6,500/ 5,000/3,000	100 100	Sgl.—53, 79, 6A6, 6N7, 6Y7 P.P.—42, 2A5, 6F6, 6V6	B AB2	25	C	3 3/8	2 5/8 x 2 3/4	2 x 1 13/16	2.8
	A-3808	Pri—3,800/3,300 CT Sec—10,000/7,500/ 5,000/4,000	260 170	P.P.—6L6, 807, HY61, RK41 P.P. Par—6L6	AB2 AB1	60	D	4 3/4	4 x 4 7/8	3 x 2 13/16	7.7
	A-3829	Pri—9,000/6,900 CT Sec—6,250/5,000/ 4,000/3,300	250 300	P.P.—RK12, HY25, 35T, HY40Z, T40, TZ40, 100TL, HK354, 756, 809, 830B	B	175	D	4 3/4	4 x 6 1/8	3 x 3 13/16	11.4


#Secondary used as primary




audio transistor




C



FS



TD



A

"POLY-PEDANCE" MODULATION

MULTI-TAPPED UNITS TO PROPERLY MATCH THE OUTPUT OF THE MODULATOR STAGE TO THE MODULATED LOAD. WILL MATCH ALL COMMON IMPEDANCES OF CLASS "B" MODULATOR (2,000 to 20,000 OHMS) TO CLASS "C" LOAD IMPEDANCES OF 2,000 TO 20,000 OHMS.

The number of excellent transmitting tubes available is constantly increasing. R.F. applications, too, have increased and it is sometimes difficult to obtain the correct modulation transformer suitable for matching some given modulator or R.F. load. These units give an almost unlimited range in power and impedance ratings to assure a correct impedance match in all cases.

	Part No.	Max. Watts	Max. D.C.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
a	A-3891	15	Pri—100 ma Sec—100 ma	D	3 $\frac{1}{8}$	2 $\frac{1}{2}$ x 2 $\frac{1}{8}$	2 x 1 $\frac{1}{16}$	2.5
	A-3892	30	Pri—150 ma Sec—150 ma	D	4	3 $\frac{1}{4}$ x 3 $\frac{1}{8}$	2 $\frac{1}{2}$ x 2 $\frac{1}{8}$	4.3
	A-3893	60	Pri—180 ma Sec—180 ma	D	4	3 $\frac{1}{4}$ x 4 $\frac{1}{8}$	2 $\frac{1}{2}$ x 2 $\frac{1}{16}$	6.2
	A-3894	125	Pri—225 ma Sec—225 ma	D	4 $\frac{1}{4}$	4 x 4 $\frac{1}{8}$	3 x 3 $\frac{1}{8}$	9.4
	A-3898	300	Pri—260 ma Sec—260 ma	FS	8 $\frac{1}{8}$	5 $\frac{1}{4}$ x 7 $\frac{1}{8}$	4 $\frac{1}{8}$ x 4 $\frac{1}{4}$	37.9
	A-3899	600	Pri—500 ma Sec—500 ma	FS	9 $\frac{1}{8}$	7 $\frac{1}{4}$ x 10 $\frac{1}{4}$	6 x 5 $\frac{1}{4}$	70.0

AUDIO FILTERS

Splatter Suppressor Filter

For Use Between the Modulator and RF Amplifier

b	Part No.	Application	Range of Inductance In Henries†	Max. D.C. In Ma.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
	C-2317	Splatter Suppressor Filter	0.048 to 0.9	300	BH	2 $\frac{1}{8}$	3 x 3	2 $\frac{1}{2}$ x 2	2.3

†Taps provided for obtaining various amounts of inductance.

Band Pass and Low Pass Filters

For Use In Speech Amplifiers

	Part No.	Application	Input Impedance In Ohms	Output Impedance In Ohms	Max. Operating Level	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
c	C-2340	Band Pass Filter 200 to 3,000 C.P.S.	10,000	500 or 100,000	10.0V RMS Across Output	TD	2 $\frac{1}{16}$	2 $\frac{3}{4}$ x 2 $\frac{3}{8}$	2 $\frac{3}{8}$ x 1 $\frac{1}{2}$	0.6
	C-2341	Low Pass Filter 3000 C.P.S. Cutoff	100,000	100,000	1.5V RMS Across Output	TD	2	2 $\frac{1}{2}$ x 1 $\frac{15}{16}$	2 $\frac{1}{8}$	0.5

TRANSFORMERS FOR TRANSISTOR APPLICATIONS

*Transistor transformers for a 30 watt transistor mobile modulator *

	Part No.	Application	Imp. in Ohms Pri.	Sec.	Max. Pri. D.C. Ma.	Power in Watts	Height Inches	Base Area Inches	Mtg. Ctrs., In.	Mtg. Type	Shipping Weight
d	TA-15*	Input	50 to 100	10	50	5MW	1 $\frac{3}{16}$	1 $\frac{1}{16}$ x 1 $\frac{1}{16}$	1 $\frac{3}{16}$	A	5 $\frac{1}{2}$ oz.
	TA-16*	Driver	20	36 C.T.	400	1W	1 $\frac{3}{16}$	2 $\frac{1}{16}$ x 1 $\frac{1}{8}$	1 $\frac{3}{4}$	A	2 oz.
	TA-17*	Modulation†	8 C.T.	7500/5000 @ 120 maDC	—	35	3 $\frac{1}{8}$	3 x 2 $\frac{1}{2}$	1 $\frac{15}{16}$ x 2	C	3 lbs.

*See bulletin 545 for circuit of a typical class B modulator stage.

†For use with P. P. 2N278 transistors operating from 12 V. DC Source in Class "B."

TRANSISTOR INVERTER TRANSFORMER


For Mobile and Fixed Power Supply

	Part No.	Primaries	Secondaries	RMS V. Test	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
e	P-8195†	12 Volts D.C. or 117 Volts A.C. 60 cycles	280 Volts D.C. @ 150 ma.* and 12.6 Volts A.C. @ 3 Amps. (with 117 Volt Pri. only)	1500	C	3 $\frac{1}{8}$	3 $\frac{3}{8}$ x 3 $\frac{1}{8}$	2 $\frac{1}{2}$ x 2 $\frac{1}{16}$	6.0


†See Bulletin 596 for Circuit and Parts List.

*CCS—150 ma., ICAS—250 ma.


•New Part Number.



BH




D



J



TS


















S



transistor

TRANSISTOR AUDIO TRANSFORMER FREQUENCY RESPONSE CURVES

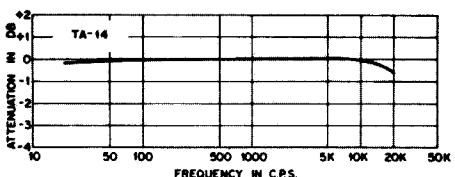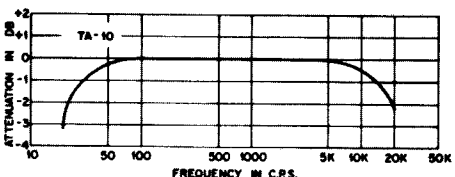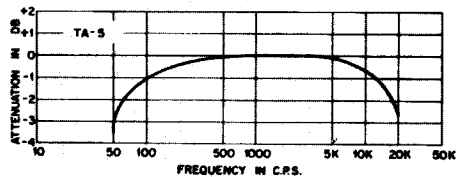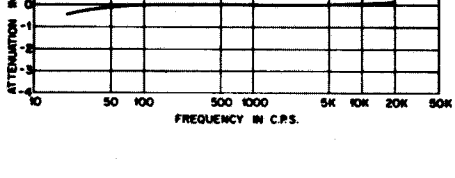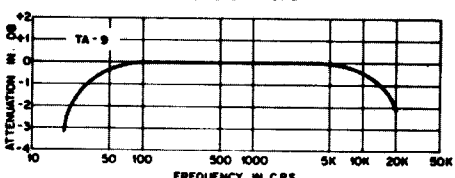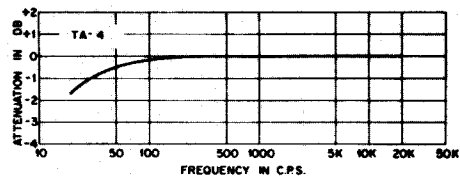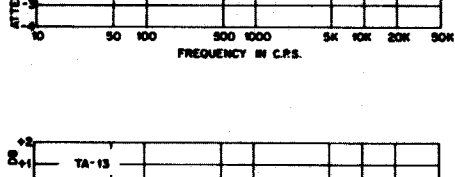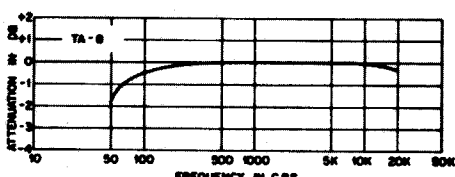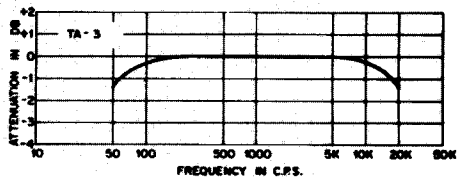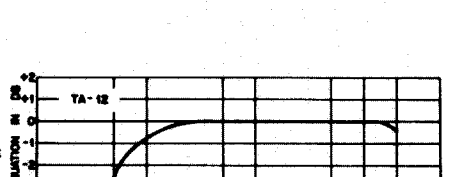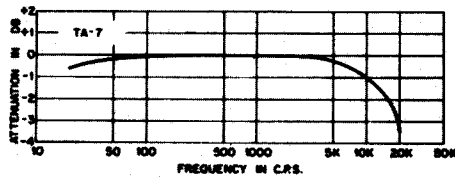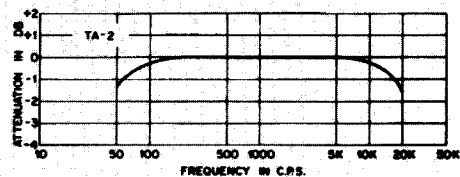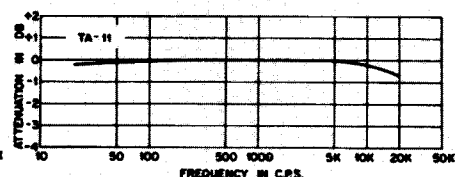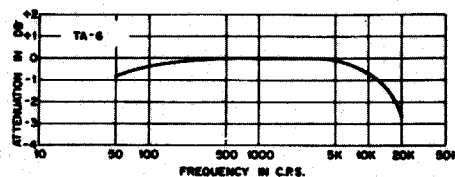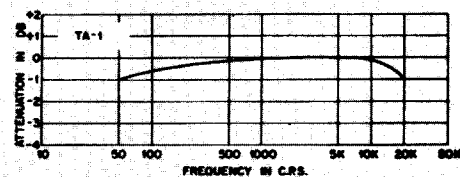

TRANSFORMERS FOR TRANSISTOR APPLICATIONS

Audio


	Part No.	Applica- tion	Imp. in Ohms		Max. Pri. DCMA	D.C. Res. in Ohms		Power in Watts	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt.
			Pri.	Sec.		Pri.	Sec.						
a	TA-1	Input	600 CT	10	20	42	.8	.05	1 ³ / ₁₆	1 ¹ / ₁₆ x 1 ¹ / ₁₆	1 ¹ / ₁₆	A	1 oz.
	TA-2	Interstage	100 CT	10 CT	100	4.3	.8	.25	1 ¹ / ₁₆	2 ¹ / ₈ x 1 ³ / ₈	1 ¹ / ₁₆	A	3 oz.
	TA-3	Interstage	100	1000 CT	100	5.8	.45	.25	1 ³ / ₈	2 ⁷ / ₁₆ x 1 ³ / ₈	2	A	3 oz.
	TA-4	Interstage	500 CT	5000 CT	12	37	250	.03	1 ³ / ₈	2 ⁷ / ₁₆ x 1 ³ / ₈	2	A	3 oz.
	TA-5	Driver	1000	200 CT	10	400	115	.05	5 ⁸ / ₁₆	1 ¹ / ₄ x 1 ¹ / ₂	1 ¹ / ₁₆	A	2 oz.
b	TA-6	Driver	2000	200 CT	5	720	115	.05	5 ⁸ / ₁₆	1 ¹ / ₄ x 1 ¹ / ₂	1 ¹ / ₁₆	A	2 oz.
	TA-7	Driver	100	100 CT	100	12	12	.5	1 ³ / ₈	2 x 1 ³ / ₈	2 ³ / ₈	A	5 oz.
	TA-8	Output	9800	15	2	640	2	.05	1 ³ / ₈	2 ⁷ / ₁₆ x 1 ³ / ₈	2	A	2 oz.
	TA-9	Output	1000	4/8/16	10	180	3.5	.2	3 ⁴ / ₁₆	1 ¹ / ₁₆ x 3 ⁴ / ₁₆	1 ³ / ₈	A	1 oz.
	TA-10	Output	2000 CT	4/8/16	—	250	4	.2	3 ⁴ / ₁₆	1 ¹ / ₁₆ x 3 ⁴ / ₁₆	1 ³ / ₈	A	1 oz.
c	TA-11	Output	48 CT	8/16	275	5	1.5	5	2	3 ⁵ / ₁₆ x 1 ³ / ₄	2 ⁷ / ₈	A	1 lb.
	TA-12	Output	20 CT	8	500	.55	.35	10	1 ³ / ₈	1 ⁷ / ₁₆ x 1 ¹ / ₂	2	A	4 oz.
	TA-13	Driver	200 CT	400 CT	10	4	7	.6	3	2 ¹ / ₁₆ x 2 ⁵ / ₈	2 ³ / ₈ x 1 ¹ / ₂	TD	1 ¹ / ₂ lb.
	TA-14	Output	24 CT	16/4 CT†	200	2	0.6 ea.	10	4 ¹ / ₄	4 ³ / ₈ x 3 ³ / ₁₆	3 ³ / ₈ x 2 ³ / ₄	TD	6 ¹ / ₄ lb.
d	•TA-56	Output	48 CT	3.2/8/16	550	3.6	1.4	10	2 ³ / ₁₆	2 ⁷ / ₈ x 2	2 ³ / ₈	J	1 lb.
	•TA-57	Output	100 CT	3.2/8/16	500	6.6	1.5	10	2 ³ / ₁₆	2 ⁷ / ₈ x 2	2 ³ / ₈	S	1 lb.
	•TA-58	Driver	100	200 CT	200	6.5	15.5	.5	1 ¹ / ₄	2 x 1 ¹ / ₄	1 ³ / ₄	A	1/2 lb.
	•TA-59	Driver	500 CT	200 CT	50	36.5	15.5	.5	1 ¹ / ₄	2 x 1 ¹ / ₄	1 ³ / ₄	A	1/2 lb.
	•TA-60	Output	125 CT	8	50	7.5	0.9	1.5	1 ³ / ₄	1 ¹ / ₄ x 1 ¹ / ₄	1 ¹ / ₄	TS	3/4 lb.

†2 secondaries: 16 ohm series, 4 ohms parallel.

•New Part Number




power transistor




A1



C



S2



A

TRANSFORMERS FOR TRANSISTOR APPLICATIONS


Miniature Audio Transformers—

.150 Watt Group—Dimensions: H x W x D, $2\frac{1}{32}'' \times 1\frac{1}{16}'' \times \frac{5}{8}''$ Mounting tabs $\frac{3}{16}''$ wide, $\frac{25}{32}''$ centers • Weight .65 oz.

Mounting Type A1


	Part No.	Application	Turns Ratio Pri. to Sec.	Impedance in Ohms		D.C. Resistance in Ohms	
				Pri.	Sec.	Pri.	Sec.
a	TA-18	Input	1.00:45.5	30 C.T.	50,000	14.7	4060
	TA-19	Interstage	3.08:1	100 C.T.	10 C.T.	19	1.27
	TA-20	Output	5.22:1	350 C.T.	4, 12	38	1.45
	TA-21	Output	5.53:1	500 C.T.	4, 8, 16	75.3	3.55
	TA-22	Interstage	3.16:1	500 C.T.	50	59.7	7.9
b	TA-23	Output	5.65:1	600 C.T.	4, 8, 16	73.2	3.2
	TA-24	Interstage	10.0:1	500 C.T.	50,000	76.8	5135
	TA-25	Output	6.75:1	825 C.T.	4, 8, 16	74	2.7
	TA-26	Output	9.80:1	1,250	4, 12	132.5	1.4
	TA-27	Interstage	1:4.08	1,200	20,000 C.T.	142	1860
c	TA-28	Interstage	1.65:1	1,500	500 C.T.	104	46.5
	TA-29	Output	11.8:1	2,500	4, 16	370	2.3
	TA-30	Interstage	1.00:1.22	5,000 C.T.	7,500 C.T.	650	790
	TA-31	Interstage	1.00:1.41	5,000 C.T.	10,000 C.T.	635	1100
	TA-32	Interstage	3:1	5,000 C.T.	45,000	310	1400
d	TA-33	Output	24.6:1	10,000 C.T.	4, 8, 16	1174	2.6
	TA-34	Interstage	6.97:1	10,000	200 C.T.	1200	33.4
	TA-35	Interstage	2.24:1	10,000	2,000 C.T.	1200	257
	TA-36	Interstage	1.83:1	10,000	3,000 C.T.	1200	385
	TA-37	Output	5.55:1	400 C.T.	11	71.5	1.5
	TA-38	Interstage	1.72:1	500 C.T.	150 C.T.	62	21.2

Transistor Impedance Characteristic Curves

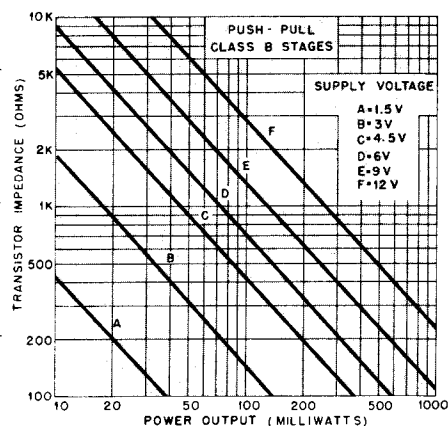

.300 Watt Group—Dimensions: H x W x D, $1\frac{1}{16}'' \times 1\frac{5}{8}'' \times \frac{3}{4}''$ Mounting Centers: $1\frac{3}{8}''$ • Weight 1.2 oz. Mounting Type A

	Part No.	Application	Turns Ratio Pri. to Sec.	Impedance in Ohms		D.C. Resistance in Ohms	
				Pri.	Sec.	Pri.	Sec.
e	TA-39	Output	2.5:1	100 C.T.	4, 8, 16	10.9	1.45
	TA-40	Output	3.27:1	160	4, 8, 16	18.7	1.4
	TA-41	Output	5.00:1	400 C.T.	4, 8, 16	34	1.5
	TA-42	Output	5.60:1	500 C.T.	4, 8, 16	47	.85
	TA-43	Output	6.63:1	700 C.T.	4, 8, 16	77	1.15
f	TA-44	Output	12.5:1	2,500	4, 8, 16	172	1.15
	TA-45	Output	13.7:1	3,000	4, 8, 16	192	1.2
	TA-46	Interstage	8.17:1	100,000	1,500 C.T.	3250	143
	TA-47	Input	50:1	500,000	200 C.T.	7000	8.5
	TA-48	Input	1.00:14.1	1,000 C.T.	200,000 C.T.	123	1815

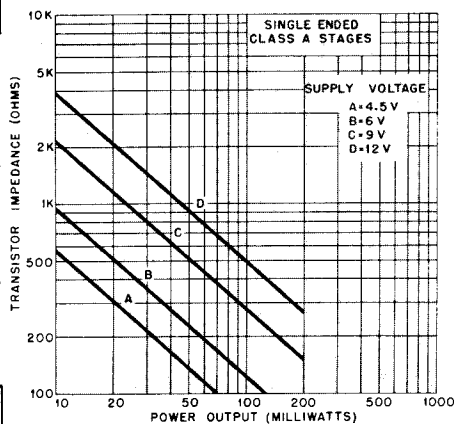

AUTO RADIO TRANSISTOR TRANSFORMERS

Filter Chokes—Dimensions: H x W x D, $1\frac{1}{4}'' \times 1\frac{1}{2}'' \times 1''$

	Part No.	Inductance @ DCMA	DC Res. in Ohms	RMS V. Insulation	Mtg. Type	Mtg. Ctrs.	Weight in Lbs.
g	TC-1	3 mhy @ 1,000 ma	.25	1,000	A2	$1\frac{1}{4} \times \frac{7}{16}$	0.6
	TC-2	11 mhy @ 1,000 ma	.75	1,000	A2	$1\frac{1}{4} \times \frac{7}{16}$	0.6

AUTO RADIO AUDIO TRANSISTOR TRANSFORMERS

	Part No.	Application	Impedance Pri. Sec.	Turns Ratio	Max. Pri. DCMA	DC Res. in Ohms Pri. Sec.	Power in Watts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Weight in Lbs.
h	TA-48	Interstage	1,000Ω 40Ω	5:1	10	136 2.8	2	S2	$1\frac{1}{16}$	$1\frac{1}{2} \times 1\frac{1}{2}$	$1\frac{1}{2} \times 1\frac{1}{2}$	0.6
	TA-49	Output	30Ω CT 4Ω	2.75:1	50 per side	2.2 0.3	10	S	$2\frac{1}{4}$	$1\frac{1}{8} \times 1\frac{1}{8}$	$1\frac{1}{8} \times 1\frac{1}{8}$	1.0
	TA-50†	Output	9Ω tap @ 4Ω	1.5:1	920	1.5 Ω tap @ 1Ω	10	A2	$1\frac{1}{8}$	$2\frac{1}{2} \times 1\frac{1}{2}$	$1\frac{1}{8} \times 1\frac{1}{8}$	1.3
	TA-51	Interstage	1,000Ω 10Ω	10:1	10	170 1	2	S2	$1\frac{1}{16}$	$1\frac{1}{2} \times 1\frac{1}{2}$	$1\frac{1}{2} \times 1\frac{1}{2}$	0.6

TRANSISTOR POWER TRANSFORMER


Primary 117 Volts, 60 Cycle Operation

	Part No.	Plate Supply No. 1 AC Volts DCMA	Plate Supply No. 2 AC Volts DCMA	Height	Base Area	Mtg. Type	Shpg. Wt. in Lbs.
i	TP-1*	13 or 18	900	13 or 18	900	3	$3 \times 2\frac{1}{2}$
							C

*For bridge rectifier systems.

†Autoformer.

•New Part Number.

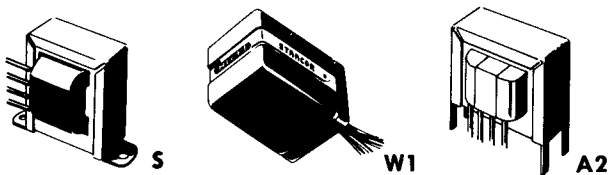

high fidelity




HIGH FIDELITY OUTPUT TRANSFORMERS

These Stancor output transformers combine the most advanced design and manufacturing practices to provide outstanding audio response at low cost. The Stancor-Williamson amplifier, using high fidelity output A-8054, is typical of the exceptional results that can be obtained with these units.

As shown in the curve, these units have an excellent frequency response from 20 to 20,000 cps. They are designed to insure an extremely low level of intermodulation distortion over the

entire frequency range, and at any power level within the rating of the transformer.

Type "C," upright shell mounting is used for all units. Shipping weight 6.5 pounds.

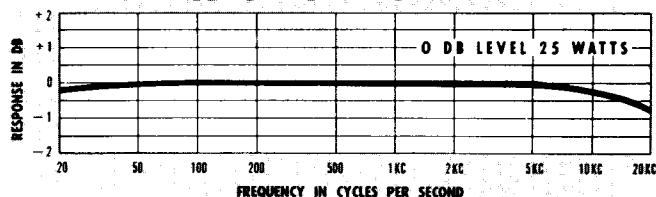

	Part No.	Pri. Imp. (P-P) In Ohms	Sec. Imp. in Ohms#	Max. Pri. D. C. Per Half	Max. Audio Watts	Height Overall	Base Area	Mtg. Ctrs.
a	A-8050	1500	8, 16	200	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8051	2500	8, 16	150	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8052	3000	8, 16	175	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8053	5000	8, 16	150	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8056	6600	8, 16	125	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8054	9000	8, 16	100	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
b	A-8060	1500	500	200	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8061	2500	500	150	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8062	3000	500	175	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8063	5000	500	150	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8066	6600	500	125	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8064	9000	500	100	50	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8
	A-8072*	7600	4, 8, 16	100	25	4 5/8	3 1/8 x 4 1/4	2 3/4 x 3 1/8

#Where more than one secondary impedance is shown, only one value is to be used at any time. *Primary provided with screen taps for Ultra-Linear application.

TONE CONTROL UNIT


	Used in amplifiers for separate control of bass and treble frequencies	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
C C-2332-1		W 1	2 1/2	2 x 2 1/8	1 1/2 x 1 3/8	1.3

STANCOR-WILLIAMSON ULTRA-LINEAR HIGH FIDELITY AMPLIFIER

Now you can build an Ultra-Linear version of the famous Stancor-Williamson Amplifier using the newly developed Stancor output transformer A-8072. Schematics and parts list are described in Stancor Bulletin 479.

Owners of the Stancor-Williamson Amplifier can convert to Ultra-Linear operation with a few simple circuit changes and the installation of A-8072. Conversion instructions are included in Bulletin 479.

Stancor supplies a set of two completely punched and finished chassis for the Ultra-Linear amplifier; Chassis Set WM-8, \$7.50 net. In addition to Stancor Ultra-Linear Output Transformer A-8072, \$16.60 net, this amplifier uses power transformer PC8412, \$9.53 net, and filter choke C-1411, \$4.76 net. The other electronic components used cost about \$45.00. They are all stock parts, and can be readily obtained from your Stancor distributor.

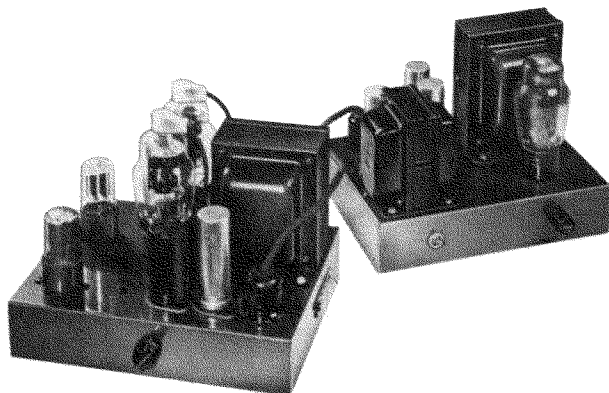

Write for Stancor Bulletin 479, it is available free of charge.



power

COMBINATION PLATE AND FILAMENT SUPPLY

The 8400 Series Power Transformers listed below cover 95% of today's power transformer

needs. All primary windings for 117V-60 cycle operation unless otherwise indicated.

Power Transformers to Provide Approximately 260 Volts D.C. to Condenser Input Filter

	Part No.	Plate Supply		Rectifier Fil.		Other Windings		Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
		A.C. Volts	D.C. Ma.	Volts	Amps.	Volts	Amps.					
a	PC8401 PM8401	235-0-235	40	5.0	2.0	6.3 CT	2.0	PC PM	3 $\frac{3}{16}$ 2 $\frac{1}{2}$	2 $\frac{5}{8}$ x 2 $\frac{3}{8}$ 2 $\frac{1}{2}$ x 3	2 x 1 $\frac{1}{16}$ 2 x 2 $\frac{1}{2}$	2.2
	PC8402 PM8402	240-0-240	55	5.0	2.0	6.3 CT	2.0	PC PM	3 $\frac{3}{16}$ 2 $\frac{1}{2}$	2 $\frac{5}{8}$ x 2 $\frac{3}{4}$ 2 $\frac{1}{2}$ x 3	2 x 1 $\frac{1}{16}$ 2 x 2 $\frac{1}{2}$	2.4
	PC8403 PM8403	250-0-250	70	5.0	2.0	6.3 CT	2.5	PC PM	3 $\frac{3}{16}$ 3 $\frac{1}{8}$	2 $\frac{5}{8}$ x 3 $\frac{1}{8}$ 2 $\frac{1}{2}$ x 3	2 x 2 $\frac{1}{16}$ 2 x 2 $\frac{1}{2}$	3.2
	PC8404 PM8404	260-0-260	90	5.0	2.0	6.3 CT	3.0	PC PM	3 $\frac{3}{16}$ 3 $\frac{3}{8}$	3 x 3 $\frac{1}{2}$ 2 $\frac{5}{8}$ x 3 $\frac{3}{8}$	2 $\frac{1}{4}$ x 2 $\frac{1}{4}$ 2 $\frac{1}{4}$ x 2 $\frac{1}{16}$	4.0
	PC8405 PM8405	270-0-270	120	5.0	3.0	6.3 CT	3.5	PC PM	4 3 $\frac{1}{2}$	3 $\frac{1}{4}$ x 3 $\frac{1}{2}$ 3 $\frac{1}{8}$ x 3 $\frac{3}{4}$	2 $\frac{1}{2}$ x 2 $\frac{3}{16}$ 2 $\frac{1}{2}$ x 3 $\frac{1}{8}$	4.9

Power Transformers for Use With Choke Input Filter, VR-Tube Regulated Supply, Speaker Field In Filter, or Higher Voltage With Condenser Input Filter

	Part No.	Plate Supply		Rectifier Fil.		Other Windings		Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
		A.C. Volts	D.C. Ma.	Volts	Amps.	Volts	Amps.					
b	PM-8423 PC8406 PM8406	300-0-300	90	5.0	2.0	6.3 CT	3.5	PM PC PM	3 3 $\frac{3}{16}$ 2 $\frac{3}{4}$	2 $\frac{1}{16}$ x 3 $\frac{3}{8}$ 2 $\frac{5}{8}$ x 2 $\frac{3}{4}$ 2 $\frac{1}{2}$ x 3	2 $\frac{1}{4}$ x 2 $\frac{7}{8}$ 2 x 1 $\frac{1}{16}$ 2 x 2 $\frac{1}{2}$	4 2.4
	PC8407 PM8407	325-0-325	40	5.0	2.0	6.3 CT	2.0	PC PM	3 $\frac{3}{16}$ 3 $\frac{1}{8}$	2 $\frac{5}{8}$ x 3 $\frac{1}{8}$ 2 $\frac{1}{2}$ x 3	2 x 2 $\frac{1}{16}$ 2 x 2 $\frac{1}{2}$	3.2
	PC8422 PM8422	325-0-325	55	5.0	2.0	6.3 CT	2.0	PC PM	4 3 $\frac{3}{8}$	3 $\frac{1}{4}$ x 3 $\frac{3}{8}$ 3 $\frac{1}{8}$ x 3 $\frac{3}{4}$	2 $\frac{1}{2}$ x 2 $\frac{1}{16}$ 2 $\frac{1}{2}$ x 3 $\frac{1}{8}$	5.8
	PC8408 PM8408	340-0-340	70	5.0	2.0	6.3 CT	2.5	PC PM	3 $\frac{3}{8}$ 3 $\frac{1}{2}$	3 x 3 $\frac{3}{8}$ 2 $\frac{5}{8}$ x 3 $\frac{3}{8}$	2 $\frac{1}{4}$ x 2 $\frac{1}{8}$ 2 $\frac{1}{4}$ x 2 $\frac{1}{16}$	3.8
	PC8409 PM8409	350-0-350	90	5.0	2.0	6.3 CT	3.0	PC PM	3 $\frac{3}{8}$ 3 $\frac{1}{2}$	3 x 3 $\frac{3}{8}$ 2 $\frac{5}{8}$ x 3 $\frac{3}{8}$	2 $\frac{1}{4}$ x 2 $\frac{3}{8}$ 2 $\frac{1}{4}$ x 2 $\frac{1}{16}$	4.5
	PC8410 PM8410	360-0-360	120	5.0	3.0	6.3 CT	3.5	PC PM	4 3 $\frac{3}{4}$	3 $\frac{1}{4}$ x 3 $\frac{3}{4}$ 3 $\frac{3}{8}$ x 3 $\frac{3}{4}$	2 $\frac{1}{2}$ x 2 $\frac{1}{16}$ 2 $\frac{1}{2}$ x 3 $\frac{1}{8}$	5.5
	PC8411 PM8411	375-0-375	150	5.0	3.0	6.3 CT	4.5	PC PM	4 $\frac{1}{8}$ 3 $\frac{7}{8}$	3 $\frac{3}{8}$ x 4 3 $\frac{1}{2}$ x 4 $\frac{1}{8}$	2 $\frac{3}{4}$ x 2 $\frac{1}{16}$ 2 $\frac{3}{4}$ x 3 $\frac{1}{8}$	5.8
	PC8412 PM8412	400-0-400	200	5.0	3.0	6.3 CT	5.0	PC PM	4 $\frac{1}{4}$ 3 $\frac{7}{8}$	4 x 4 3 $\frac{3}{4}$ x 4 $\frac{1}{2}$	3 x 2 $\frac{1}{16}$ 3 x 3 $\frac{3}{4}$	8.2
	PC8413 PM8413	400-0-400	250	5.0	4.0	6.3 CT	5.0	PC	4 $\frac{1}{4}$	4 x 4 $\frac{1}{2}$	3 x 3 $\frac{3}{8}$	10.0
	PC8414	600-0-600	200	5.0	3.0	6.3 6.3	3.0 3.0	PC	4 $\frac{1}{4}$	4 x 4 $\frac{1}{4}$	3 x 3 $\frac{1}{8}$	8.3

*New Part Number.


Power Transformers With Special or Combination Filament Windings

	Part No.	Plate Supply		Rectifier Fil.		Other Windings		Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
		A.C. Volts	D.C. Ma.	Volts	Amps.	Volts	Amps.					
d	P-6348	240-0-240	60			6.3 CT	2.75	M	2 $\frac{3}{4}$	2 $\frac{1}{16}$ x 2 $\frac{1}{16}$	1 $\frac{1}{16}$	2.3
	P-8173	250-0-250	10			6.3 6.3	0.6 1.2	C1	2 $\frac{1}{4}$	2 $\frac{1}{8}$ x 2 $\frac{1}{8}$	2 $\frac{3}{8}$	1
	P-8174	250-0-250	20			6.3 6.3	0.6 1.2	C1	2 $\frac{3}{8}$	3 $\frac{1}{16}$ x 2 $\frac{1}{4}$	2 $\frac{1}{16}$	1 $\frac{1}{2}$
	P-8175	300-0-300	70	5.0	3.0	6.3 CT	3	C	3 $\frac{1}{2}$	2 $\frac{7}{8}$ x 3 $\frac{1}{8}$	2 $\frac{1}{4}$ x 2 $\frac{1}{4}$	4
	P-8177	300-0-300	120	5.0	3.0	6.3 CT	5.0	C	3 $\frac{7}{8}$	3 $\frac{1}{16}$ x 3 $\frac{3}{8}$	2 $\frac{1}{4}$ x 2 $\frac{3}{4}$	5 $\frac{3}{4}$
	P-6001	325-0-325	40	5.0 CT	2.0	2.5 CT	4.0	M	2 $\frac{3}{4}$	2 $\frac{1}{2}$ x 3	2 x 2 $\frac{1}{2}$	2.5
	P-4047	350-0-350	70	5.0	3.0	2.5 CT 6.3 CT	9.0 3.0	C	4	3 $\frac{1}{4}$ x 3	2 $\frac{1}{2}$ x 1 $\frac{1}{16}$	3.8
	P-8176	350-0-350	110	5.0	2.0	6.3 CT 6.3 CT	3.0 3.0	C	3 $\frac{7}{8}$	3 $\frac{1}{16}$ x 3 $\frac{7}{8}$	2 $\frac{3}{4}$ x 3	5 $\frac{1}{2}$
	P-6007	400-0-400	110	5.0 CT	3.0	2.5 CT 2.5 CT	15.0 3.5	M	3 $\frac{3}{8}$	3 $\frac{1}{8}$ x 3 $\frac{3}{4}$	2 $\frac{1}{2}$ x 3 $\frac{1}{8}$	5.4
	P-6008	375-0-375	180	5.0 CT	3.0	2.5 CT 6.3 CT	6.0 3.3	M	3 $\frac{3}{8}$	3 $\frac{1}{2}$ x 4 $\frac{1}{8}$	2 $\frac{3}{4}$ x 3 $\frac{1}{16}$	6.2
e	P-6143	440-0-440	130	5.0	3.0	6.3 CT	3.5	C	4 $\frac{1}{8}$	3 $\frac{5}{8}$ x 4 $\frac{1}{8}$	2 $\frac{3}{4}$ x 2 $\frac{1}{16}$	7.0
	P-4004#	400-0-400 80v Bias	175	5.0 CT	3.0	2.5 6.3 CT	1.75 2.5	C	4 $\frac{3}{4}$	4 x 3 $\frac{7}{8}$	3 x 2 $\frac{1}{16}$	8.3
	P-5059#	337.5-0-337.5	200	5.0 CT	3.0	6.3 CT	5.0	C	4 $\frac{3}{8}$	3 $\frac{3}{4}$ x 4 $\frac{1}{8}$	3 x 3 $\frac{3}{16}$	9.6
	P-6315	370-0-370	275	5.0 CT	3.0	6.3 CT	7.0	M	4 $\frac{1}{4}$	3 $\frac{3}{4}$ x 4 $\frac{1}{2}$	3 x 3 $\frac{3}{4}$	9.3
	P-8307§	870-0-870	150	5.0	2.0	6.3	3.5	TD	4 $\frac{1}{4}$	3 $\frac{1}{16}$ x 4 $\frac{7}{16}$	2 $\frac{3}{4}$ x 3 $\frac{7}{8}$	5.9
		410-0-410	60									


All Primary Windings for 117V-60 cycle operation unless otherwise indicated.

§Intermittent duty.


#Primary for 117-107 volts.




PC




TD




PA




PM




M



PS



C



C-1

COMBINATION PLATE AND FILAMENT SUPPLY—Continued

Power transformers with Special or Combination Windings


	Part No.	Plate Supply		Rectifier Fil.		Other Windings		Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
		A.C. Volts	D.C. Ma.	Volts	Amps.	Volts	Amps.					
a	P-6010	325-0-325	40	5.0 CT	3.0	6.3 CT	2.0	M	2 3/4	2 1/2 x 3	2 x 2 1/2	2.4
	P-6011	350-0-350	70	5.0 CT	3.0	6.3 CT	2.5	M	3 3/8	2 1/2 x 3	2 x 2 1/2	3.5
	P-6012	350-0-350	90	5.0 CT	3.0	6.3 CT	3.5	M	3 3/8	2 7/8 x 3 3/8	2 1/4 x 2 13/16	4.2
	P-6013	350-0-350	120	5.0 CT	3.0	6.3 CT	4.7	M	3 3/8	3 1/8 x 3 3/4	2 1/2 x 3 1/8	5.2
	P-6014	375-0-375	150	5.0 CT	3.0	6.3 CT	5.0	M	3 3/4	3 1/8 x 3 3/4	2 1/2 x 3 1/8	6.0
	P-6119	300-0-300	55	5.0 CT	2.0	6.3 CT	2.7	M	2 7/8	2 1/2 x 3	2 x 2 1/2	2.5

Power Transformers For Use With 6AX5, 6X4, 6X5, or Selenium Rectifiers

	Part No.	Plate Supply		Rectifier Fil.		Other Windings		Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
		A.C. Volts	D.C. Ma.	Volts	Amps.	Volts	Amps.					
b	PS8415	125 1/2-wave	15			6.3	0.6	PS	2	2 3/8 x 1 3/8	2	0.7
	PS8416	125-0-125	25			6.3	1.0	PS	2 5/16	2 7/8 x 1 1/4	2 3/8	1.0
	PA8421	125 1/2-wave	50			6.3	2.0	PA	2 1/4	3 3/4 x 2 1/8	3 1/8	1.5
	PC8417	220-0-220	50	6.3	0.6	25.2	0.5	PC	3 3/16	2 5/8 x 2 5/8	2 x 1 1/16	2.2
	PC8418	230-0-230	50			6.3	2.5	PC	3 3/16	2 5/8 x 2 5/8	2 x 1 1/16	2.2
	PM8418							PM	2 5/8	2 1/2 x 3	2 x 2 1/2	
	PC8419	240-0-240	70			6.3	3.0	PC	3 3/16	2 5/8 x 2 7/8	2 x 1 13/16	2.6
	PM8419							PM	2 7/8	2 1/2 x 3	2 x 2 1/2	
	PC8420	260-0-260	90			6.3	4.0	PC	3 1/2	3 x 3 1/2	2 1/4 x 2	3.5
	PM8420							PM	3 1/2	2 7/8 x 3 3/8	2 1/4 x 2 13/16	
	•P-6358	300-0-300	65			6.3 CT	2.7	C	3 1/8	2 5/8 x 2 1/2	2 x 1 1/4	3

All Primary Windings for 117V-60 cycle operation unless otherwise specified.

•New Part Number.

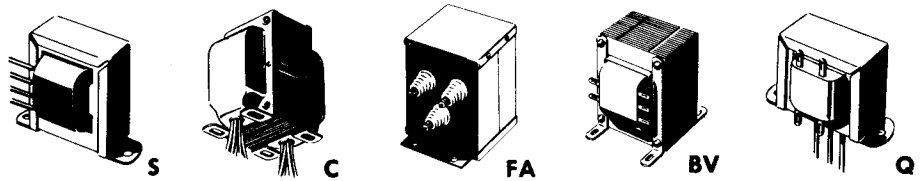

RECTIFIER TRANSFORMERS

Primary: 117 V., 50/60 Cycles

These transformers have been designed to operate in Full-Wave Center-Tapped or Bridge type circuits with readily available stock sizes of rectifiers. Each transformer has a tapped primary and a tapped additional winding. By using the primary

taps and the aiding or bucking action of the additional winding . . . a wide range of output voltages can be obtained. For other details, terminal connections, output voltages, etc., write for Stancor bulletin No. 518R.

Part No.	Rectifier Circuit	Range of Applied A.C. Volts Under Load (Approx.)	Output Resistive or Inductive Load Max. D.C.		Output Capacitive Load* Max. D.C.		Mtg. Type	Overall Dimensions			Mtg. Ctrs.	Shpg. Wt. In Lbs.
			Volts	Amps.	Volts	Amps.		H	W	D		
RT-201	C. T. Bridge	11.7 to 29.4	11.2	2.0	13.8 ¹	2.0	BV	3 1/8	2 1/2	3 3/8	2 x 2 1/8	2.5
RT-202	C. T. Bridge	12.0 to 29.8	11.1	4.0	14.7 ³	4.0	BV	3 3/8	2 7/8	3 1/2	2 1/4 x 2 3/8	3.8
RT-204	C. T. Bridge	11.7 to 29.2	12.0	8.0	14.5 ⁴	8.0	BV	4	3 1/4	4 1/8	2 1/2 x 2 7/8	6.1
RT-206	C. T. Bridge	12.0 to 29.7	11.5	12.0	14.4 ⁵	12.0	BV	4 1/4	3 3/16	5 1/8	2 3/4 x 3 1/4	9.1
RT-208	C. T. Bridge	12.1 to 29.2	11.4	15.0	14.8 ⁷	15.0	BV	4 3/4	3 3/4	5 1/4	2 13/16 x 3 3/4	12.6
RT-2012	C. T. Bridge	12.2 to 29.0	11.4	22.5	14.3 ⁸	22.5	BV	5 3/8	4 3/8	6 3/8	3 1/2 x 4 1/4 §	20.5
RT-408	Bridge	25.0 to 53.5	44.0	8.0	33.0 ⁴	8.0	BV	5 3/8	4 3/8	7 1/2	3 1/2 x 5 1/4	26.5
RT-4012	Bridge	25.0 to 53.0	43.5	12.0	60.0 ⁵	12.0	BV	7 1/8	5 5/8	6 5/8	4 5/8 x 5 5/8	33.5

*Transformers and Rectifiers will have a higher temperature rise when operating with a capacitive load as compared to a resistive or inductive load for a given load current. If this is undesirable, extra ventilation should be provided or else the output current from the rectifier should be derated by approximately 20% from the values shown.

RT Footnotes: MFD. Filter Capacitor, 1—1,000, 2—500, 3—2,000, 4—4,000, 5—6,000, 6—3,000, 7—7,500, 8—12,000.

§Tolerance on all dimensions is plus or minus 1/16" except § = plus or minus 1/4".

Part No.	Primary	Secondary	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
•P-8193	117 V. 50/60	17 or 18 V. A.C. @ 6A R.M.S.	BV	3 3/4	3 1/8 x 3 3/8	2 1/2 x 2 3/8	6
•P-8194	117 V. 50/60	36 V. A.C. @ 3A R.M.S. 36 V. A.C. @ 3A R.M.S. (Multiple Secondary)	BV	4 1/2	3 3/4 x 4	3 x 3	10

•New Part Number

For other details, terminal connections, suggested circuits, output voltages, etc., write for Stancor Bulletin No. 587.

HIGH CURRENT FILTER CHOKES

May be used in conjunction with Rectifier Transformers

Inductance values rated at 1 Volt RMS, 60 cycles.

Part No.	Inductance in Hys.	@	D.C. Amps.	D.C. Resistance in Ohms	R.M.S. V. Insulation	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
C-2685	.035	@	2.0	.75	1500	2 3/8	2 5/8 x 2 3/4	2 3/16 x 2	BH	1.9
C-2686	.025	@	4.0	.425	1500	3	3 3/8 x 2 7/8	2 13/16 x 2 1/8	BH	3.4
C-2687	.01	@	8.0	.15	1500	3 1/4	3 3/4 x 3 1/8	3 1/8 x 2 1/2	BH	5.3
C-2688	.01	@	12.5	.11	1500	3 1/2	4 1/8 x 3 1/8	3 3/8 x 2 3/8	BH	5.9
C-2689	.005	@	22.5	.03	1500	3 3/4	4 1/2 x 4 1/2	3 3/4 x 3 1/2	BH	11.9
•C-2690*	0.3 & 0.075	@	1 & 2	3.0 & 0.75	1500	3 3/16	2 7/8 x 3 1/4	2 1/4 x 2 5/8	BV	5
•C-2691*	.08 & .02	@	2.5 & 5	0.6 & 0.15	1500	3 3/4	3 1/8 x 3 3/4	2 1/2 x 3	BV	7

•New Part Number

*Unit has dual windings for Series or Parallel operation; First rating is Series, Second is Parallel.

FILAMENT TRANSFORMERS WITH SINGLE SECONDARY


Part No.	Secondary Volts	Ampere	R.M.S. V. Insul.	Primary Volts#	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-4026	2.5	1.5	2,500	117	A	1 5/8	2 7/8 x 1 1/2	2 3/8	0.7
P-4082	2.5 CT	2.5	2,500	117/107	TD	2 11/16	2 3/4 x 2 1/4	2 3/8 x 1 1/2	1.5
P-6133†	2.5 CT	5.0	7,500	117	S	2 11/16	3 3/8 x 2 1/4	2 13/16	1.5
P-4083†	2.5 CT	6.0	2,500	117/107	C	3 3/16	2 5/8 x 2 3/8	2 x 1 7/16	2.2
P-3024†	2.5 CT	10.0	2,500	117/107	C	3 3/16	2 5/8 x 2 3/8	2 x 1 11/16	2.5
P-6454	2.5 CT	10.0	7,500	117/107	S	3 1/8	3 3/8 x 2 1/2	3 1/8	2.5
P-3060	2.5 CT	10.0	10,000	117	BV	3 1/2	2 5/8 x 2 1/2	2 1/4 x 1 7/8	2.5
P-3026†	5.0 CT	3.0	2,500	117/107	C	3 3/16	2 5/8 x 2 3/8	2 x 1 11/16	2.4
P-4088†	5.0 CT	3.0	2,500	117	BV	3 1/8	2 1/2 x 2 1/2	2 x 1 5/8	1.8
P-6467	5.0 CT	3.0	2,500	117	A	2	3 3/8 x 2	2 13/16	1.4
P-6455	5.0 CT	6.0	2,000	117/107	S	2 3/8	3 3/8 x 2 1/4	2 11/16	2.0
P-3062†	5.0 CT	6.0	2,500	117	BV	3 1/8	2 1/2 x 2 1/2	2 x 2	2.3
P-5000	5.0 CT	6.0	2,500	117/107	C	3 3/16	2 1/2 x 3	2 x 1 11/16	3.1
P-6135	5.0 CT	10.0	2,500	117	BV	3 3/8	2 1/2 x 2 7/8	2 x 2 3/8	3.0
P-4086†	5.0 CT	14.0	10,000	117/107	FA	5 1/8	4 3/8 x 8 1/2	2 3/4 x 6	12.3
•P-6433	5.0 CT	15.0	2,500	117	BV	3 3/8	2 1/2 x 2 7/8	2 x 2 1/4	3
•P-6432	5.0 CT	21.0	2,500	117	BV	3 3/8	3 x 3 3/8	2 1/4 x 2 1/2	4.5
P-6302†	5.0 CT	22.0	10,000	117/107	FA	5 1/8	4 3/8 x 8 1/2	2 3/4 x 6	13.5
P-6492	5.0 CT	30.0	2,500	117	C	4 3/4	3 3/4 x 3 3/8	3 x 2 3/4	7.5
P-6468	5.0 CT	30.0	2,500	117/107	D	4 5/8	3 3/8 x 3 3/8	2 3/4 x 2 11/16	4.3
P-6305	5.0 CT	30.0	10,000	117/107	FA	5 1/8	4 3/8 x 10	3 3/8 x 7 3/4	18.3
P-6137†	5.25 CT	13.0	2,500	117	BV	3 3/8	3 3/8 x 3 1/4	2 1/2 x 2 1/2	5.2

Continued on page 17


†Has electrostatic shield.

•New Part Number.


#All Primaries for 50 or 60 cycle operation.




A



TD



D



BH



filament

FILAMENT TRANSFORMERS WITH SINGLE SECONDARY Cont.

	Part No.	Secondary Volts	Amperes	R.M.S. V. Insul.	Primary Volts#	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
a	P-6465	6.3 CT	.6	1,500	117	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	P-6134	6.3 CT	1.2	3,000	117	A	1 3/8	2 3/8 x 1 3/8	2 3/8	0.8
	P-8190	6.3	1.2	5,000	117	A	2	3 1/4 x 1 3/4	2 13/16	1.0
	P-8191	6.3	1.2	5,000	6.3	A	2	3 1/4 x 1 3/4	2 13/16	1.0
	P-5014†	6.3 CT	3.0	2,500	117	BV	3 1/8	2 1/2 x 2 1/2	2 x 1 3/4	2.0
	P-6466	6.3 CT	3.0	2,500	117	A	2	3 5/8 x 2	2 13/16	1.4
	P-6462	6.3	3.0	7,000	117/107	S	3	3 3/8 x 2 3/8	3 3/8	2.0
	P-4019†	6.3 CT	4.0	2,500	117/107	C	3 3/8	2 3/8 x 2 3/8	2 x 1 11/16	2.7
	P-3064†	6.3 CT	6.0	2,500	117	BV	3 1/8	2 1/2 x 2 3/8	2 x 2	2.4
	P-4089†	6.3 CT	6.0	2,500	117/107	C	3 3/8	3 x 3 3/8	2 1/4 x 2	3.5
	P-6456	6.3 CT	6.0	2,000	117/107	A	2 1/4	3 3/8 x 2 1/2	3 3/8	2.0
	P-6464	6.3 CT	10.0	2,000	117	C	3 1/2	3 x 3 3/4	2 x 2 1/4	3.5
	P-6308†	6.3 CT	10.0	2,500	117/107	BV	3 1/2	2 7/8 x 2 7/8	2 1/4 x 2 7/8	3.4
		6.0 CT								
	P-6463*	6.5 CT	13.0	2,000	117	BV	3 3/8	2 13/16 x 3 3/8	2 1/4 x 2 11/16	4.5
		or 7.0 CT								
	P-6309†	6.3 CT	20.0	2,500	117/107	BV	4 3/8	3 3/4 x 3	3 x 2 3/8	6.7
b	P-5015†	7.5 CT	4.0	2,500	117	BV	3 3/8	2 1/2 x 2 7/8	2 x 2 1/8	2.7
	P-4091†	7.5 CT	5.0	2,500	117/107	C	3 3/8	3 x 3	2 1/4 x 1 7/8	3.4
	P-6138†	7.5 CT	8.0	2,500	117	BV	3 3/8	3 1/8 x 2 7/8	2 1/2 x 2 3/8	4.7
	P-6457	7.5 CT	21.0	2,000	117/107	C	4 1/2	3 3/4 x 4	2 3/4 x 3	8.0
	P-5016†	10.0 CT	4.0	2,500	117	BV	3 1/2	2 7/8 x 2 3/8	2 1/4 x 2 1/8	3.3
	P-6458	10.0 CT	5.0	2,000	117/107	BV	3 1/8	2 1/2 x 2 7/8	2 1/8 x 2	3.0
	P-4096†	10.0 CT	5.0	2,500	117/107	C	4	3 1/4 x 3 3/8	2 1/2 x 1 15/16	4.0
	P-6139†	10.0 CT	8.0	2,500	117	BV	3 3/8	3 3/8 x 3 3/8	2 1/2 x 2 3/8	4.9
	P-4097†	10.0 CT	8.0	2,500	117/107	C	4	3 1/4 x 3 3/8	2 1/2 x 2 7/8	5.2
	P-6461	10.0 CT	10.0	2,000	117	C	3 3/8	3 1/4 x 3 3/8	2 3/4 x 2 3/4	5.0
	P-5002†	10.0 CT	12.0	7,500	117/107	FA	5 1/8	4 3/8 x 8 1/2	2 3/4 x 6	14.7
	P-3020†	11.0 CT	10.0	2,500	117/107	C	4 3/4	4 x 3 1/2	3 x 2 7/8	7.7
	P-8130	12.6 CT	2.0	1,500	117	A	2	3 1/4 x 2	2 13/16	1.4
	P-6469	25.2	1.0	1,500	117	A	2	3 1/4 x 2	2 13/16	1.4

#All Primary Windings for 50 or 60 cycle operation.

*Secondary Voltage is obtained by means of Primary Tap.

•New Part Number.

†Has electrostatic shield

FILAMENT TRANSFORMERS WITH MULTIPLE SECONDARY

	Part No.	Secondary Volts	Amperes	R.M.S. V. Insul.	Primary Volts#	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
c	P-6144†	2.5 CT	3.5	2,500	117	C	3 3/8	3 x 1/8	2 1/4 x 2	3.7
		5.0 CT	3.0	2,500						
		6.3 CT	3.0	2,500						
		2.5	3.0	2,500						
	P-6338	5.0	3.0	2,500	117	BV	3 1/2	2 7/8 x 2 3/4	2 1/4 x 2 1/8	3.4
		5.0 CT	2.0	2,500						
		6.3 CT	3.0	2,500						
		5.0 CT	3.0	2,500						
	P-5009†	6.3 CT	6.0	2,500	117/107	C	4	3 1/4 x 3 1/4	2 1/2 x 2 13/16	4.5
		5.0 CT	4.0	2,500						
	P-5008†	6.3 CT	3.6	2,500	117/107	C	3 3/8	3 x 3 1/4	2 1/4 x 2 1/8	3.8
		5.0 CT	6.0	2,500						
	P-4022†	6.3 CT	6.0	2,500	117/107	C	4	3 1/8 x 3 1/2	2 1/2 x 2 3/16	4.8
		5.0	3.0	2,500						
	P-6333	5.0	3.0	2,500	117	BH	2 7/8	2 7/8 x 3 3/8	2 13/16 x 2 7/16	4.7
		6.3 CT	4.0	2,500						
		7.5/6.3 CT	3.0	2,500						
d	P-6428†	6.3	1.75	2,500	117	C	3 1/8	2 1/2 x 3	2 x 1 15/16	3
		6.3	1.75	2,500						
		6.3	1.75	2,500						
		6.3 CT	1.75	2,500						
	P-6429†	6.3	3.5	2,500	117	C	3 3/8	3 1/8 x 3 1/2	2 1/2 x 2 3/16	4.8
		6.3	3.5	2,500						
		6.3 CT	3.5	2,500						
		6.3	3.5	2,500						
	P-6430†	6.3 CT	3.0	2,500	117	C	3 1/8	2 1/2 x 3 3/8	2 x 1 13/16	2.8
		6.3 CT	3.0	2,500						
	P-6431†	6.3 CT	6.0	2,500	117	C	3 3/8	3 1/8 x 3 1/2	2 1/2 x 2 3/16	4.8
		6.3 CT	6.0	2,500						

#All Primary Windings for 50 or 60 cycle operation.

†Has electrostatic shield.

TUBE CHECKER MULTI-TAPPED FILAMENT TRANSFORMER

	Part No.	Secondary Volts	Primary Volts	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
e	P-1834-3	1.1/1.4/1.5/2.0/2.5/3.0/3.3/4.0/5.0/6.3/7.0/7.5/12/20/25/30/35/50/70/85/110/117	125/115/105	Q	2 3/8	4 x 2 1/2	3 3/8	2.4









PLATE TRANSFORMERS

All Primary Windings for 60 Cycle Operation

	Part No.	Pri. Volts	Sec. A.C. Volts At Plate	D.C. Volts	DCMA		Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
					CCS	ICAS					
a	P-8040	115	500/40-0-500	400 40	300	375	C	4 3/4	4 x 4 1/2	3 x 3 3/8	9.8
	P-8041	115	615/520/40-0-520/615	500 400 40	250	310	C	4 3/4	4 x 5 1/8	3 x 4 1/8	13.6
	P-8042	115	770/510/40-0-510/770	600 400 40	300	375	C	4 3/4	4 x 6 3/8	3 x 5 5/8	18.0
	P-8043	115	950/750/40-0-750/950	750 600 40	300	375	FS-1	7 1/8	5 5/8 x 6 3/4	4 3/8 x 4	29.0
	P-8044†	115	1200-0-1200 535-0-535	1000 400	150 150	190 190	FS	7 5/8	6 1/8 x 8 1/4	4 3/4 x 4	29.8
b	P-8025	115	1230/940-0-940/1230	1000 750	400	500	FS-1	7 1/8	5 5/8 x 7 1/2	4 5/8 x 4 3/4	35.0
	P-8026	115	1475/1175-0-1175/1475	1250 1000	300	375	FS-1	7 1/8	5 5/8 x 7 1/2	4 5/8 x 4 3/4	36.5
	P-8027	115	1510/1210-0-1210/1510	1250 1000	500	625	FS-1	7 1/8	5 5/8 x 8 1/4	4 5/8 x 5 1/2	45.2
	P-8028	115	1740/1460-0-1460/1740	1500 1250	300	375	FS-1	7 1/8	5 5/8 x 7 3/4	4 5/8 x 5	38.7
	P-8029	115-230	1775/1500-0-1500/1775	1500 1250	500	625	FS-1	9	7 1/4 x 8 1/8	6 x 5 5/8	65.0
c	P-8030	115	2100/1800-0-1800/2100	1750 1500	300	375	FS	7 1/8	5 5/8 x 7 1/4	4 5/8 x 5 1/2	45.8
	P-8031	115-230	2075/1775-0-1775/2075	1750 1500	500	625	FS-1	9	7 1/4 x 8 1/8	6 x 5 5/8	65.5
	P-8032	115	2400/2100-0-2100/2400	2000 1750	300	375	FS	7 1/8	5 5/8 x 8	4 5/8 x 6 1/4	46.0
	P-8033	115-230	2375/2065-0-2065/2375	2000 1750	500	625	FS	9	7 1/4 x 8 3/8	6 x 5 5/8	77.0
	P-8034	115-230	2900/2385-0-2385/2900	2500 2000	300	375	FS	9	7 1/4 x 8 1/8	6 x 5 5/8	62.8
	P-8035	115-230	2950/2375-0-2375/2950	2500 2000	500	575	FS-1	9	7 1/4 x 9 5/8	6 x 7 1/8	80.0

D.C. Output Rated at Load Terminals of Single-Section

Reactor-Input Filter With Full-Wave Mercury-Vapor Rectification—Mounting Type PT


	Part No.	Primary A.C. Volts	Secondary A.C. Volts	D.C. Volts	DCMA		Height	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
					CCS	ICAS				
d	PT8311	117	1200-0-1200	1000	225	280	4 3/4	4 x 5 1/8	3 x 4 1/8	13.0
	PT8312	117	1200-0-1200	1000	325	405	5 3/8	4 5/8 x 6 3/8	3 1/2 x 5 1/8	22.2
	PT8313	117	1475-0-1475	1250	250	310	5 3/8	4 5/8 x 6 1/2	3 1/2 x 5	22.3
	PT8314	117	1790-0-1790	1500	225	280	6	4 1/2 x 6 3/8	3 3/8 x 5	24.0
	PT8315	117	2065-0-2065	1750	200	250	6	4 1/2 x 6 3/4	3 3/8 x 5 1/8	24.5

D.C. Output Rated at Load Terminals of Single-Section Reactor-Input Filter,

ICAS With Single-Section Capacitor-Input Filter—Mounting Type PC

	Part No.	Primary A.C. Volts	Secondary A.C. Volts	D.C. Output		Type Filter	Rectifier	Height	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
				Volts	MA.						
e	PC8301	117	415-0-415	300	200	Reactor Input	5U4G	4	3 1/4 x 3 3/8	2 1/2 x 2 3/8	4.8
				425	160	Capacitor Input#	5U4G				
	PC8302	117	515-0-515	385	235	Reactor Input	5U4G	4 3/8	3 3/8 x 4 1/8	2 3/4 x 2 1 3/8	6.8
				500	200	Capacitor Input#	5R4GY				
	PC8303	117	665-0-665	500	250	Reactor Input	5R4GY	4 3/4	4 x 4 3/8	3 x 3 3/8	9.6
				750	200	Capacitor Input#	5R4GY				
	PC8304	117	750-0-750	600	265	Reactor Input	2-5R4GY	4 3/4	4 x 4 7/8	3 x 3 1 1/8	11.5
				850	200	Capacitor Input#	5R4GY				
	PC8305	117	920-0-920	750	250	Reactor Input	2-5R4GY	4 3/4	4 x 5	3 x 3 3 3/8	11.9
				1000	200	Capacitor Input#	5R4GY				
	PC8306†	117	920-0-920 500-0-500	750	150	Reactor Input	5R4GY	4 3/4	4 x 5	3 x 3 3 3/8	11.9
				1100	125	Capacitor Input#	5R4GY				
				380	150	Reactor Input	5U4G				
				550	125	Capacitor Input#	5U4G				

†Tapped for use with dual rectifier-filter systems to deliver two rated outputs simultaneously. #Capacitor input rating is for intermittent duty.

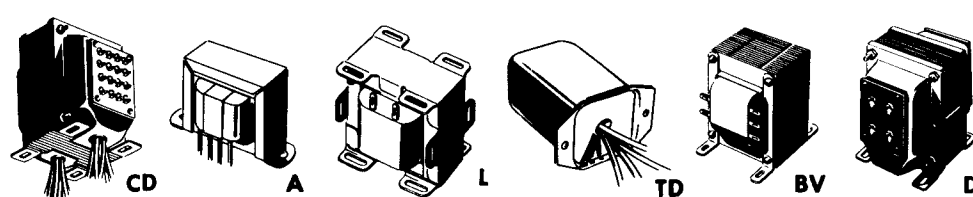

choke
power



BIAS SUPPLY TRANSFORMERS

Primaries for 117 volt, 60 cycle operation

	Part No.	High Voltage Supply A.C. Volts at D.C. Milliamps.	Rectifier Fil. Volts	Amperes	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
a	P-6317	200/170/130/90/0/90/130/170/200 @ 200 ma	5.0	3.0	CD	4	3 1/4 x 3 3/4	2 1/2 x 2 3/8	4.9
	P-6318	450/400/350/250/0/250/350/400/450 @ 200 ma	5.0	3.0	CD	4 1/8	3 3/8 x 4 1/8	2 3/4 x 2 13/16	7.0

SMOOTHING CHOKES

For D.C. Power Supplies

Inductance varies with the amount of D.C. flowing through the coil, therefore these units have been tested under uniform conditions.

They are rated at 10 volts, 60 cycles with maximum D.C. in winding. Tolerance of minus 15%, plus 50% is maintained on all inductance ratings.

	Part No.	Rating Induc. at DCMA	D.C. Res. In Ohms	R.M.S. V. Insul.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
b	•C-2344	1.5 hy. at 10 ma.	85	2500	A	1 1/4	2 1/8 x 1 1/8	1 3/4	0.5
	C-1515	20.0 hy. at 15 ma.	900	1500	A	1 1/8	2 1/8 x 1 1/2	2 3/8	0.7
	C-2318	12.0 hy. at 30 ma.	400	2000	A	1 3/8	2 3/8 x 1 3/8	2	0.5
	C-1706	4.5 hy. at 50 ma.	300	1500	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	C-1707	7.0 hy. at 50 ma.	550	1500	A	1 3/8	2 3/8 x 1 3/8	2	0.4
	C-1003	16.0 hy. at 50 ma.	580	1500	A	2	3 1/4 x 1 3/4	2 13/16	1.1
	C-1708	13.0 hy. at 65 ma.	500	1500	A	2	3 1/4 x 1 3/4	2 13/16	1.0
	C-1355	8.0 hy. at 75 ma.	290	1500	L	2 1/16	2 3/8 x 1 3/4	1 3/8 x 1 1/2	1.0
	C-1002	15.0 hy. at 75 ma.	400	1500	A	2 1/4	3 3/8 x 2 1/4	3 1/8	1.7
	C-1420	16.0 hy. at 80 ma.	360	1500	C	3 3/8	2 5/8 x 2 5/8	2 x 1 11/16	2.5
c	C-1709	8.0 hy. at 85 ma.	250	1500	A	2	3 1/4 x 2	2 13/16	1.4
	C-2305	5.0 hy. at 100 ma.	300	1500	TD	2 11/16	2 3/4 x 2 3/8	2 3/8 x 1 1/2	1.5
	C-1001	10.5 hy. at 110 ma.	225	3000	A	2 3/8	4 x 2 1/4	3 3/8	2.3
	•C-2704	9.0 hy. at 125 ma.	250	1500	A	2 1/4	3 5/8 x 1 3/8	3 3/8	1.8
	C-2303	2.5 hy. at 130 ma.	100	2000	A	2	3 1/4 x 1 3/4	2 13/16	1.0
	C-1421	7.0 hy. at 140 ma.	165	3000	C	3 3/8	2 5/8 x 2 5/8	2 x 1 11/16	2.5
	C-2304	2.3 hy. at 150 ma.	60	1500	A	2	3 1/4 x 1 3/4	2 13/16	1.0
	C-2309	3.0 hy. at 150 ma.	90	2000	A	2 1/4	3 3/4 x 2 1/4	3 1/8	1.7
	C-1710	7.0 hy. at 150 ma.	200	1500	A	2 5/8	4 x 2 1/4	3 3/8	2.2
	C-2335	7.0 hy. at 150 ma.	170	1500	TD	3	2 1/2 x 3	1 3/4 x 2 11/16	2.3
d	C-1410	4.0 hy. at 175 ma.	100	3000	C	3 3/8	2 5/8 x 2 5/8	2 x 1 11/16	2.4
	C-2327	1.5 hy. at 200 ma.	85	1500	A	1 3/8	2 1/8 x 1 1/2	2 3/8	0.8
	C-2325	2.0 hy. at 200 ma.	60	1500	A	2 1/4	3 3/4 x 2 1/4	3 1/8	1.8
	C-1646	5.0 hy. at 200 ma.	90	5000	C	4	3 1/4 x 3 3/8	2 1/2 x 2 3/8	4.5
	C-1411	4.5 hy. at 200 ma.	80	3000	C	3 3/8	3 x 3 3/8	2 1/4 x 2	3.5
	C-1721	8.5 hy. at 200 ma.	120	3000	NV	3 3/8	3 1/8 x 3	3 1/2 x 2 1/4	4.4
	•C-2705	10.0 hy. at 200 ma.	150	2500	C	3 3/8	3 x 3 1/2	2 1/4 x 2 3/8	4.5
	C-1703	4.0 hy. at 250 ma.	60	3000	BV	3 1/2	2 1/8 x 3 3/8	2 1/4 x 2 1/2	4.2
	C-1412	4.0 hy. at 250 ma.	60	3000	C	3 3/8	3 x 3 1/2	2 1/4 x 2 3/8	4.3
	C-2326	1.0 hy. at 300 ma.	43	1500	A	2 1/4	3 3/4 x 2 1/4	3 1/8	1.7
e	C-2334	2.8 hy. at 300 ma.	60	1500	A	2 5/8	2 1/4 x 4	3 3/8	2.5
	C-1722	8.0 hy. at 300 ma.	80	3000	NV	4 3/8	3 3/4 x 3 1/2	3 x 2 1/2	7.3
	C-2308	8.0 hy. at 300 ma.	80	3000	C	4 3/4	4 x 3 3/8	3 x 2 13/16	7.8
	C-1413	8.0 hy. at 300 ma.	80	5000	D	4 3/4	4 x 4 1/8	3 x 2 13/16	7.8
	•C-2706	2.6 hy. at 310 ma.	50	1500	C	3 3/8	2 5/8 x 3 1/4	2 x 2 3/8	4.0
	C-2328	0.8 hy. at 375 ma.	25	1500	A	2 1/4	3 3/4 x 2	3 1/8	1.5
	C-1414	7.5 hy. at 400 ma.	60	5000	D	4 3/4	4 x 5 1/8	3 x 3 13/16	11.8
	C-1415	6.0 hy. at 500 ma.	75	7500	FS-1	7 1/8	5 5/8 x 5 1/2	4 5/8 x 3 3/8	23.7

•New Part Number


SWINGING CHOKES

For Input Section of D.C. Power Supplies

Inductance varies with the amount of D.C. flowing through the coil. Therefore these units have been tested under uniform conditions. Swinging chokes are rated at 10 volts, 60 cycles,

from maximum to 10% of maximum D.C. in winding. Tolerance of minus 15%, plus 50% is maintained on all inductance ratings.

	Part No.	Min. Swg. Induc.	D.C. Res. In Ohms	Approx. Range of Induc. at DCMA	R.M.S. V. Insul.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
f	C-1718	10 hy.	130	13.5-3.5 hy. at 15-150	2000	C	3 3/8	2 5/8 x 2 1/2	2 x 1 1/8	2.3
	C-1400	10 hy.	100	12-2 at 17.5-175	3000	C	3 3/8	2 5/8 x 2 3/8	2 x 1 11/16	2.4
	C-1401	10 hy.	80	12-2 at 20-200	3000	C	3 3/8	3 x 3 1/8	2 1/4 x 2 1/8	3.5
	C-1645	10 hy.	90	12-2 at 20-200	5000	C	4	3 1/4 x 3 3/8	2 1/2 x 2 3/8	4.5
	C-1702	10 hy.	60	12-2 at 25-250	3000	BV	3 1/2	2 1/8 x 3 3/8	2 1/4 x 2 1/2	4.3
g	C-1402	10 hy.	60	12-2 at 25-250	3000	C	3 3/8	3 x 3 1/2	2 1/4 x 2 3/8	4.3
	C-1720	16 hy.	80	20-4 at 30-300	3000	NV	4 3/8	3 3/4 x 3 1/2	3 x 2 1/2	7.2
	C-2307	16 hy.	80	20-4 at 30-300	3000	C	4 3/4	4 x 3 3/8	3 x 2 13/16	7.9
	C-1403	16 hy.	80	20-4 at 30-300	5000	D	4 3/4	4 x 4 1/8	3 x 2 13/16	7.7
	C-1404	14 hy.	60	17-3 at 40-400	5000	D	4 3/4	4 x 5 1/8	3 x 3 13/16	11.7
	C-1405	12 hy.	75	16-4 at 50-500	7500	FS-1	7 1/8	5 5/8 x 5 1/2	4 5/8 x 3 3/8	24.3

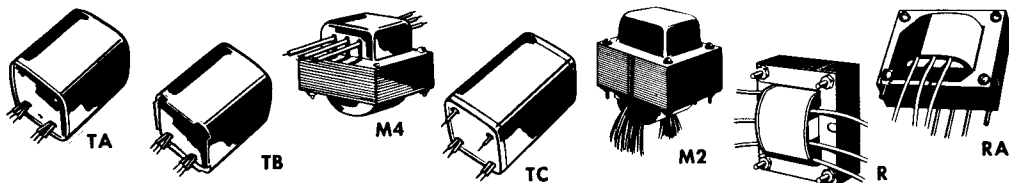

SMOOTHING CHOKES

Inductance varies with the amount of D.C. flowing through the coil. Therefore these units have been tested under uniform conditions. Filter chokes are rated at 10 volts, 60 cycles,

For Use In A.C.-D.C. Power Supplies

with maximum D.C. in winding. Tolerance of minus 15%, plus 50% is maintained on all inductance ratings.

Part No.	Rating Induc. at DCMA	D.C. Res. In Ohms	R.M.S. V. Insul.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
a C-1080	3.5 hy. at 50 ma.	200	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7
C-1325	5.0 hy. at 50 ma.	250	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7
C-1277	7.0 hy. at 50 ma.	300	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7
C-1723	4.5 hy. at 50 ma.	325	1500	A	1 1/8	2 3/8 x 1 1/2	2	0.4
C-1227	7.0 hy. at 50 ma.	350	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7
C-1279	8.5 hy. at 50 ma.	400	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7
C-1333	8.0 hy. at 50 ma.	450	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7
C-1215	9.0 hy. at 50 ma.	500	1500	A	1 1/8	2 3/8 x 1 1/2	2 3/8	0.7

AUTO RADIO VIBRATOR TRANSFORMERS

Exact Duplicate For 6 Volt D.C. Primary

Part No.	Original Part No.	Trade Name	D.C. Volts at Filter Input	D.C. M.A.	Mtg. Type	Recommended Buffer Cap. (mfd.)	Height Overall	Base Area	Shpg. Wt. In Lbs.
b P-4064	7240519	United Motors (Delco)	280	65	TA	0.015-0.015	4 1/16	2 3/8 x 2 3/2	2.6
P-4065	7255881	United Motors (Delco)	265	56	TC	0.006	3 3/16	2 3/16 x 2 3/16	2.5
P-6470	140-111	Regal (5-tube univ. series)	145	50	TD	0.009	2 11/16	2 11/16 x 2 3/16	1.4
P-6471	25B472533	Motorola (408, 508, etc.)	235	70	TA	0.006	3	2 3/8 x 2 3/16	2.0
P-6472	D 71014	Colonial-Detrola No. 8072							
	C 217020	Colonial-Bendix M1	270	56	TA	0.007	2 5/8	2 27/32 x 2 3/32	2.0
	C 71014	Colonial-Motorola							
	25B70950	Motorola (405, 505, etc.)							
c P-6473	95-1073	Zenith	272	73	TA	0.008	3 1/2	2 3/8 x 2 1/2	2.4
P-6474	95-1066	Zenith	240	52.5	TA	0.008	3 1/2	2 3/8 x 2 1/2	2.2
P-6476	D70267	Colonial-Detrola No. 7070	220	53.5	TA	0.008	2 3/8	2 27/32 x 2 3/32	2.0
	C70267	Col.-Mot.-Det. No. 8030							
P-6477	25C500189	Motorola	150	50	M2	0.03	2	1 7/8 x 2 1/4	1.0
P-6478	25C501644	Motorola	225	70	R	0.02	2 1/4	2 3/16 x 2 3/8	1.5
P-6479	65-0358	Philco	260	60	RA	0.005	2 1/2	2 3/8 x 3	2.3
P-6480	65-0347	Philco	225	70	RA	0.0033	2 3/16	2 1/4 x 2 5/8	1.5
d P-6481	32-8313-1	Philco	250	60	M4	0.0068	2 1/4	2 3/16 x 2 3/8	1.5
P-6483	VE-169	Farnsworth	240	50	TB	0.006	3 1/16	2 1/2 x 2 3/8	2.5
P-6484	25B70950-E	Motorola	265	70	TA	0.007	3 1/16	2 1/2 x 2 3/8	2.5
P-6485	95-1071	Zenith	240	70	TA	0.008	3 1/16	2 1/2 x 2 3/8	2.5
P-6486	25C472586-C	Motorola	240	80	TA	0.007	3 1/4	2 7/8 x 2 3/4	3.5
P-6487	25B-23103	Motorola	170	60	TA	0.007	2 11/16	2 3/16 x 2 3/32	1.8
P-6488	25C521454	Motorola	225	50	TB	0.007	2 7/8	2 3/16 x 2 3/8	2.0
P-6490	C 291787-1	Bendix (Ford Model 5B8F)	265	52	R	0.006	2 1/8	2 3/16 x 2 3/8	1.5
P-6499	1220163 ¹	United Motors (Delco)	250	60	TC	0.006	3 3/32	2 3/8 x 2 1/2	2.3

Exact Duplicate For 12 Volt D.C. Primary

e P-6482	6064	United Motors (Delco)	250	60	TC	.004	3 1/4	2 11/16 x 2 11/16	2.5
P-6489	6067	United Motors (Delco)	250	60	R	.004	2 3/16	2 3/16 x 2 3/8	2.0
P-6493	*25C535794	Motorola	275	75	S1	(See Footnote)	2 3/4	2 3/8 x 2	1.7
P-6494	32-8592-1	Philco	245	70	RA	0.0047	2 3/16	2 3/8 x 2 1/8	1.5
P-6495	*25K535795	Motorola	275	75	S1♦	(See Footnote)	2 3/4	2 3/8 x 2 1/8	1.7
P-6497	7265604 ²	United Motors (Delco)	250	55	S2	.007 ³	2 1/16	2 1/4 x 2	1.8

*2 buffer capacitors used 0.5 mfd. and 0.04 mfd. as in original circuit.

♦Identical to S1 but has half shell.

¹7261386 and 7262956 replaced by P-6499

²7269118 replaced by P-6497


³+15K-IW. Res.

VIBRATOR TRANSFORMERS

With 6 Volt D.C. Primary

Part No.	Secondary A.C. Volts	D.C. Volts *At Filter Input	D.C. M.A.	Recom-mended Buffer Cap.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
f P-6301	210-0-210	150	40	0.008 mfd.	S	2 3/8	2 7/8 x 1 3/4	2 3/8	1.2
P-6491	188-0-188	200	40	0.003 mfd.	S	2 1/4	3 1/8 x 2 1/8	2 13/16	1.5
P-4060	240-0-240	225	40	0.008 mfd.	NV	3 1/8	2 1/2 x 2 3/8	2 x 2	2.5
P-4061	290-0-290	250	50	0.006 mfd.	NV	3 1/8	2 1/2 x 2 3/8	2 x 2	2.5
P-4062	300-0-300	260	65	0.006 mfd.	NV	3 1/8	2 1/2 x 2 3/8	2 x 2	2.3
P-4063	320-0-320	285	75	0.006 mfd.	NV	3 1/8	2 1/2 x 2 3/4	2 x 2 1/4	2.8
P-6131	370-0-370	330	100	0.007 mfd.	NV	3 1/2	2 7/8 x 2 7/8	2 1/4 x 2 1/4	3.5

*When used with a synchronous vibrator.

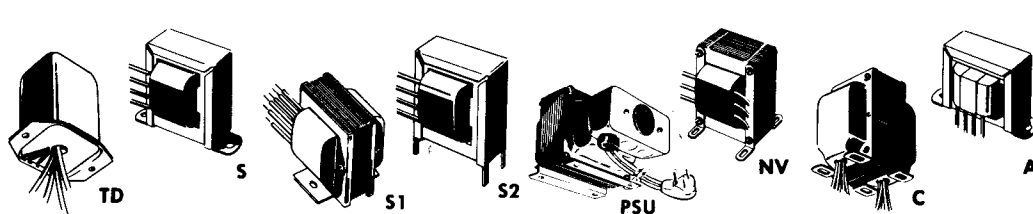

power



VIBRATOR TRANSFORMERS—Continued

With 6 Volt D.C. and 117 Volt A.C. Primaries

Part No.	Secondary A.C. Volts	D.C. Volts *At Filter Input	D.C. M.A.	Recom- mended Buffer Cap.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6166	350-0-350 Filament—6.3 volts at 2.25 Amps.	—	135	0.01 mfd.	C	4¾	4 x 3¾	3 x 2⅝	6.9

a With 12 Volt D.C. and 117 Volt A.C. Primaries

P-6496	350-0-350 Filament—12.6 volts C.T. @ 2 Amps.	—	100	.005 mfd.	C	4½	3¾ x 4	3 x 3	7.9
--------	---	---	-----	-----------	---	----	--------	-------	-----

*When used with a synchronous vibrator.

SPEAKER FIELD SUPPLY TRANSFORMER

Part No.	Plate Supply A.C. Volts	D.C. M.A.	Rectifier Volts	Filament Amperes	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6146	120-0-120	250	5.0	3.0	C	4	3¼ x 3⅛	2½ x 1⅝	4.2

CONDENSER TESTER POWER TRANSFORMER§

Part No.	Plate Supply A.C. Volts	D.C.M.A.	Filament Windings Volts	Amps.	Overall Dimensions	Mounting Type	Shpg. Wt. In Lbs.
P-6459§	550 55	30 60	6.3 6.3	0.9 0.6	L W D 2⅝ 2⅝ 2¼	R	1.4

§Exact replacement for Solar model CF-160. Use original mounting brackets.

CATHODE RAY TUBE POWER TRANSFORMERS

For Use With Type 2X2 Rectifier Tubes In a Conventional Half-Wave High Voltage Supply

Part No.	Plate Supply A.C. Volts	DCMA	Rectifier Volts	Filament Amps.	Other Volts	Windings Amps.	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-8150	1,550 half-wave	1.5	2.5	1.75	—	—	TD	3⅞	3 x 2½	2⅞ x 1¾	1.8
P-8151	2,400 half-wave	5.0	2.5	2.0	2.5	2.0	C	4⅞	3⅞ x 3⅞	2¾ x 2⅞	6.4
•P-8178	1,800 half-wave	2.0	2.5	1.8	2.5	2.2	C	3⅞	3¾ x 3¼	2½ x 2½	5.0
					6.3	0.6	or				

•New Part Number

PHOTOFLASH TRANSFORMERS

See Stancor Bulletin 470 For Electronic Flash Circuit and Parts List

Part No.	Application	Primary	Secondary	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6425	Power transformer for AC powered electronic flash circuits.	105/115/125V. 60 cy.	Charges up to 1050 mfd. to 450 Volts D.C.	S	2⅝	2⅞ x 2	2⅝	1.4
P-6426	Trigger coil for use with 450V flashtube. Replaces GE 86G41; length ¾", diameter ⅝"							0.2

STEPUP-STEPDOWN AUTOTRANSFORMERS

60 Cycle Operation, 208V/230V, 230V/208V

Especially designed for use with air conditioners in converting a 208 volt unit to a 230 volt line. Converting from 230 volt unit to a 208 volt line

is accomplished by a simple change of connections inside the outlet box.

Part No.	Application	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. (Lbs.)
PSU-2000	2.3 KVA for air conditioners using ½ to 1 hp motors	3½	3¾ x 6½	2⅞ x 3¼	PSU	9
PSU-3000	3 KVA for air conditioners using 1 to 2 hp motors	4	4½ x 6	2½ x 3¾	PSU	10


All Primary Windings are for 117V-60 cycle operation unless otherwise indicated.




isolation power




K2




J



BV



TE



KC



WC

AUTOTRANSFORMERS

RMS Test Insulation—1500 V.

Part No.	Wattage	Primary 50/60 Cycle	Secondary	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6287	40	230	115	K-2	3½	2½ x 2½	2 x 1½	2.2
P-5062	80	230	115	K	3½	3 x 3¼	2¼ x 2½	3.8
P-5063	100	230	115	K	4	3¼ x 3¼	2½ x 2½	4.5
P-5064	150	230	115	K	4½	3½ x 3½	2¾ x 2½	5.2
P-5065	300	230	115	K	4¾	4 x 4½	3 x 3½	8.8
P-6141	500	230	115	K	4¾	4 x 5½	3 x 4½	13.7
P-6124	1000	230	115	FK	7½	5½ x 6¾	4½ x 4	24.5
P-6299§	150	115	150/140/130/120/ 110/100/90	KA	4	3¼ x 4¾	2½ x 2½	6.0

§Testing Autotransformers—Designed especially for various service and test applications. Incorporates a convenient tap switch to permit variable voltages from 90 to 150 volts. It may be used to apply an overload voltage to amplifiers, radio receivers, or other electronic devices being serviced, which will indicate and cause suspected parts to break down.

LINE ADJUSTING AUTOTRANSFORMERS

RMS Test Insulation—1500 V.

Stancor Volt Adjusters permit operation of electrical devices at 115 volts when the supplied voltage is 65, 75, 90, 100, 115, 130 or 145. They are also useful for alternating at 115 volt line above or below that level. The line adjuster input is correctable in seven steps by means of a

selector switch and is accurately indicated by an output voltmeter. The meter has a convenient red-line marker at 115 volts on a 150 volt scale. Output receptacle is permanently connected to 115 volt tap. All have type PV mounting.

Part No. & Mtg. Type	VA†	Input Voltage 50/60 Cycle	Nominal Output Voltage	Height	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
PV6441	150	65/75/90/100/115/130/145	115	5½	3½ x 5½	3 x 4½	6.4
PV6442	350	65/75/90/100/115/130/145	115	5½	3½ x 6½	3 x 5½	10.5
PV6443	500	65/75/90/100/115/130/145	115	5½	3½ x 6½	3 x 5½	15.0
PV6444	750	65/75/90/100/115/130/145	115	6½	4½ x 8½	3½ x 6½	19.0

†Watts to pure resistive load. To other types of loads, multiply rating of line adjuster by power factor of load for actual wattage.

STRAIGHT ISOLATION*

RMS Test Insulation—1500 V.

Part No.	Wattage	Primary 50/60 Cycle	Secondary	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6410	50	115	115	K	3½	2½ x 3½	2¼ x 1½	3.7
P-6160	100	125/115/105	115	KA	4¾	4 x 3½	3 x 2½	7.0
P-6161	250	125/115/105	115	KA	4¾	4 x 5½	3 x 4½	14.2
P-6298	500	125/115/105	115	KA	7¾	6½ x 7¾	4½ x 4¼	28.0
P-6125	1000	125/115/105	115	FK	7¾	5½ x 7¾	4½ x 5	34.8
P-6123	1500	125/115/105	115	FK	7¾	5½ x 9	4½ x 6¼	49.8
P-6371†	175	117	117	TE	5½	4½ x 5¼	2½ x 4¾	9

†Specifically designed for AC-DC Portable TV Receivers.

*Built-in Electrostatic Shields are grounded to core internally.

STEP-DOWN ISOLATION*

RMS Test Insulation—1500 V.

Part No.	Wattage	Primary 50/60 Cycle	Secondary	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6383	100	250/230/210	115	KA	4¾	4 x 3¾	3 x 2½	7.3
P-6385	250	250/230/210	115	KA	4¾	4 x 5½	3 x 4½	14.2
P-6387	500	250/230/210	115	KA	7¾	5½ x 7½	4½ x 4¼	29.5
P-6389	1000	250/230/210	115	FK	7¾	5½ x 8	4½ x 5	33.8
P-6390	1500	250/230/210	115	FK	7¾	5½ x 9¾	4½ x 6½	50.3

*Built-in Electrostatic Shields are grounded to core internally.

ISOLATION TESTING TRANSFORMER *

RMS Test Insulation—1500 V.

Large enough to handle almost any television or radio receiver on test. Has three standard receptacles, providing output voltage of 105,

115 and 125, with 117 volts, AC, from the line for testing purposes or for correction of high or low line voltage. Has electrostatic shield.

Part No.	Wattage	Primary 50/60 Cycle	Secondary	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
P-6415	350	117	105/115/125	KC	5¾	4½ x 5¾	3½ x 3¾	17.0

*Built-in Electrostatic Shields are grounded to core internally.

AUTOMATION CONTROL TRANSFORMERS

Stancor Part No.	Primary	Secondary Parallel	Series	VA Rating	Mtg. Type	Height Overall	Base Area	Mtg. Ctrs.	Shpg. Wt. In Lbs.
•P-6375	115V/230V 50/60 CPS on all	6V @ 2A	12V @ 1A	12	J	2¾	2½ x 1¾	2¾	1
•P-6376		6V @ 4A	12V @ 2A	24	J	3¾	3½ x 2	2½	1½
•P-6377		12V @ 4A	24V @ 2A	48	J	3½	3½ x 2½	3½	2½
•P-6378		12V @ 8A	24V @ 4A	96	BV	3½	2½ x 3	2¼ x 2¼	4¼
•P-6379		12V @ 16A	24V @ 8A	192	BV	4½	3¾ x 3½	3 x 2¾	8

•New Part Number.



television



DEFLECTION YOKES

All Stancor deflection yokes have ferrite cores and cosine wound distributed windings for anti-astigmatic focusing. Most units have networks and extra long leads. All yokes

have molded coil forms that automatically orient the coils to provide a minimum of "crosstalk." Shipping weight 1.0 lbs.

	Part No.	Coil Inductance in MH		Coil Resistance in Ohms		Max. Scan.	Case Diam.	Unit Length	Mtg. Type	Application
		Horizontal	Vertical	Horizontal	Vertical					
a	DY-1A	8.3	50	13.5	66	53°	3 1/8	3	DY	Multi-Purpose
	DY-2A	10.3	50	14.5	66	70°	3 1/8	2 3/4	DY	Multi-Purpose
	DY-8A	8.5	50	14.5	52.5	70°	3 1/8	2 3/4	DY	Multi-Purpose
	DY-9A	13.5	50	17.5	53.5	70°	3 1/8	2 3/4	DY	Multi-Purpose
	DY-10A	30.0	3.5	45	3.5	70°	3 1/8	2 3/4	DY	Multi-Purpose
	DY-11A	20.0	50	31	50	70°	3 1/8	2 3/4	DY	Multi-Purpose
	DY-12A	30.0	50	41	50	70°	3 1/8	2 3/4	DY	Multi-Purpose
b	DY-13A	12.5	48	15	52	90°	3 1/2	3	DY	Muntz
	DY-14A	30.0	3.5	45	3.5	70°	3 1/8	2 3/4	DY	RCA
	DY-15A	25.0	40.0	35	50	70°	3 1/8	2 3/4	DY	Motorola
	DY-16A	20	44.0	26	45	90°	3 1/8	3 1/8	DY	Multi-Purpose
	DY-17A	12.0	42.0	20	43	90°	3 3/4	3	DY	G. E.
	DY-18A	14.5	41.5	18	50	70°	3 1/4	3 1/4	DY	Sylvania
	DY-19A	20.0	41.5	28	50	70°	3 1/4	3 1/4	DY	Sylvania
c	DY-20A	20.0	41.5	28	50	70°	3 1/4	3 1/4	DY	Sylvania
	DY-21A	14.5	3.1	10	3.5	70°	3 1/8	2 7/8	DY	RCA
	DY-22A	20	46.0	25	45	70°	3 1/8	2 7/8	DY	Hoffman
	DY-23A	20.0	45.0	27	43	90°	3 3/8	3 3/8	DY	RCA
	DY-24A	18.5	11.0	34	11.5	90°	4	2 3/4	DY	RCA
	DY-25A	24.0	11.0	46	11.0	90°	4	2 3/4	DY	Emerson
	DY-26A	19.0	11.5	34	16.5	110°	4 1/4	2 1/4	DY	RCA
	DY-27A	17.5	12.3	35.5	13.5	110°	4 1/4	2 1/4	DY	RCA
d	DY-28A	24	3.2	36	3.4	70°	3 1/4	2 7/8	DY	Motorola
	DY-29A	24	3.2	36	3.4	70°	3 1/4	2 7/8	DY	Motorola
	DY-30A	24	3.2	36	3.4	70°	3 1/4	2 7/8	DY	Motorola
	DY-31A	24	42	44.2	42	90°	4 1/4	3 1/4	DY	Motorola
	DY-32A	24	42	34	42	90°	4 1/8	3 1/4	DY	Motorola
	DY-33A	30.5	43	34	50	70°	3 3/4	2 1/2	DY	Philco
	DY-34A	30	47	45	42	90°	3 3/4	2 3/4	DY	Philco
e	DY-35A	20	45	28	45	90°	4	3	DY	Philco
	DY-36A	24	40	43	37	90°	3 1/2	4	DY	Emerson
	DY-37A	20	45	28	45	90°	4	3 1/4	DY	Emerson
	DY-38A	20	34.4	38	34	110°	4 1/4	3 3/4	DY	Emerson
	DY-39A	13	40	22	41	90°	4	3 1/4	DY	Zenith
	DY-40A	12	40	17	39	110°	4 1/4	3 3/4	DY	G. E.
	DY-41A	13.3	41	20	54	70°	3 1/4	3	DY	RCA
f	DY-42A	30.4	34	47.2	34	110°	4 1/4	3 3/4	DY	RCA
	DY-43A	24	3.3	31	3	90°	4	3	DY	Motorola
	DY-44A	18.5	34	33	34	110°	4 1/4	2 1/8	DY	Westinghouse
	DY-45A	18.6	14.8	35	13.8*	110°	4 1/4	3 3/4	DY	Admiral
	DY-46A	20	40	38	39	110°	4 1/4	3 3/4	DY	Olympic
	DY-47A	8.2	41	19.7	72	70°	3 1/2	2 1/2	DY	G. E.
	DY-48A	14	29	33	60	70°	3 1/2	2 1/2	DY	G. E.
g	DY-49A	44	38	110	80	70°	3 3/8	2 7/8	DY	G. E.
	DY-50A	12	33	28	83	70°	3 3/8	2 3/8	DY	G. E.
	DY-51A	20	45	28	45	90°	4	3	DY	Philco
	DY-52A	24	40	43	37	90°	3 1/2	4	DY	Emerson
	DY-53A	20	45	28	45	90°	4	3 1/4	DY	Emerson
	DY-54A	20	34.4	38	34	110°	4 1/4	3 3/4	DY	Emerson
	DY-55A	13	40	22	41	90°	4	3 1/4	DY	Zenith
h	DY-56A	12	40	17	39	110°	4 1/4	3 3/4	DY	G. E.
	DY-57A	13.3	41	20	54	70°	3 1/4	3	DY	RCA
	DY-58A	30.4	34	47.2	34	110°	4 1/4	3 3/4	DY	RCA
	DY-59A	24	3.3	31	3	90°	4	3	DY	Motorola
	DY-60A	18.5	34	33	34	110°	4 1/4	2 1/8	DY	Westinghouse
	DY-61A	18.6	14.8	35	13.8*	110°	4 1/4	3 3/4	DY	Admiral
	DY-62A	20	40	38	39	110°	4 1/4	3 3/4	DY	Olympic

*New Part Number.

*Includes Thermistor between Vertical Coils.

WIDTH AND LINEARITY CONTROLS

Width and Linearity controls are available with 2 different mounting hole dimensions except WC-11, 12, 13, 15, 17. Select the mounting hole required 5/16" or 7/16" and specify

the unit required by the listing under the mounting hole dimensions column; prefix the number with WC-.

	Part No.	Mounting Hole		Application	Inductance	Res. In Ohms	AGC Inductance	AGC Res. In Ohms	Mtg. Type	Shpg. Wt. In Lbs.
		5/16"	7/16"							
g	RTC-8628*	—	—	Width Coil or Linearity Coil	2.5-17 mh	24	—	—	WC	0.3
	RTC-8629*	—	—	Width Coil or Linearity Coil	15-60 mh	55	—	—	WC	0.3
	WC-1, A	1	1A	Width Coil	.050-50 mh	0.53	—	—	WC	0.3
	WC-2, A	2	2A	Tapped Linearity Coil	.55-4.6 mh	8.3	—	—	WC	0.3
	WC-4, A	4	4A	Width Coil	0.17-.610 mh	1.0	—	—	WC	0.3
	WC-5, A	5	5A	Width Coil or Linearity Coil	4-39 mh	32	2.7-7.6 mh	19.5	WC	0.3
	WC-6, A	6	6A	Tapped Linearity Coil	1.3-4.1 mh	5.6	—	—	WC	0.3
h	WC-7, A	7	7A	Width Coil	.5-3.5 mh	2.3	—	—	WC	0.3
	WC-8, A	8	8A	Width Coil	1.0-10.0 mh	8.0	—	—	WC	0.3
	WC-9, A	9	9A	Width Coil with Keyed Winding	3.2-9 mh	28.0	.16-.70 mh	1.0	WC	0.3
	WC-10, A	10	10A	Width Coil with AGC	2.6-7.5 mh	12.0	4.0-28 mh	32.0	WC	0.3
	WC-11	—	11	Tapped Width Coil	2.3-11.8 mh	10.0	—	—	WC	0.3
	WC-12	†	†	Width Coil with AGC	4-30 mh	27	.075-80	2	WC	0.3
	WC-13	†	†	Width Coil with AGC	4-30 mh	27	.185-1.82	3	WC	0.3
h	WC-14, A	14	14A	Width Coil	45-215 mh	130	—	—	WC	0.3
	WC-15†	—	15	Width Coil with AGC	3.1-21 mh	18.8	.39-2.4 mh	2.4	WC	0.3
	WC-16, A	16	16A	Width Coil with Tapped AGC	1.5-11 mh	9	9-24	49.5	WC	0.3
	WC-17	—	17	Tapped Width Coil	47-110 mh	175	—	—	WC	0.3
	WC-18, A	18	18A	Width Coil	4-29 mh	29	—	—	WC	0.3

†Shipped without core, use original core.

†1 3/4" Mounting Centers, equipped with slider.

*5/16" or 7/16" Mounting Hole Adapter supplied.



television

COMPLETE STANCOR FLYBACK LINE


Part No.	Applications	Mtg. Type
A-8119	RCA, Arvin, Crosley, Stromberg-Carlson, Westinghouse...	1
A-8127	RCA, Airline, Arvin, Crosley, Hallicrafters, Motorola, Muntz, Sentinel, Silvertone, Stromberg-Carlson, Westinghouse...	1
A-8128	Admiral 79C23-3, 79C28-1; Airline 22E42, Sentinel, Silvertone, Stromberg-Carlson, Dumont, Majestic...	1
A-8129	Muntz TO-0024	1
A-8130	GE 7711	2
A-8131	Capehart, Emerson, Packard-Bell, RCA	3
A-8132	Muntz TO-0031	4
A-8133	Admiral 79C30-1, -3	5
A-8134	Admiral 79C30-2, -4, 79C38-1, 79D38-1	5
A-8135	Admiral 79D41-1, -2	6
A-8136	Philharmonic 80-263, -265, -265-2: Apex, Ambassador, AMC, Brunswick, Pathe, Silvertone	7
A-8137	Hoffman 5035	8
A-8138	Emerson 738079/84	8
A-8139	Emerson 738096, 738100	9
A-8220	Philco 32-8565	10
A-8221	Philco 32-8555	10
A-8222	Philco 32-8533/34	11
A-8223	Philco 32-8572	8
A-8224	Motorola, 24C711265, A, 24C-721290	12
A-8225	Motorola 24K712193	12
A-8226	Motorola 24K721301, -C, -721517C	12
A-8227	Sylvania 241-0003	13
A-8228	Sylvania 241-0005, -0006	13
A-8229	Sylvania 241-0007	13
A-8230	Air King, CBS-Col., Silvertone	14
A-8231	CBS-Col., Silvertone	15
A-8232	Emerson 738067, -68, -69, -73, -74, -75, -82	16
A-8233	RCA 76430, 76795	8
A-8234	RCA 76501	17
A-8235	RCA 75519, 75585, 76381	17
A-8236	Westinghouse V11548-1, -2, -3, -4	18
A-8237	Westinghouse V9904-1, V10213-1	18
A-8238	Westinghouse V10214-1	18
A-8239	Motorola 24K792753, 24K701009	19
A-8240	Muntz TO-0036	4
A-8241	Hallicrafters 55D251; Crosley 157820	20
A-8242	Muntz TO-0028/29	21
A-8243	RCA 77833	17
A-8244	RCA 78201, 78810	22
A-8245	Sentinel, Airline 22E57	23
A-8246	Sentinel, Airline 22E67	23
A-8247	Sentinel, Airline 22E75	12
A-8248	Crosley 154069/-1, 154992/2/3, Hallicrafters	24
A-8249	Dumont 20005021	16
A-8250	Dumont 20004361	15
A-8251	Dumont 20006731	8
A-8252	Arvin, Andrea, Dumont, Hoffman, Kaye-Halbert, Olympic, Packard-Bell, Pacific, Mercury, Silvertone, Stromberg-Carlson, Tech-Master	8
A-8253	Admiral 79D48-1	25
A-8254	Admiral 79C60-1	26
A-8255	Admiral 79C60-2/-3	26
A-8256	GE RTO-101	27
A-8257	GE RTO-104	27
A-8258	GE RTO-125/6/7	28
A-8259	GE RTO-129/30	28
A-8260	GE RTO-109	27
A-8261	Majestic, Muntz C9.253/-1/-2/-E	2
A-8262	GE RTO-131/-141/-146-3	29
A-8263	Crosley, Hallicrafters	20
A-8264	Wells Gardner 53X326, 53X328, -329, -330	30
A-8265	Wells Gardner 53X337, Andrea ST-3051, ST-3056, Conrac, Emerson, 738060, Hallicrafters, 55C180, 55D180, Firestone 53X337	8
A-8266	GE RTO-161	31
A-8267	Zenith S-15911/12, -16566, -17130/140/233/245/265/435/646/767/811/927, -20908	32
A-8268	Zenith S-15015/202, S-15709/10, -16006/191/204/S17244/669/X, -20866	32
A-8269	Zenith S-18487/537/802	33
A-8270	Zenith S-18567, -18990, -19728	33
A-8271	Zenith S-19032	33
A-8272	Zenith S-20993	33
A-8273	Zenith S-19408	62
A-8274	Zenith S-21317	34
A-8275	Zenith S-22130	35
A-8276	Zenith S-22154	35
A-8277	Zenith S-21219	35

Part No.	Applications	Mtg. Type
A-8278	Arvin E-40117	8
A-8279	Arvin E-41024	8
A-8280	Arvin E-42721	8
A-8281	Arvin E-24681	9
A-8282	Arvin E-41852	22
A-8283	CBS-Col. 12000841	8
A-8284	CBS-Col. 12001051	36
A-8285	Capehart 850285E-1	37
A-8287	CBS-Col. PC10161	6
A-8288	GE RTO-149/-1	31
A-8289	GE RTO-151/-3	31
A-8290	GE RTO-166/-5	31
A-8291	Muntz TO-0039	38
A-8292	Admiral 79D65-1	26
A-8293	Magnavox 360593-2	39
A-8294	Magnavox 360606	40
A-8295	Magnavox 360614-1, 360623	40
A-8296	Raytheon 12E25423, 12E25424	41
A-8297	Raytheon 201-19817	30
A-8298	Philco 32-8677, -1, -2	42
A-8299	Raytheon 201-22396, -1 22382, -1	30
HO-250	Raytheon 12E24612-1	41
HO-251	Raytheon 12E23939	41
HO-252	GE RTO-165	43
HO-253	GE RTO-175	44
HO-254	GE RTO-179	43
HO-255	Traveler TVX130, A, 131, 141, 151, 152	8
HO-256	RCA replacement 235T1	8
HO-257	Philco 32-8666-3	42
HO-258	CBS-Columbia 12000751	15
HO-259	Sylvania 241-0011	13
HO-260	Sentinel 22E80/-C	30
HO-261	Hallicrafters 55D285; Hoffman 5191A	20
HO-262	Philco 32-8428/-1/-2	47
HO-263	Philco 32-8634	48
HO-264	Philco 32-8709-1	42
HO-265	Admiral 79C70-1	49
HO-266	Magnavox 360659	50
HO-267	Zenith S-20099	62
HO-268	Zenith S-23049	35
HO-269	Zenith S-22720	35
HO-270	Zenith S-18125	62
HO-271	Zenith S-22451	52
HO-272	RCA 972914-1, 103092	53
HO-273	Airline 53X319, Firestone 53X320, Wells Gardner	30
HO-274	Silvertone T80-326, T80-336	54
HO-275	Hallicrafters 55C156/-E, Silvertone 55C-171	16
HO-276	Philco 32-8624/1	48
HO-277	Philco 32-8465-2, 32-8509/-2	47
HO-278	Philco 32-8695-1	42
HO-279	Magnavox 360632-1	55
HO-280	Motorola 24K739284	56
HO-281	Motorola 24K730902/3, 24K732584, 24K732746/7, 24K733407	24
HO-282	Motorola 24C736487, 24K738699	56
HO-283	Airline, Wells Gardner 53X359A	58
HO-284	Spartan PC-70010, PC-70012	59
HO-285	Hoffman 5158A	58
HO-286	Hoffman 5165	24
HO-287	Hoffman 5144/5/6/8/9/55	60
HO-288	General Electric RTO-196	61
HO-289	RCA 104236, 972440-3	58
HO-290	RCA 104481, 973432-1	53
HO-291	Hoffman 5118A	59
HO-292	Hoffman 5154A	58
HO-293	Motorola 24C736488	56
HO-294	Emerson 738103, 109	9
HO-295	Emerson 738106, 107, 111	9
HO-296	Emerson 738119, 122, 128, 129, 140	58
HO-297	Hallicrafters 55A333, 55C301, 304, 307	50
HO-298	General Electric RTO-207	44
HO-299	General Electric RTO-208	44
HO-300	Wells-Gardner 53X355	38
HO-301	Admiral 79D65-2/4	26
HO-302	Admiral 79D65-3	26
HO-303	Admiral 79D74-1, -2	26
HO-304	Admiral 79D77-2	26
HO-305	Crosley 159947-1, -2	20
HO-306	Bendix NH-265051-1, -2	24
HO-307	Setchell-Carlson T-124	54
HO-308	Setchell-Carlson T-133	18

FLYBACKS (Continued)


Part No.	Applications	Mtg. Type	Part No.	Applications	Mtg. Type
•HO-309	Emerson 738138/A	9	•HO-325	Trav-ler TR-28	45
•HO-310	Emerson 738142	8	•HO-326	Meck, Mirrortone, Scott THC-10021	2
•HO-311	Emerson 738155	38	•HO-327	Sparton PC-70015	27
•HO-312	Emerson 738160	9	•HO-328	Sparton PC-70019	27
•HO-313	Emerson 738162	8	•HO-329	Sparton PC-70022/25	27
•HO-314	Emerson 738169	8	•HO-330	Sparton PC-70036	55
•HO-315	Olympic TR-3599-5	42	•HO-331	Magnavox 320055-1, 320061-1/-3	14
•HO-316	Olympic TR-5598/B	50	•HO-332	Magnavox 360580-1 and 360604-1	27
•HO-317	Admiral 79B/D/E77-6	26	•HO-333	Magnavox 360700-1 and 360700-2	40
•HO-318	Admiral 79B/D/E77-7	26	•HO-334	Magnavox and Sentinel 320811-1	40
•HO-319	Admiral 79D83-1/-2	40	•HO-335	Magnavox 360779-1	40
•HO-320	RCA 103839, Sylvania 241-0046/48	40	•HO-336	Motorola 24C739283	56
•HO-321	RCA 104876 and 106063	53	•HO-337	Silvertone 80-368/390/411	25
•HO-322	RCA 104309 and 106533	22	•HO-338	Raytheon, Airline, Truetone C-201-21025-1	2
•HO-323	Trav-ler TR-24	26	•HO-339	Westinghouse 493V004M02/3/4	49
•HO-324	Trav-ler, AMC, Artone TR-27	42	•HO-340	Westinghouse 493V003M03	9

•New Part Number

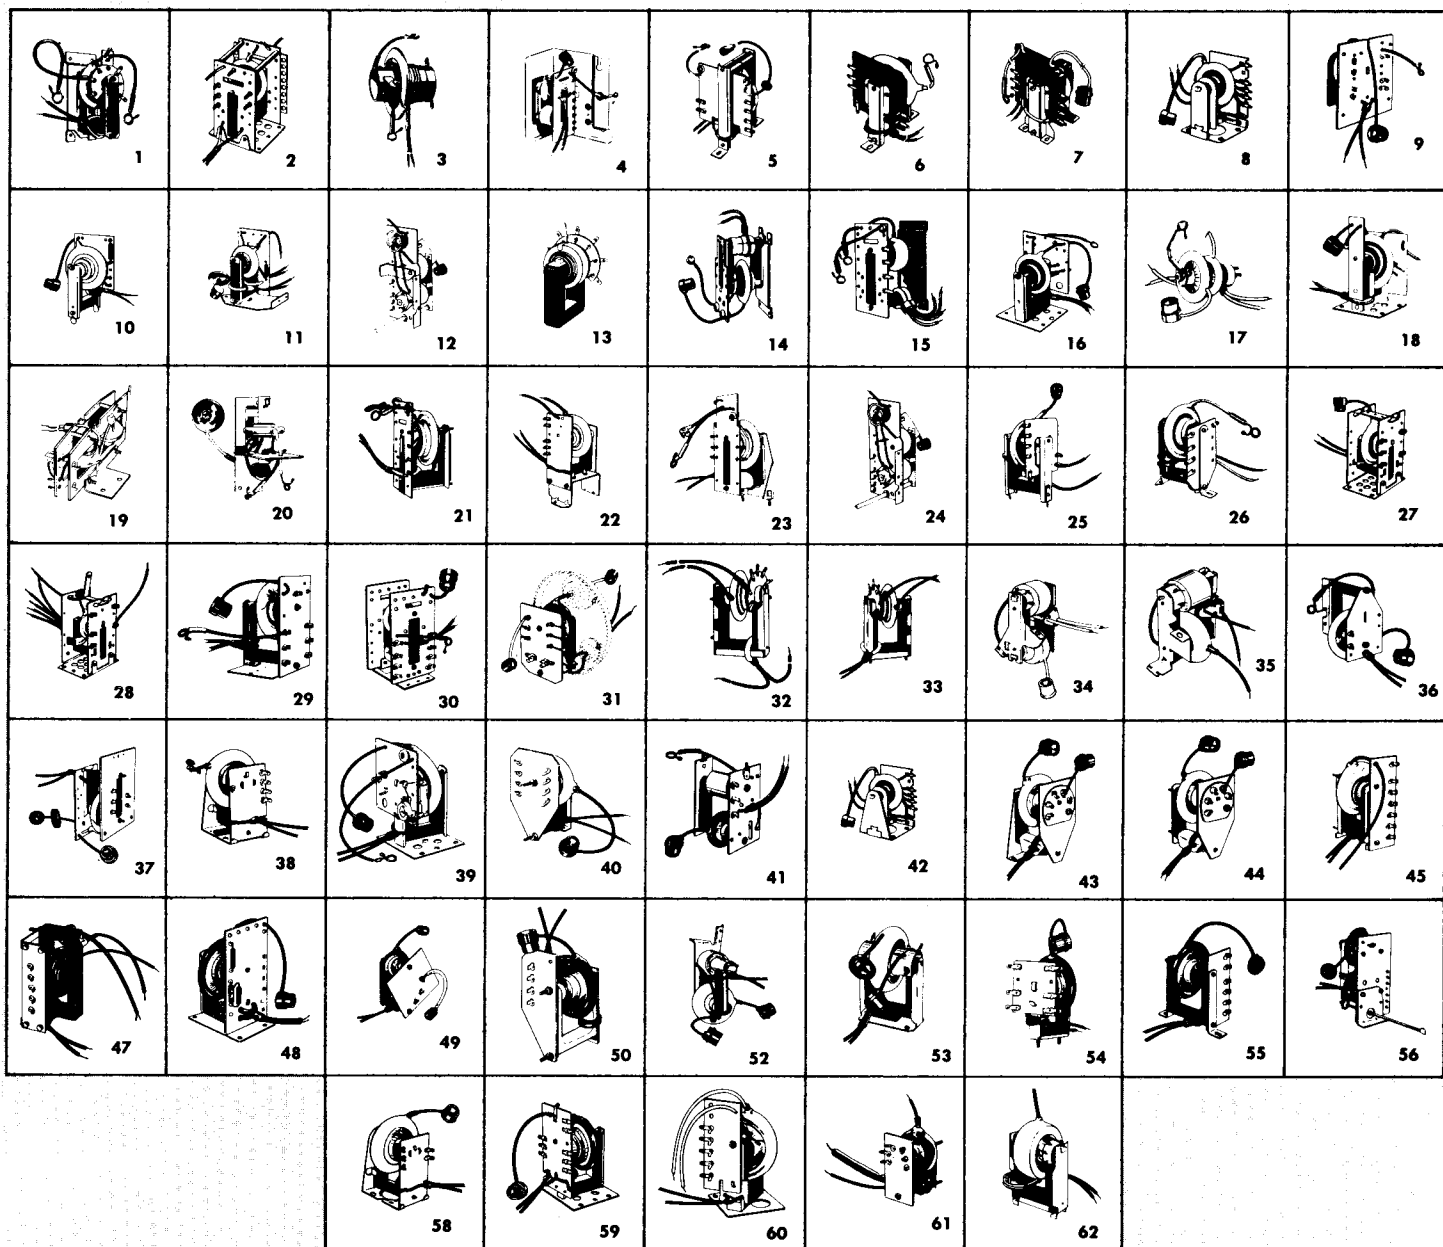





television



M3



C3



M



M5



C4

TV POWER TRANSFORMERS

ALL PRIMARIES FOR 117V, 60 CYCLE OPERATION

	Part No.	Plate Supply AC Volts	DCMA	Max. DCMA#	Rect. Fil. Volts	Amps.	Other Fils. Volts	Amps.	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
a	P-8158	117 ¹	200	—	—	—	6.3 6.3 6.3	4.25 4.0 2.0	3½	3⅞ x 4⅞	2¾ x 3⅞	M†	6.2
	P-8336	117 ¹	280	—	—	—	6.3 6.3 6.3	9.5 0.6 1.2	4¼	3¾ x 4½	3⅞ x 4⅞	M†	8
	P-8168	220-0-220 130-0-130	330 220	—	5.0	3.0	6.3† 6.3† or 12.6 CT†	6.5 6.5 6.5	4⅞	3¾ x 4½	3 x 3¾	M†	10.5
	P-8155	225-0-225	90	105	5.0	2.0	6.3	5.15	3¾	2⅞ x 3⅞	2¼ x 2⅞	M	4.5
	P-8354	260-0-260	325	—	5.0 CT	6.0	6.3	11	5¼	3¾ x 4½	3⅞ x 4⅞	M5†	11
	P-8353	265-0-265	300	—	5.0	6.0	12.6 CT	6.0	5¾	3¾ x 5¼	3 x 4	C3†	12.5
	P-8172	270-0-270	200	240	5.0	3.0	6.3	8.5	4¾	3⅞ x 3¾	2⅞ x 3⅞	M	7
b	P-8334	275-0-275	305	—	5.0	5.0	6.3 6.3	8.5 1.2	5⅞	3¾ x 4½	3⅞ x 4⅞	M†	13
	P-8167	280-0-280	400	450	5.0	6.0	6.3 6.3 6.3	4.5 8.5 7.1	5½	3⅞ x 4¾	3⅞ x 4⅞	M†	13.0
	P-8332	280-0-280	260	—	5.0	5.0	6.3 6.3	1.2 .9	4⅞	3¾ x 4½	3⅞ x 4⅞	M†	11
	P-8352	290-0-290	240	—	5.0	3.0	12.6 CT	5.25	4⅞	3¾ x 4¾	3 x 3½	C†	8.5
	P-8333	295-0-295	225	—	5.0 CT	3.0	6.3 6.3	11.4 .9	4¾	3¾ x 4½	3⅞ x 4⅞	M3†	10
	P-8335	300-0-300	325	—	5.0	6.0	6.3 6.3	8.8 1.5	5⅞	3¾ x 4½	3⅞ x 4⅞	M†	13
	P-8164	300-0-300	225	250	5.0	3.0	6.3	9.0	4⅞	3⅞ x 4⅞	2¾ x 3⅞	M†	7.5
c	P-8331	310-0-310	240	—	5.0	3.0	6.3 6.3	6.4 3.0	4½	3¾ x 4½	3⅞ x 4⅞	M†	9
	P-8337	315-0-315	225	—	5.0	3.0	6.3	8.25	4½	3¾ x 4½	3⅞ x 4⅞	M3	8.5
	P-8338	315-0-315	310	—	5.0	6.0	6.7 6.4	10.0 1.6	5¾	3⅞ x 4¾	3⅞ x 3¾	M†	12.5
	P-8339	325-0-325	255	—	5.0	3.0	12.6 CT	5.25	4⅞	3¾ x 5	3 x 3¾	C†	8.5
	P-5059§	337.5-0-337.5	200	225	5.0 CT	3.0	6.3 CT	5.0	4¾	3¾ x 4¾	3 x 3⅞	C	9.6
	P-8166	340-0-340	330	360	5.0	6.0	6.3† 6.3† or 12.6 CT†	2.5 5.0 5.0	5½	3⅞ x 4¾	3⅞ x 4⅞	M†	13.0
	P-8345	350-0-350	215	—	5.0	3.0	6.3 6.3	9.0 1.2	5	3¾ x 4½	3⅞ x 4⅞	M†	11.5
d	P-8165	350-0-350 220-0-220	180 70	—	5.0	3.0	6.3 6.3	2.0 10.0	4¾	3¾ x 4½	3 x 3¾	M†	11.0
	P-8340	355-0-355	270	—	5.0	6.0	6.3 6.3 6.3	9.5 1.65 2.4	5½	3¾ x 4½	3⅞ x 4⅞	M†	12
	P-8350	350-0-350	270	—	5.0	6.0	5.0 6.3 6.6	2 1.5 7.8	5½	3¾ x 4½	3⅞ x 4⅞	M†	13
	P-8160	360-0-360 165-0-165	185 65	—	5.0	3.0	6.45	12.0	4¼	3¾ x 4½	3 x 3¾	M	9.6
	P-8341	360-0-360 220-0-220	175 110	—	5.0 5.0	3.0 2.0	12.6 CT	5.45	4⅞	3¾ x 4¾	3 x 3½	C†	11
	P-8349	360-0-360	260	—	5.0	6.0	5.0 6.3	2 8.85	5½	3¾ x 4½	3⅞ x 4⅞	M†	13
e	P-8159	360-0-360	250	290	5.0	3.0	5.0 6.3 6.3	2.0 8.0 0.6	5⅞	3⅞ x 4¾	3⅞ x 4⅞	M†	10.0
	P-8351	360-0-360	240	—	5.0	6.0	6.5	9.3	4⅞	3¾ x 4½	3⅞ x 4⅞	M†	10.5
	P-8343	360-0-360 220-0-220	220 110	—	5.0 5.0	3.0 2.0	12.8 CT	5.8	4⅞	3¾ x 5¼	3 x 3⅞	C†	11.5
	P-8344§	365-0-365 200-0-200	170 84	—	5.0 5.0	3.0 2.0	12.6	4.25	4⅞	3¾ x 4½	3 x 3¼	C†	9
	P-8342	365-0-365	260	—	5.0	6.0	6.3 6.3	8.85 1.2	5¾	3¾ x 4½	3⅞ x 4⅞	M†	13


#Loading to maximum DCMA will have no appreciable effect on the service or life of the transformer.

¹For use in voltage doubler circuits.

§Primary for 117/107 volts.

†May be used as 6.3V windings or in series as 12.6V C.T.

‡With copper shorting band to reduce external magnetic field.

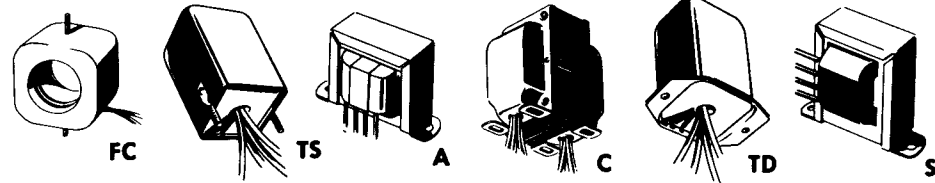

television



TV POWER TRANSFORMERS—Continued ALL PRIMARIES FOR 117V, 60 CYCLE OPERATION

	Part No.	Plate Supply		Max. DCMA#	Rect. Fil.		Other Fils.		Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
		AC Volts	DCMA		Volts	Amps.	Volts	Amps.					
a	P-8156	365-0-365	295	340	5.0	6.0	5.0	2.0	6 3/8	3 13/16 x 4 3/4	3 3/16 x 4 1/16	M ‡	16.5
	P-8348	365-0-365	270	—	5.0	6.0	12.6 CT	5.0	4 7/8	3 3/4 x 4 1/2	3 3/16 x 4 1/16	M ‡	10
	P-8163	370-0-370	190	225	5.0	3.0	6.3	7.75	5 5/8	3 13/16 x 4 3/4	3 3/16 x 4 1/16	M ‡	10.8
	P-6315	370-0-370	275	310	5.0 CT	3.0	6.3 CT	7.0	4 1/4	3 3/4 x 4 1/2	3 x 3 3/4	M	9.3
	PM-8411	375-0-375	150	—	5.0	3.0	6.3 CT	4.5	3 7/8	3 1/2 x 4 1/8	2 3/4 x 3 3/16	M	5.8
	P-8154	375-0-375	205	230	5.0	3.0	5.0	2.0	4 1/4	4 3/4 x 4 1/2	3 x 3 3/4	M	9.1
	P-8171	375-0-375	225	250	5.0 CT	3.0	6.3	2.0	5	3 3/4 x 4 1/2	3 x 3 3/4	M3 ‡	10.5
	P-8162	380-0-380	180	210	5.0 CT	3.0	6.3	9.0	5 1/2	4 1/8 x 3 7/16	2 3/4 x 3 7/16	M3 ‡	9.0
	P-8169	380-0-380	220	250	5.0	3.0	6.3 † 6.3 † or 12.6 CT †	1.2 5.0 7.0	4 5/8	3 3/4 x 4 1/2	3 x 3 3/4	M ‡	10.5
b	P-8170	380-0-380	220	250	5.0	3.0	6.3 6.3 † 6.3 † or 12.6 CT †	1.2 5.0 7.0	4 3/4	4 x 4 3/4	3 x 3 7/16	C ‡	10.5
	P-8347	385-0-385	230	—	5.0	3.0	5 6.45	2 7.4	5 5/8	3 3/4 x 4 1/2	3 3/16 x 4 1/16	M ‡	13
	P-8157	385-0-385 235-0-235	195 105	— —	5.0 5.0	3.0 2.0	6.3 6.3 5.0	7.65 0.6 2.0	4 3/4	3 3/4 x 4 1/2	3 x 3 3/4	M	11.1
	P-8161	385-0-385	230	270	5.0	3.0	6.3	9.0	5 5/8	3 13/16 x 4 3/4	3 3/16 x 4 1/16	M ‡	11.8
	PM-8412	400-0-400	200	—	5.0	3.0	6.3 CT	5.0	3 7/8	3 3/4 x 4 1/2	3 x 3 3/4	M	8.2
	P-8346	400-0-400 330-0-330	180 180	— —	5.0 5.0	3.0 3.0	— —	—	4 3/8	3 3/4 x 4 3/4	3 x 3 1/2	C ‡	11
	•P-8355	285-0-285	250	310	5.0	3.0	6.3	9.5	3 7/16	3 1/8 x 3 3/4	2 1/8 x 1 13/16 or 2 1/2	C4 ‡	6.5
	•P-8356	270-0-270	260	315	5.0	3.0	6.3	8.8	3 3/4	3 1/8 x 3 3/8	2 1/2 x 2 5/8	C ‡	6.5

#Loading to maximum DCMA will have no appreciable effect on the service or life of the transformer.

•New Part Number

†May be used as 6.3V windings or in series as 12.6V C.T. ‡With copper shorting band to reduce external magnetic field.

VERTICAL BLOCKING-OSCILLATOR TRANSFORMERS

	Part No.	Turns Ratio Pri./Sec.	Height Overall	Base Area	Mounting Centers	Mounting Type	Shpg. Wt. In Lbs.
c	A-8111	1:4.2	1 3/8	1 1/2 x 2 1/2	2	A	0.4
	A-8121	1:4.2	1 3/8	1 1/2 x 2 3/16	1 15/16	TD	0.4
	A-8122	1:4.2	1 5/8	1 3/16 x 1 3/16	1 13/64	TS	0.3
	A-8124	Sec. #1, 1:0.48 Sec. #2, 1:1	1 5/8	1 3/8 x 2 7/8	2 3/8	A	0.7
	A-8125	1:4.2	1 3/8	2 3/16 x 1 1/4	1 3/4	A	0.4
	A-8126*	1:1.5	1 3/4	1 1/2 x 2	1 3/4	S	0.5
	VBO-200*	1:1.5	1 3/8	1 1/2 x 2 1/2	2	A	0.5
	VBO-201*	1:3.33	1 5/8	2 3/16 x 1 1/4	1 3/4	A	0.4


*With copper shield band around coil and core.

HORIZONTAL BLOCKING-OSCILLATOR TRANSFORMERS

	Part No.	Turns Ratio Pri./Sec.	Height Overall	Base Area	Mounting Centers	Mounting Type	Shpg. Wt. In Lbs.
d	A-8110	2:1	1 3/8	1 1/2 x 2 1/2	2	A	0.4
	A-8120	2:1	1 3/4	1 1/2 x 2 3/16	1 15/16	TD	0.4

FOCUS COILS

	Part No.	Resistance D.C. Ohms	Max. DCMA	Case Dimensions	Case Depth	Mounting Centers	Mtg. Type	Shpg. Wt. In Lbs.
e	FC-10	247	200	3 11/32 x 3 11/32	1 29/64	Two 8-32 Screws	FC	2.0
	FC-11	470	140	4 3/4 Diameter	1 1/8	2 11/16 Radius 120° Apart	FC	3.2
	FC-12	370	165	3 11/32 x 3 11/32	1 29/64	Two 8-32 Screws	FC	2.0

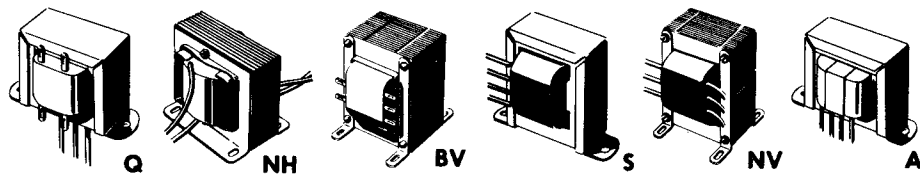

TV FILTER CHOKES

	Part No.	INDUCTANCE			D.C. Res. In Ohms	RMS V. Insul.	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
		At Rated DCMA	At 75% MA	At 115% MA							
a	C-1001	10.5 hy. 110 ma.	11.5 hy.	9.0 hy.	225	3,000	2 5/8	4 x 2 1/4	3 3/16	A	2.3
	C-1080	3.5 hy. 50 ma.	4.0 hy.	2.8 hy.	200	1,500	1 5/8	2 7/8 x 1 1/2	2 3/8	A	0.7
	C-1215	9.0 hy. 50 ma.	10.5 hy.	8.0 hy.	500	1,500	1 5/8	2 7/8 x 1 1/2	2 3/8	A	0.7
	C-1325	5.0 hy. 50 ma.	5.8 hy.	4.2 hy.	250	1,500	1 5/8	2 7/8 x 1 1/2	2 3/8	A	0.7
	C-1410	4.0 hy. 175 ma.	4.7 hy.	3.5 hy.	100	3,000	3 3/16	2 7/8 x 2 5/8	2 x 1 11/16	C	2.4
	C-1411	4.5 hy. 200 ma.	5.5 hy.	3.8 hy.	80	3,000	3 3/8	3 x 3 1/8	2 1/4 x 2	C	3.5
	C-1412	4.0 hy. 250 ma.	4.5 hy.	3.5 hy.	60	3,000	3 5/8	3 x 3 1/2	2 1/4 x 2 3/8	C	4.3
b	C-1646	5.0 hy. 200 ma.	7.0 hy.	3.7 hy.	90	5,000	4	3 1/4 x 3 3/8	2 1/2 x 2 3/16	C	4.5
	C-1703	4.0 hy. 250 ma.	4.5 hy.	3.5 hy.	60	3,000	3 1/2	2 7/8 x 3 3/16	2 1/4 x 2 1/2	BV	4.2
	C-1706	4.5 hy. 50 ma.	5.5 hy.	3.5 hy.	300	1,500	1 5/8	2 7/8 x 1 5/8	2	A	0.4
	C-1707	7.0 hy. 50 ma.	8.5 hy.	5.0 hy.	550	1,500	1 5/8	2 7/8 x 1 5/8	2	A	0.4
	C-1709	9.0 hy. 85 ma.	10.5 hy.	7.5 hy.	250	1,500	2	3 1/4 x 2	2 13/16	A	1.4
	C-1721	8.5 hy. 200 ma.	9.5 hy.	7.5 hy.	120	3,000	3 7/8	3 3/8 x 3	2 1/2 x 2 1/4	NV	4.4
	C-1722	8.0 hy. 300 ma.	8.5 hy.	7.0 hy.	80	3,000	4 5/8	3 3/4 x 3 1/2	3 x 2 1/2	NV	7.3
c	C-2303	2.5 hy. 130 ma.	3.0 hy.	2.1 hy.	100	2,000	2	3 1/4 x 1 3/4	2 13/16	A	1.0
	C-2304	2.3 hy. 150 ma.	2.6 hy.	2.0 hy.	60	1,500	2	3 1/4 x 1 3/4	2 13/16	A	1.0
	C-2309	3.0 hy. 150 ma.	3.6 hy.	2.5 hy.	90	2,000	2 1/4	3 3/4 x 2 1/4	3 1/8	A	1.7
	C-2325	2.0 hy. 200 ma.	2.5 hy.	1.5 hy.	60	1,500	2 1/4	3 3/4 x 2 1/4	3 1/8	A	1.8
	C-2326	1.0 hy. 300 ma.	1.5 hy.	0.6 hy.	43	1,500	2 1/4	3 3/4 x 2 1/4	3 3/8	A	1.7
	C-2327	1.5 hy. 200 ma.	1.7 hy.	1.3 hy.	85	1,500	1 5/8	2 7/8 x 1 1/2	2 3/8	A	0.8
	C-2328	0.8 hy. 375 ma.	1.0 hy.	0.65 hy.	25	1,500	2 1/4	3 3/4 x 2	3 1/8	A	1.5
d	C-2334	2.8 hy. 300 ma.	3.3 hy.	2.2 hy.	60	1,500	2 5/8	2 1/4 x 4	3 3/8	A	2.5
	C-2343	0.75 hy. 300 ma.	0.9 hy.	0.6 hy.	32	1,500	1 5/8	2 7/8 x 1 1/2	2 3/8	A	0.6

• New Part Number.

VERTICAL DEFLECTION OUTPUT TRANSFORMERS

	Part No.	Turns Ratio Pri./Sec.	Primary Impedance#	D.C. Res. In Ohms		Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
				Pri.	Sec.					
d	A-8112	10:1	18,000 Ω @ 12 DCMA	1300	10	2	1 3/4 x 3 1/4	2 13/16	A	1.0
	A-8113	8.8:1	16,500 Ω @ 10 DCMA	700	12	2	1 3/4 x 3 1/4	2 13/16	A	1.0
	A-8115	10:1	19,000 Ω @ 13 DCMA	600	7	3 1/16	2 1/2 x 2 1/2	1 19/32 x 2	NV	2.5
	A-8116	10:1	18,000 Ω @ 10 DCMA	525	7	3 1/16	2 1/4 x 2 1/2	1 19/32 x 1 3/4	NV	2.2
	A-8123§	11.4:1	17,000 Ω @ 20 DCMA	1200	11	2	1 3/4 x 3 1/4	2 13/16	A	1.2
	A-8140	44:1	11,000 Ω @ 20 DCMA	400	0.3	3 1/16	2 1/2 x 2 1/2	1 19/32 x 2	NV	2.5
	A-8141§	18:1	30,000 Ω @ 10 DCMA	1650	4.5	2 1/4	3 3/4 x 2 1/8	3 1/8	A	1.5
	A-8142	8:1	19,000 Ω @ 13 DCMA	540	10.5	2 5/8	2 1/4 x 3	2 3/8 x 1 5/8	NH	2 1/2
	A-8143	10:1	14,000 Ω @ 15 DCMA	625	14	2 1/4	2 1/4 x 3 5/8	3 1/8	A	2
e	A-8144	9:1	9,500 Ω @ 30 DCMA	540	15	2 1/4	1 3/4 x 3 5/8	3 1/8	A	1 1/2
	A-8145	9:1	11,000 Ω @ 19 DCMA	540	14	2 5/8	2 1/4 x 2 1/2	3	N1	2
	A-8146§^	6.9:1	6,000 Ω @ 15 DCMA	375	10	2	1 7/8 x 3 1/4	2 13/16	A	1 1/2
	A-8147§	6:1	4,700 Ω @ 50 DCMA	300	9	2	1 3/4 x 3 1/4	2 13/16	A	1
	A-8148§^	8:1	3,200 Ω @ 40 DCMA	300	9	2	1 3/4 x 3 1/4	2 13/16	A	1
	A-8149§^	8:1	6,000 Ω @ 15 DCMA	375	6.5	2	1 7/8 x 3 1/4	2 13/16	A	1 1/2
	A-8149§	6.9:1	4,700 Ω @ 50 DCMA	375	6.5	2	1 7/8 x 3 1/4	2 13/16	A	1 1/2
	A-8150§	6.9:1	11,500 Ω @ 20 DCMA	330	8.5	2	1 5/8 x 3 1/4	2 13/16	A	1
	A-8151	9:1	11,000 Ω @ 19 DCMA	450	11.3	2	3 3/4 x 2 3/16	3 3/8	N2	1.7
f	VO-100§	9.2:1	8,500 Ω @ 19 DCMA	580	6.7	2 1/4	3 3/4 x 2 1/4	3 1/8	N1	1.7
	VO-101	12:1	7,500 Ω @ 30 DCMA	360	14.0	2 1/8	3 3/8 x 1 7/8	3 1/8	A	1 1/2
	VO-102	6.5:1	16,000 Ω @ 15 DCMA	675	6.8	2 1/4	3 3/8 x 1 3/4	3 1/8	A	1 1/2
	VO-103	16:1	6,700 Ω @ 25 DCMA	275	10	2 5/8	4 x 2 1/4	3 3/8	A	2 1/2
	VO-104	46:1	10,000 Ω @ 15 DCMA	530	5.5	2	3 1/4 x 1 1/2	2 13/16	A	1 1/2
	VO-105§	46:1	15,000 Ω @ 25 DCMA	430	.4	2 5/8	4 x 2 1/8	3 3/8	A	2 1/2
	VO-106	44.5:1	24,000 Ω @ 15 DCMA	740	.8	2	3 1/4 x 1 1/2	2 13/16	A	1 1/2
	VO-107	35.5:1	35,000 Ω @ 0 DCMA	1400	3.8	1 5/8	2 7/8 x 1 1/2	2 3/8	A	1
	VO-108§	32:1	22,000 Ω @ 0 DCMA	1220	3.0	1 5/8	2 7/8 x 1 1/2	2 3/8	A	1
	VO-109	9:1	10,000 Ω @ 25 DCMA	350	10.3	2	3 1/4 x 2	2 13/16	A	1.3
	VO-110	Multi-Ratio 5:1 to 50:1	40 MA Max.	—	—	2	3 1/4 x 2	2 13/16	Q	1.3
	VO-111	16:1	18,000 Ω @ 20 DCMA	1670	7.0	2	2 x 3 1/4	2 13/16	A	1.3
	VO-112	18:1	20,000 Ω @ 20 DCMA	1425	7.5	2	2 x 3 1/2	2 13/16	A	1.3
	VO-113	8:1	7,000 Ω @ 30 DCMA	384	3.5	2 1/4	3 3/8 x 2 1/8	3 1/8	A	1.8
	VO-114	15:1	13,000 Ω @ 20 DCMA	1435	19.7	2 5/8	1 3/4 x 2 13/16	2 3/8	S	1.3
	VO-115	6:1	5,000 Ω @ 30 DCMA	250	6.0	2	3 1/4 x 1 5/8	2 13/16	A	1


#Primary impedance measured at 30 V, 60 cycle.

§Autoformer type.

^Includes winding for vertical blanking.

§Includes screen grid tap.

•New Part Number.

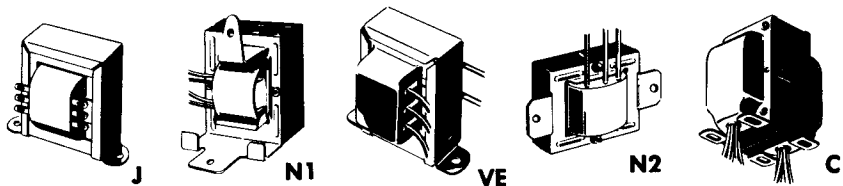

television



TV AUDIO OUTPUT TRANSFORMERS See Page 5 for Complete Listing of Audio Output Transformers

	Part No.	Application	Max. Pri. D.C.	Max. Audio Watts	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
a	A-2313	Single plate, 7,000 ohms, to 8 ohms voice coil	40 ma.	10	2	3 1/4 x 1 3/4	2 13/16	A	1.0
	A-3303	Push-pull plates, 14,000 ohms, to 500 15/8/4 ohms line or voice coil	55 ma.	20	3 3/16	2 3/8 x 2 3/8	2 x 1 11/16	C	2.7
	A-3330	Single plate, 2,000 ohms to 3.5 ohms voice coil	50 ma.	5	1 3/8	2 3/8 x 1 3/8	2	A	0.4
	A-3332	Single plate, 2,000 ohms to 3.2 ohms voice coil	50 ma.	3	1 3/8	2 7/8 x 1	1 3/4	A	0.4
	A-3823	Single or push-pull plates, 4,000-14,000 ohms, to voice coil	40 ma.	8	1 3/8	2 3/8 x 1 1/2	2 3/8	Q	0.7
	A-3824	Single or push-pull plates, 6,000-10,000 ohms, to voice coil	75 ma.	8	2	3 1/4 x 2	2 13/16	Q	1.4
b	A-3825	Single plate, 1,500-4,500 ohms, to voice coil	75 ma.	8	2	3 1/4 x 1 3/8	2 13/16	Q	0.9
	A-3830	Push-pull plates, 3,000-10,000 ohms, to voice coil	60 ma.	20	2 11/16	3 3/16 x 2 1/4	2 13/16	J	1.8
	A-3849	Single plate, 1,500-10,000 ohms, to voice coil	55 ma.	10	1 3/8	2 7/8 x 1 1/2	2 3/8	Q	0.7
	A-3850	Single or push-pull plates, 4,000-14,000 ohms to voice coil	40 ma.	8	2	2 3/8 x 1 1/2	2	J	0.7
	A-3852	Push-pull plates, 4,000-14,000 ohms, to voice coil	40 ma.	18	2 5/8	2 7/8 x 2	2 3/8	J	1.3
	A-3856	Single or push-pull plates, 4,000-14,000 ohms, to voice coil	35 ma.	4	1 3/8	2 3/8 x 1 3/8	2	Q	0.4
c	A-3870	Push-pull plates, 4,000-14,000 ohms, to voice coil	50 ma. ea. 1/2	18	2	3 1/4 x 2	2 13/16	Q	1.3
	A-3876	Single plate, 2,000 ohms to 4 ohm voice coil	60 ma.	5	1 3/8	2 3/8 x 1 3/8	2	A	0.4
	A-3877	Single plate, 5,000 ohms, to 4 ohm voice coil	40 ma.	5	1 3/8	2 3/8 x 1 3/8	2	A	0.4
	A-3878	Single plate, 7,000 ohms, to 4 ohm voice coil	30 ma.	5	1 3/8	2 3/8 x 1 3/8	2	A	0.4
	A-3879	Single plate, 10,000 ohms, to 4 ohm voice coil	30 ma.	5	1 3/8	2 3/8 x 1 3/8	2	A	0.4
	A-3880	Push-pull plates, 4,000-14,000 ohms to voice coil	40 ma.	15	2 1/4	3 3/4 x 2 1/4	3 1/8	Q	1.7
	A-8114	Single plate, 7,600 ohms, to 3.2 ohm voice coil	32 ma.	5	1 3/8	2 3/8 x 1 3/8	2	A	0.4

TV FILAMENT TRANSFORMERS See pages 16 & 17 for Complete Listing of Filament Transformers


	Part No.	Secondary Volts	Amps.	Rms V. Insul.	Primary Volts	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
d	P-3064†	6.3 CT	6.0	2,500	117	3 1/8	2 1/2 x 2 7/8	2 x 2	BV	2.4
	P-6134	6.3 CT	1.2	3,000	117	1 3/8	2 3/4 x 1 3/4	2 3/8	A	0.8
	P-6308†	6.3 CT	10.0	2,500	117/107	3 1/2	2 3/8 x 2 7/8	2 1/4 x 2 1/8	NV	3.4
	P-8190	6.3	1.2	5,000	117	2	3 1/4 x 1 3/4	2 13/16	A	1.0
	P-8191	6.3	1.2	5,000	6.3	2	3 1/4 x 1 3/4	2 13/16	A	1.0

†Has electrostatic shield.

TV BOOSTER TRANSFORMER

	Part No.	Plate Supply AC Volts	DC MA	Filament Volts	Amps.	Height Overall	Base Area	Mtg. Ctrs.	Mtg. Type	Shpg. Wt. In Lbs.
e	P-8181	150 half wave	25	6.3	0.5	2	2 7/8 x 1 3/4	2	VE	0.8

STANCOR CR TUBE BOOSTER, P-8192



- No connections to solder.
- HI-LO switch provides two levels of brilliance.
- Does not require AC line connections.
- Measures only 3 1/2" high, 1 1/2" in diameter.
- Does not change CR tube space requirements.

Adds months to the useful life of any dim electro-magnetic deflection CR tube—regardless of size—where dimming is due to low cathode emission. Installs in seconds. Just remove the CR tube connector and attach it to the booster. Then attach the connector plug of booster to the tube. If there is insufficient brilliance on "LO," flip the switch to "HI."

15" leads between the booster and the connector plug permit mounting anywhere in the set. Supplied with mounting bracket and screws. Shipping weight 0.5 pounds.

STANCOR LIST PRICES

Effective: May 1961 (Subject to change without notice)

Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price	Stancor No.	List Price
A-52C...	\$ 3.75	A-4292...	\$ 3.78	A-8115...	\$ 8.92	A-8265...	\$12.87	C-2309...	\$ 4.27	HO-256...	\$11.00	HO-336...	\$10.93	P-6333...	\$15.71	P-8041...	\$26.72
A-53...	3.36	A-4350...	7.22	A-8116...	8.90	A-8266...	10.50	C-2317...	9.29	HO-257...	12.70	HO-337...	7.31	P-6338...	12.65	P-8042...	35.86
A-53C...	4.00	A-4351...	7.71	A-8119...	11.90	A-8267...	12.00	C-2318...	3.05	HO-258...	11.93	HO-338...	16.25	P-6348...	9.30	P-8043...	132.61
A-62C...	3.89	A-4352...	8.00	A-8120...	5.73	A-8268...	12.00	C-2325...	4.75	HO-259...	11.10	HO-339...	16.00	P-6358...	9.93	P-8044...	76.39
A-63C...	4.50	A-4407...	14.98	A-8121...	4.40	A-8269...	12.00	C-2326...	4.83	HO-260...	12.93	HO-340...	15.80	P-6371...	32.24	P-8130...	5.72
A-64C...	4.05	A-4420...	3.35	A-8122...	6.51	A-8270...	11.10	C-2327...	3.00	HO-261...	11.29	P-1834-3	16.87	P-6375...	5.56	P-8150...	15.00
A-73C...	5.25	A-4430...	3.80	A-8123...	4.95	A-8271...	11.10	C-2328...	6.00	HO-262...	14.23	P-3020...	16.59	P-6376...	6.31	P-8151...	19.77
A-2203...	4.11	A-4431...	3.10	A-8124...	4.61	A-8272...	11.10	C-2332-1	17.60	HO-263...	14.18	P-3024...	8.33	P-6377...	7.98	P-8154...	25.00
A-2312...	4.75	A-4432...	4.10	A-8125...	3.25	A-8273...	11.10	C-2334...	5.89	HO-264...	11.10	P-3026...	8.33	P-6378...	12.87	P-8155...	13.09
A-2313...	4.25	A-4701...	10.66	A-8126...	3.30	A-8274...	13.34	C-2335...	8.16	HO-265...	9.92	P-3060...	11.20	P-6379...	22.21	P-8156...	35.89
A-2555...	6.26	A-4702...	8.16	A-8127...	11.70	A-8275...	11.40	C-2340...	57.02	HO-266...	11.10	P-3062...	8.56	P-6383...	24.36	P-8157...	32.50
A-3250...	6.98	A-4703...	10.73	A-8128...	11.70	A-8276...	10.10	C-2341...	21.60	HO-267...	12.23	P-3064...	9.04	P-6385...	39.68	P-8158...	18.75
A-3303...	10.88	A-4705...	4.95	A-8129...	12.20	A-8277...	11.10	C-2343...	2.53	HO-268...	10.34	P-4004...	24.21	P-6387...	90.13	P-8159...	29.40
A-3304...	10.71	A-4706...	3.61	A-8130...	12.20	A-8278...	10.76	C-2344...	1.86	HO-269...	10.62	P-4019...	8.40	P-6389...	106.81	P-8160...	27.60
A-3307...	13.20	A-4708...	4.88	A-8131...	9.98	A-8279...	12.15	C-2345...	5.11	HO-270...	9.99	P-4022...	13.93	P-6390...	130.55	P-8161...	31.64
A-3310...	9.50	A-4709...	8.66	A-8132...	15.00	A-8280...	9.99	C-2346...	2.87	HO-271...	11.10	P-4026...	4.60	P-6410...	13.23	P-8162...	29.16
A-3311...	11.51	A-4711...	5.25	A-8133...	16.82	A-8281...	10.55	C-2685...	5.92	HO-272...	11.10	P-4047...	14.10	P-6415...	39.20	P-8163...	28.31
A-3315...	14.04	A-4713...	3.53	A-8134...	15.23	A-8282...	10.62	C-2686...	10.09	HO-273...	11.20	P-4060...	8.78	P-6425...	5.83	P-8164...	27.00
A-3327...	3.06	A-4719...	8.27	A-8135...	13.00	A-8283...	11.76	C-2687...	13.28	HO-274...	11.50	P-4061...	8.56	P-6426...	2.78	P-8165...	31.75
A-3328...	2.28	A-4722...	7.22	A-8136...	12.70	A-8284...	11.10	C-2688...	15.29	HO-275...	12.00	P-4062...	9.09	P-6428...	10.35	P-8166...	32.80
A-3329...	2.28	A-4723...	3.59	A-8137...	11.90	A-8285...	13.00	C-2689...	22.43	HO-276...	14.40	P-4063...	11.10	P-6429...	14.05	P-8167...	33.52
A-3330...	3.30	A-4742...	5.22	A-8138...	11.10	A-8286...	13.93	C-2690...	13.36	HO-277...	16.00	P-4064...	13.93	P-6430...	9.17	P-8168...	31.36
A-3332...	2.31	A-4744...	3.36	A-8139...	11.10	A-8287...	10.50	C-2691...	17.02	HO-278...	12.00	P-4065...	13.51	P-6431...	13.90	P-8169...	28.52
A-3335...	5.25	A-4745...	9.44	A-8140...	8.90	A-8288...	10.73	C-2704...	5.11	HO-279...	11.10	P-4062...	8.05	P-6432...	13.89	P-8170...	27.74
A-3336...	3.31	A-4747...	5.25	A-8141...	7.10	A-8289...	10.28	C-2705...	12.05	HO-280...	14.09	P-4063...	8.44	P-6433...	11.92	P-8171...	30.00
A-3337...	3.89	A-4748...	5.00	A-8142...	8.56	A-8291...	12.00	C-2706...	10.10	HO-281...	15.00	P-4066...	38.14	P-6454...	6.67	P-8172...	23.52
A-3496...	4.50	A-4749...	8.09	A-8143...	5.73	A-8292...	12.00	DI-1A...	12.82	HO-282...	14.23	P-4068...	7.09	P-6455...	7.22	P-8173...	7.77
A-3800...	11.45	A-4752...	4.88	A-8144...	5.31	A-8293...	12.93	DI-2A...	12.29	HO-283...	9.92	P-4069...	11.04	P-6456...	6.37	P-8174...	8.05
A-3801...	14.60	A-4761...	18.51	A-8145...	7.15	A-8294...	12.00	DI-3A...	12.29	HO-284...	12.00	P-4091...	11.16	P-6457...	21.15	P-8175...	13.09
A-3802...	20.02	A-4762...	17.46	A-8146...	5.05	A-8295...	12.00	DI-9A...	14.29	HO-285...	9.60	P-4096...	12.04	P-6458...	7.84	P-8176...	17.60
A-3808...	25.21	A-4763...	21.63	A-8147...	4.90	A-8296...	10.20	DI-10A...	12.29	HO-286...	15.75	P-4097...	13.04	P-6459...	9.10	P-8177...	15.99
A-3812...	4.06	A-4765...	19.18	A-8148...	5.73	A-8297...	13.25	DI-11A...	15.12	HO-287...	12.21	P-5000...	9.66	P-6461...	14.65	P-8178...	15.35
A-3817...	5.00	A-4770...	8.77	A-8149...	4.56	A-8298...	13.40	DI-12A...	13.62	HO-288...	9.50	P-5002...	41.42	P-6462...	9.32	P-8181...	5.48
A-3818...	8.20	A-4773...	8.66	A-8150...	6.90	A-8299...	13.98	DI-13A...	17.30	HO-289...	10.62	P-5008...	13.04	P-6463...	13.09	P-8190...	4.60
A-3820...	17.87	A-4774...	5.42	A-8151...	6.00	C-1001...	5.98	DI-14A...	12.90	HO-290...	10.29	P-5009...	14.82	P-6464...	11.56	P-8191...	4.95
A-3822...	3.25	A-4778...	6.62	A-8220...	13.98	C-1002...	4.80	DI-15A...	13.40	HO-291...	11.15	P-5014...	7.78	P-6465...	3.30	P-8192...	5.44
A-3823...	5.62	A-4779...	3.84	A-8221...	12.70	C-1003...	3.61	DI-16A...	15.60	HO-292...	9.99	P-5015...	7.92	P-6466...	5.65	P-8193...	14.35
A-3824...	5.49	A-4780...	6.70	A-8222...	12.62	C-1080...	2.75	DI-17A...	14.71	HO-293...	14.57	P-5016...	10.09	P-6467...	5.33	P-8194...	24.40
A-3825...	4.38	A-7947...	4.89	A-8223...	11.76	C-1215...	2.67	DI-18A...	14.50	HO-294...	11.10	P-5059...	22.21	P-6468...	21.32	P-8195...	23.08
A-3829...	28.08	A-7949...	5.73	A-8224...	15.50	C-1227...	3.00	DI-19A...	14.40	HO-295...	12.45	P-5062...	13.23	P-6469...	5.44	P-8307...	21.07
A-3830...	7.50	A-8050...	22.74	A-8225...	15.50	C-1277...	3.00	DI-20A...	13.76	HO-296...	12.75	P-5063...	14.04	P-6470...	9.00	P-8331...	24.02
A-3831...	4.50	A-8051...	22.74	A-8226...	15.50	C-1279...	2.75	DI-21A...	12.65	HO-297...	12.75	P-5064...	16.54	P-6471...	9.00	P-8332...	26.50
A-3833...	4.77	A-8052...	22.74	A-8227...	9.40	C-1325...	2.75	DI-22A...	14.46	HO-298...	11.40	P-5065...	22.96	P-6472...	9.00	P-8333...	25.38
A-3836...	4.66	A-8053...	22.74	A-8228...	9.40	C-1333...	2.75	DI-23A...	14.50	HO-299...	12.00	P-5066...	11.34	P-6473...	9.60	P-8334...	28.00
A-3837...	6.69	A-8054...	22.74	A-8229...	8.99	C-1355...	4.42	DI-24A...	12.90	HO-300...	11.10	P-6007...	18.96	P-6474...	9.00	P-8335...	28.91
A-3838...	8.84	A-8056...	22.74	A-8230...	12.50	C-1400...	7.90	DI-25A...	12.90	HO-301...	12.20	P-6008...	20.18	P-6476...	9.60	P-8336...	22.32
A-3839...	8.05	A-8060...	22.74	A-8231...	12.50	C-1401...	9.92	DI-26A...	18.10	HO-302...	12.00	P-6010...	10.87	P-6477...	5.16	P-8337...	23.96
A-3841...	8.33	A-8061...	22.74	A-8232...	12.50	C-1402...	11.62	DI-27A...	17.41	HO-303...	11.00	P-6011...	11.82	P-6478...	5.89	P-8338...	31.30
A-3842...	9.50	A-8062...	22.74	A-8233...	12.50	C-1403...	19.49	DI-28A...	11.75	HO-304...	13.25	P-6012...	13.62	P-6479...	7.92	P-8339...	23.69
A-3845...	9.73	A-8063...	22.74	A-8234...	7.95	C-1404...	25.38	DI-29A...	11.90	HO-305...	13.25	P-6013...	14.71	P-6480...	6.51	P-8340...	31.30
A-3848...	4.33	A-8064...	22.74	A-8235...	9.15	C-1405...	67.97	DI-30A...	12.34	HO-306...	15.75	P-6014...	15.71	P-6481...	7.50	P-8341...	27.52
A-3849...	5.62	A-8066...	22.74	A-8236...	13.20	C-1410...	7.56	DI-31A...	14.88	HO-307...	14.35	P-6119...	10.93	P-6482...	14.18	P-8342...	29.89
A-3850...	5.53	A-8072...	27.80	A-8237...	11.50	C-1411...	9.45	DI-32A...	14.50	HO-308...	14.35	P-6123...	157.38	P-6483...	9.67	P-8343...	29.89
A-3851...	12.34	A-8080...	4.85	A-8238...	11.34	C-1412...	11.60	DI-33A...	11.65	HO-309...	10.00	P-6124...	70.20	P-6484...	9.60	P-8344...	27.11
A-3852...	6.78	A-8081...	5.27	A-8239...	11.87	C-1413...	19.13	DI-34A...	12.50	HO-310...	12.00	P-6125...	113.03	P-6485...	9.66	P-8345...	27.52
A-3856...	4.84	A-8082...	6.10	A-8240...	12.00	C-1414...	26.16	DI-35A...	11.73	HO-311...	8.75	P-6131...	12.25	P-6486...	10.93	P-8346...	28.80
A-3857...	4.00	A-8090...	2.95	A-8241...	10.81	C-1415...	80.68	DI-36A...	15.43	HO-312...	8.38	P-6133...	6.33	P-6487...	9.20	P-8347...	33.24
A-3859...	7.10	A-8091...	3.50	A-8242...	11.10	C-1420...	7.73	DI-37A...	13.82	HO-313...	8.95	P-6134...	3.50	P-6488...	7.45	P-8348...	26.53
A-3870...	6.92	A-8092...	3.50	A-8243...	9.04	C-1421...	7.73	DI-38A...	14.93	HO-314...	8.02	P-6135...	9.34	P-6489...	6.92	P-8349...	30.97
A-3871...	7.40	A-8093...	3.61	A-8244...	11.23	C-1515...	3.59	DI-39A...	13.50	HO-315...	9.45	P-6137...	13.65	P-6490...	5.55	P-8350...	29.80
A-3872...	7.77	A-8094...	6.78	A-8245...	12.00	C-1645...	10.98	DI-40A...	16.50	HO-316...	8.95	P-6138...	12.15	P-6491...	6.65	P-8351...	26.53
A-3876...	2.47	A-8095...	4.48	A-8246...	11.93	C-1646...	11.34	DI-41A...	14.70	HO-317...	9.04	P-6139...	12.50	P-6492...	18.24	P-8352...	22.96
A-3877...	2.47	A-8096...	6.00	A-8247...	15.20	C-1702...	11.29	DI-42A...	14.52	HO-318...	9.04	P-6141...	30.22	P-6493...	6.89	P-8353...	31.05
A-3878...	2.53	A-8097...	7.20	A-8248...	15.93	C-1703...	10.34	DI-43A...	18.78	HO-319...	11.12	P-6143...	18.82	P-6494...	6.20	P-8354...	26.44
A-3879...	2.47	A-8098...	13.57	A-8249...	11.10	C-1706...	2.14	DI-44A...	15.00	HO-320...	9.64	P-6144...	12.99	P-6495...	7.14	P-8355...	19.73
A-3880...	7.31	A-8099...	4.17	A-8250...	11.10	C-1707...	2.36	DI-45A...	22.05	HO-321...	12.10	P-6146...	13.04	P-6496...	19.49	P-8356...	18.62
A-3881...	2.72	A-8101...	2.95	A-8251...	11.10	C-1708...	4.00	DI-46									



STANCOR® TRANSFORMERS

THE PREFERRED CHOICE
FOR EVERY MODERN CIRCUIT REQUIREMENT

A Complete Line in Stock
Available for Immediate Shipment
Coast-To-Coast Distribution

SALES REPRESENTATIVES

ARIZONA, Phoenix
W. Bert Knight Co.
P.O. Box No. 11394
YE 7-2060

CALIFORNIA, Los Angeles 64
W. Bert Knight Company
10377 West Pico Boulevard
BRadshaw 2-0101

CALIFORNIA, San Francisco 3
Moulthrop and Hunter
165-11th Street
UNderhill 3-7880

COLORADO, Denver 9
Ronald G. Bowen Company
721 South Broadway
RAce 2-4641, 4642

DISTRICT OF COLUMBIA, Washington 10
S. K. Macdonald, Incorporated
14th and Park Road, North West
COlumbia 5-3938

FLORIDA, Pompano Beach
Hollingsworth and Still
2770 N.E. 53rd St.
Miami, WH 1-4000

FLORIDA, Winter Park
Hollingsworth & Still
1211 Oaks Blvd.
MI 7-4150

GEORGIA, Atlanta 3
Hollingsworth and Still
508 Whitehead Building
MUrray 8-5878

HAWAII, Honolulu 3
Don H. Burcham Co.
P.O. Box 2845
269-781

ILLINOIS, River Forest
George Pettitt, Incorporated
349 North Ashland
CO 1-0342, FO 9-8940

LOUISIANA, New Orleans
Cartwright and Bean, Marion O. Aime
821 Pontalba
AUdubon 2264

MARYLAND, Baltimore 14
S. K. Macdonald, Incorporated
2016 Winford Road
IDlewood 5-1760

MASSACHUSETTS, Wellesley Hills 81
Michael Scott Company
336 Washington St.
CEdar 5-0102

MICHIGAN, Detroit 19
R. C. Merchant & Co., Inc.
18411 W. McNichols Rd.
KENwood 5-6000

MINNESOTA, Minneapolis 2
Nick J. Laub Company
3749 W. Broadway
JUmpier 8-4663

MISSOURI, Kansas City 11
W. E. Fry and Company
406 West 34th Street
JEfferson 1-5236

MISSOURI, St. Louis 20
W. E. Fry and Company
6616 W. Florissant
EVERgreen 2-3500, 01

NEW MEXICO, Albuquerque
R. G. Bowen, Carl Carlberg
225-A San Mateo Blvd., N. E.
AM 5-1579

NEW YORK, Buffalo 3
R. W. Mitscher
487 Ellicott Square Building
TL 4-2517

NEW YORK, New York 6
F. Edwin Schmitt Co.
136 Liberty St.
WOth 2-6550/6551

NORTH CAROLINA, Charlotte 9
Hollingsworth & Still
4837 Gilmore Drive
JAckson 3-2966

OHIO, Columbus 15
McFadden Sales Co.
150 East Broad Street
CApital 1-3363

OKLAHOMA, Tulsa 20
R. E. Nesbitt Co.
1324 E. 17th Place
LU 5-1234

OREGON, Portland 8
Don H. Burcham Company
P. O. Box 4098
CA 6-4148

PENNSYLVANIA, Philadelphia 2
S. K. Macdonald, Incorporated
1531 Spruce Street
Kingsley 5-1205

PENNSYLVANIA, Pittsburgh 22
S. K. Macdonald, Inc.
335 Fifth Ave.
ATlantic 1-2253

TENNESSEE, Memphis 4
Cartwright and Bean
560 So. Cooper St.
BRoadway 6-4442

TEXAS, Dallas 1
R. E. Nesbitt Co.
1925 Cedar Springs
RI 7-5824/4145

TEXAS, Houston 6
R. E. Nesbitt Co.
4810 Hazard
JA 8-3811

UTAH, Salt Lake City 11
R. G. Bowen Company
463 E. 3rd South
EM 3-4528

WASHINGTON, Seattle 1
Don H. Burcham Company
2517 Second Ave.
MA 2-5512

WISCONSIN, Brookfield
George Pettitt Co.
1105 Forest Lane
SU 2-6026

STANCOR ELECTRONICS, INC., Formerly Chicago Standard Transformer Corp.

3501 WEST ADDISON • CHICAGO 18, ILLINOIS • INdependence 3-7400

WESTERN WAREHOUSE:
10377 West Pico Blvd.
Los Angeles 64, California
BRadshaw 2-0101

EASTERN OFFICE:
136 Liberty St.
New York 6, New York
WOth 2-6586

EXPORT SALES:
Roburn Agencies, Incorporated
Cable: Roburnage, 431-5 Greenwich St.
New York 13, New York
WOth 6-2130